


DIMENSIONS mm (inches)

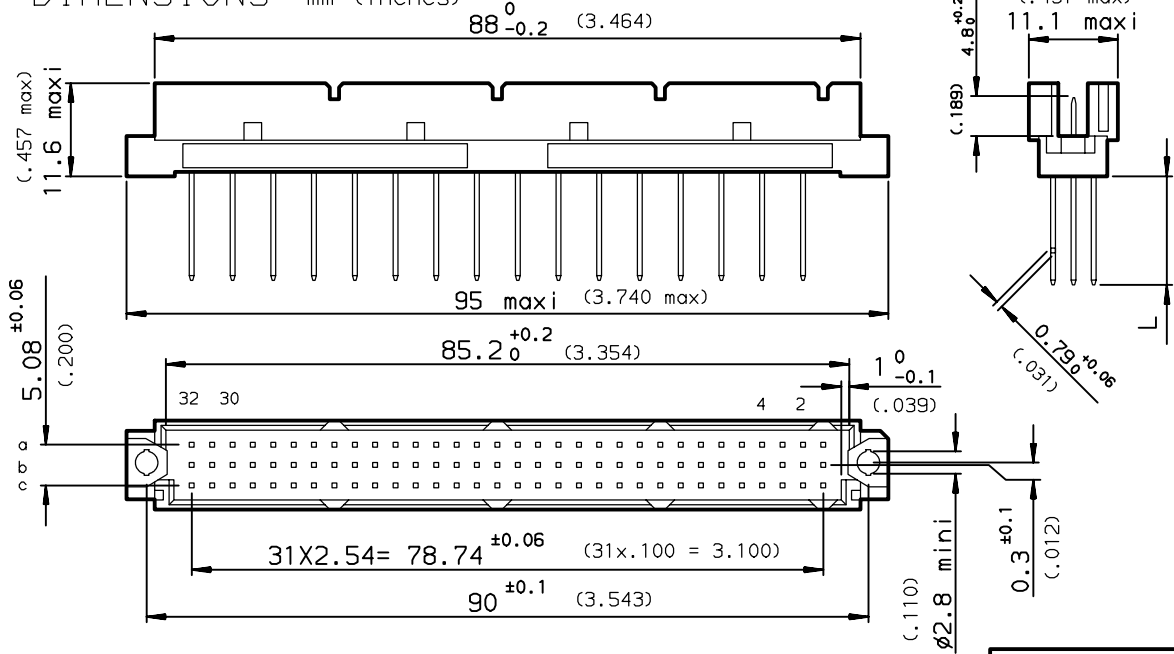


GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C-8609-0000B

PART NUMBER	8609			78		7		8	
PIN OUT									
rows a-b-c				3		48			
rows a-c				4		32			
NUMBER OF CONTACTS									
TERMINATION									
L = 13.3 ± 0.25 (.523)				WW				15	
L = 17.95 ± 0.25 (.706)				WW				25	
PERFORMANCE CLASS									
DIN 41612 class 3									4
DIN 41612 class 2									5
DIN 41612 class 1									6
TERMINATION TYPE									
TIN LEAD									000E1
LEAD FREE									E1LF

PCB DRILLING

component side

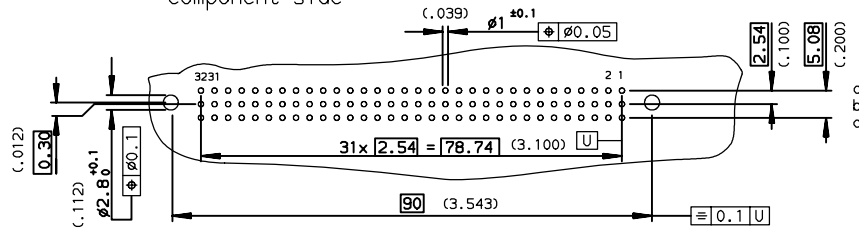

European Views

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1997/10/28	ANGULAR	0.X	±0.1	size	Scale
Eng	TARON	1997/10/28	LINEAR	0.XX	±0.1	A3	1.5
Chr	LEGARE	1997/10/28	0.XX' ±2'	0.XXX	±0.1	ECN	L506-0095
Appr	LEGARE	1997/10/28	Product family	DIN 8609		Spec ref	-
FCJ		title			STRAIGHT MALE - STYLE R		Rev.
		catalog no			WIRE WRAP		C
		dwg no			C-8609-0642		sheet 1 of 1

rev	ecn no	dr	date
A	-	-	1997/10/28
B	L505-008	JTA	2005/03/17
C	L506-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-