



DIMENSIONS mm (inches)

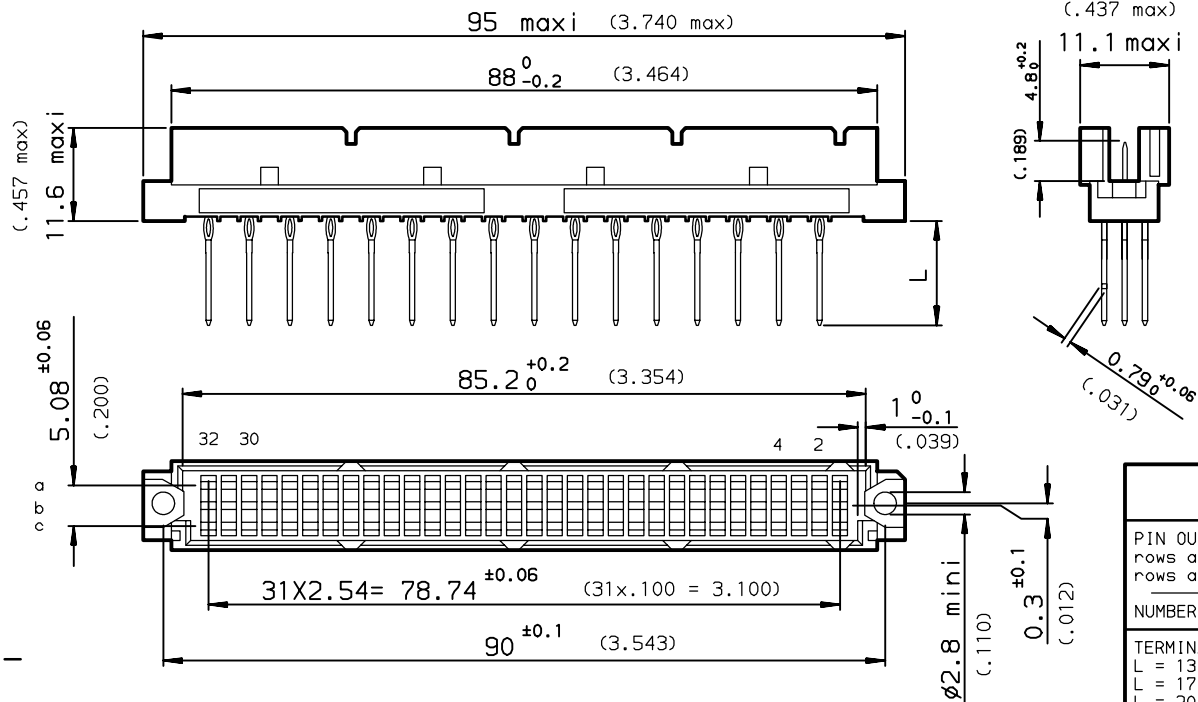

PCB DRILLING

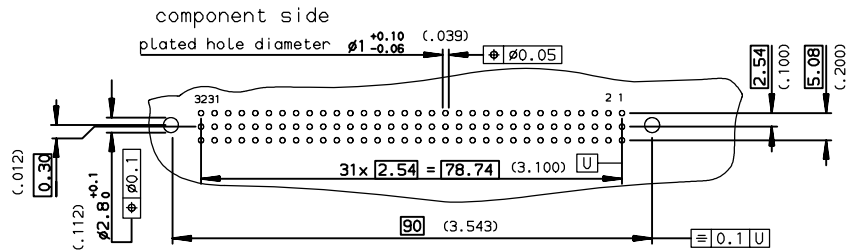

PART NUMBER	8609			78		7		8	
PIN OUT									
rows a-b-c				3		48			
rows a-c				4		32			
NUMBER OF CONTACTS									
TERMINATION									
L = 13.25 ±0.25 (.521)				1 wrap					91
L = 17.25 ±0.25 (.679)				2 wraps					92
L = 20.00 ±0.25 (.787)				3 wraps					93
L = 4.20 ±0.25 (.165)				short post					94
PERFORMANCE CLASS									
DIN 41612 class 3									4
DIN 41612 class 2									5
DIN 41612 class 1									6
TERMINATION TYPE									
TIN LEAD									000E1
LEAD FREE									E1LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface	tolerance std	projection	mm	
		ISO 1302	ISO 406 ISO 1101			
		TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	ROUILLARD	1997/10/28	0.X	±0.1	size	Scale
Eng	TARON	1997/10/28	ANGULAR	0.XX	A3	1.5
Chr	LEGARE	1997/10/28	0.XX' ±2'	0.XXX	ECN	LS06-0095
Appr	LEGARE	1997/10/28	Product family		DIN 8609	Spec ref -
		title			Rev.	
		STRAIGHT MALE - STYLE R			C-8609-0643	
		PRESS FIT			E	
		catalog no			CUSTOMER sheet 1 of 1	

rev	ecn no	dr	date
C	-	ROU	1999/04/22
D	LS05-004	JTA	2005/02/26
E	LS06-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-



Copyright FCI.