



DIMENSIONS mm (inches)

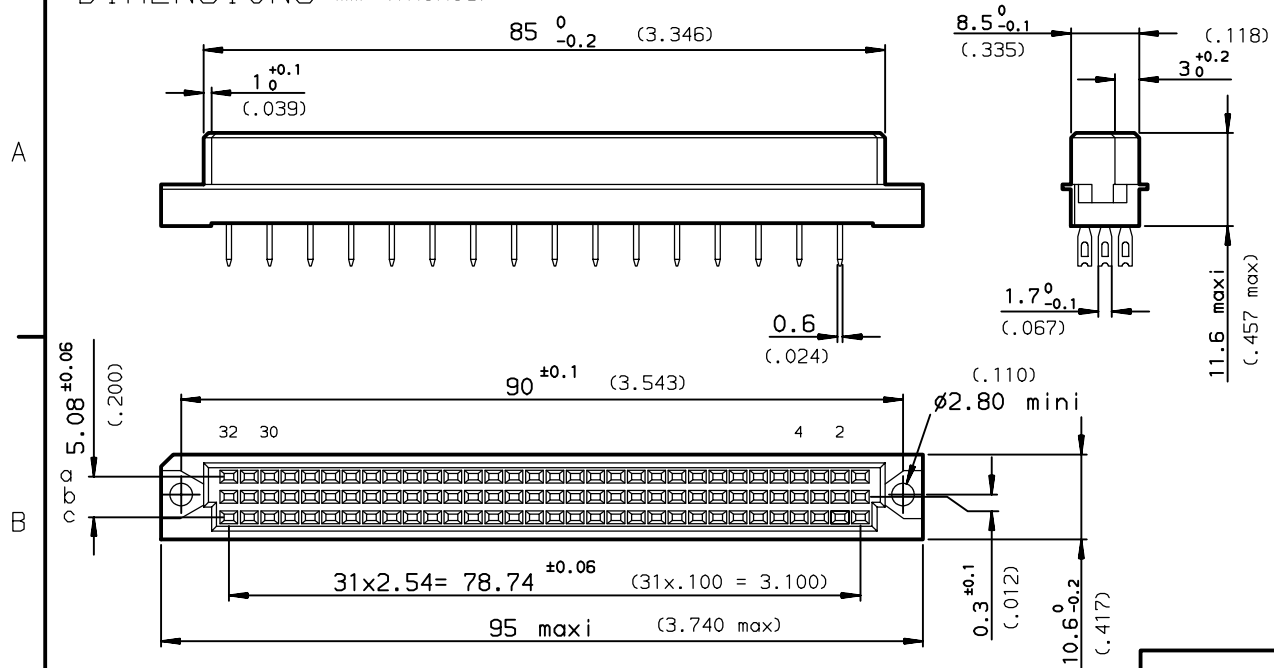

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C-8609-0000B

PART NUMBER	8609			81		7		8	
PIN OUT									
rows a-b-c				3		48			
rows a-c				4		32			
NUMBER OF CONTACTS									
TERMINATION									
L1 = 5.35 ±0.35 (.210)									09
L2 = 13.35 ±0.35 (.525)									10
L1 and L2									08
PERFORMANCE CLASS									
DIN 41612 class 3									4
DIN 41612 class 2									5
DIN 41612 class 1									6
TERMINATION TYPE									
TIN LEAD									000E1
LEAD FREE									E1LF

TERMINATION

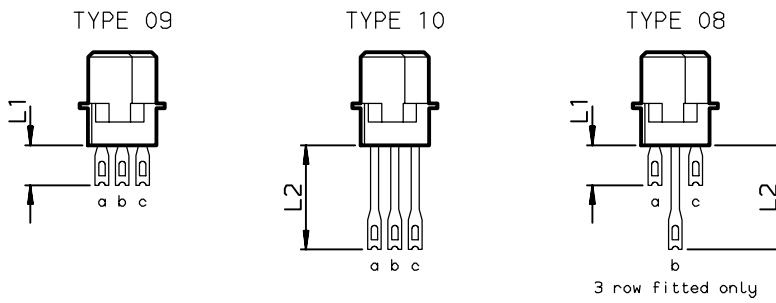

rev	ecn no	dr	date
A	-	ROU	1997/10/30
B	LS05-005	JTA	2005/03/17
C	LS06-0095	LG0	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302	<input checked="" type="checkbox"/>	tolerance std ISO 406 ISO 1101	projection 	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	ROUILLARD	1997/10/30	ANGULAR	0.X	±0.1	size A3
Eng	TARON	1997/10/30	LINEAR	0.XX	±0.1	Scale 1.5
Chr	LEGARE	1997/10/30	0.XX' ±2'	0.XXX	±0.1	ECN LS06-0095
Appr	LEGARE	1997/10/30	Product family	DIN 8609		Spec ref -
		STRAIGHT FEMALE - STYLE C			title SOLDER EYELET	
catalog no		-			dwg no C-8609-0655	
-		-			Rev. C	
-		-			CUSTOMER sheet 1 of 1	

European Views

Copyright FCI. FCJ