



DIMENSIONS mm (inches)

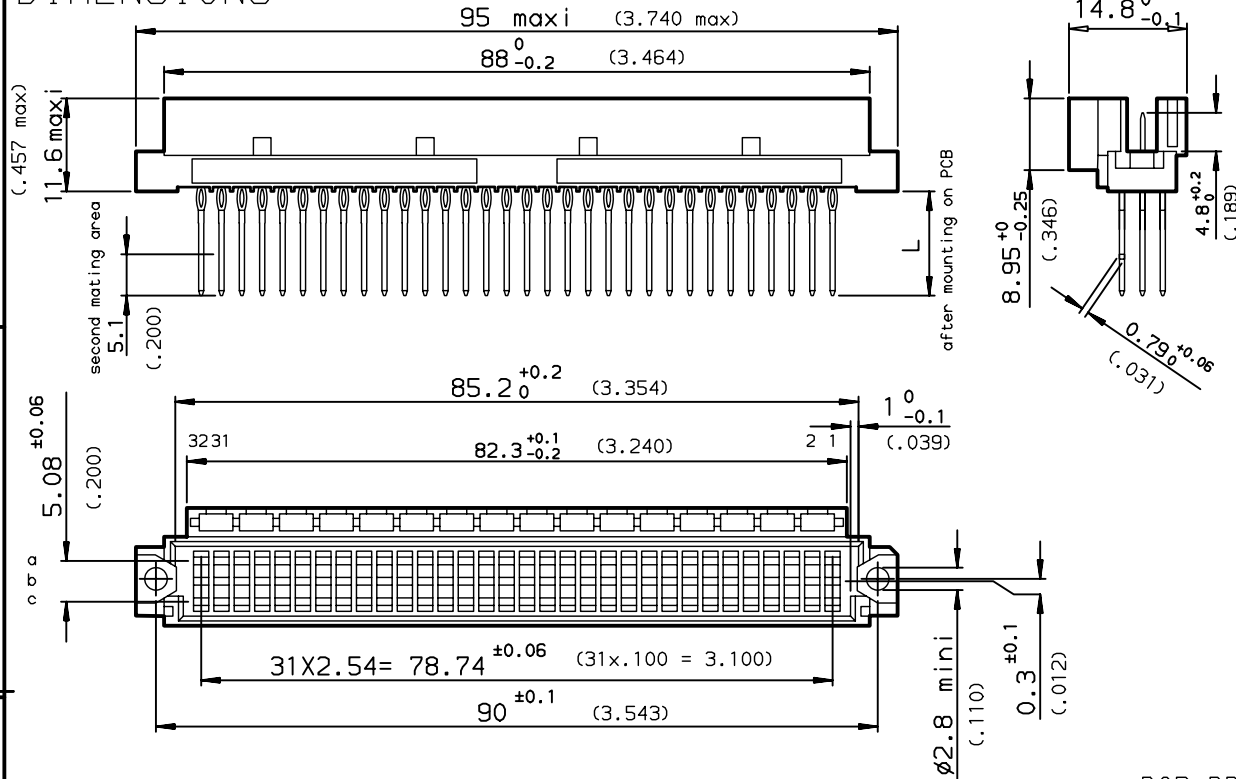

PCB DRILLING

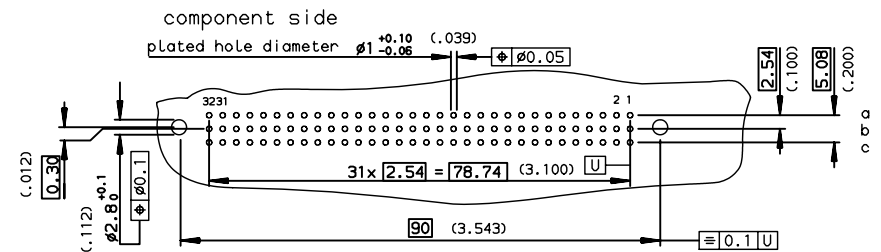

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface ISO 1302 <input checked="" type="checkbox"/>	tolerance std ISO 406 ISO 1101	projection 	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1996/09/04	ANGULAR	0.X ±0.1	size A3
Eng	TARON	1996/09/04	LINEAR	0.XX ±0.1	Scale 1.5
Chr	LEGARE	1996/09/04	0.XX' ±2'	0.XXX ±0.1	ECN LS06-0095
Appr	LEGARE	1996/09/04	Product family	DIN 8609	Spec ref -
		title STRAIGHT MALE - STYLE R			Rev. F
		PRESS FIT REAR PLUG UP WITH KEYING			dwg no C-8609-0522
catalog no		CUSTOMER			sheet 1 of 1

PART NUMBER	8609		08	7	5
PIN OUT					
rows a-b-c		3			96
rows a-c		4			64
NUMBER OF CONTACTS					
TERMINATION					
L = 13.25 ±0.25 (.521)		near plug up			96
L = 17.25 ±0.25 (.679)		near plug up + 1 wrap			97
L = 20.95 ±0.25 (.825)		near plug up + 2 wraps			98
PERFORMANCE CLASS					
DIN 41612 class 3					4
DIN 41612 class 2					
DIN 41612 class 1					
TERMINATION TYPE					
TIN LEAD					000
LEAD FREE					LF

rev	ech no	dr	date
D	-	ROU	1997/11/05
E	LS05-004	JTA	2005/02/28
F	LS06-0095	LGO	2006/07/12
-	-	-	-
-	-	-	-
-	-	-	-