



DIMENSIONS mm (inches)

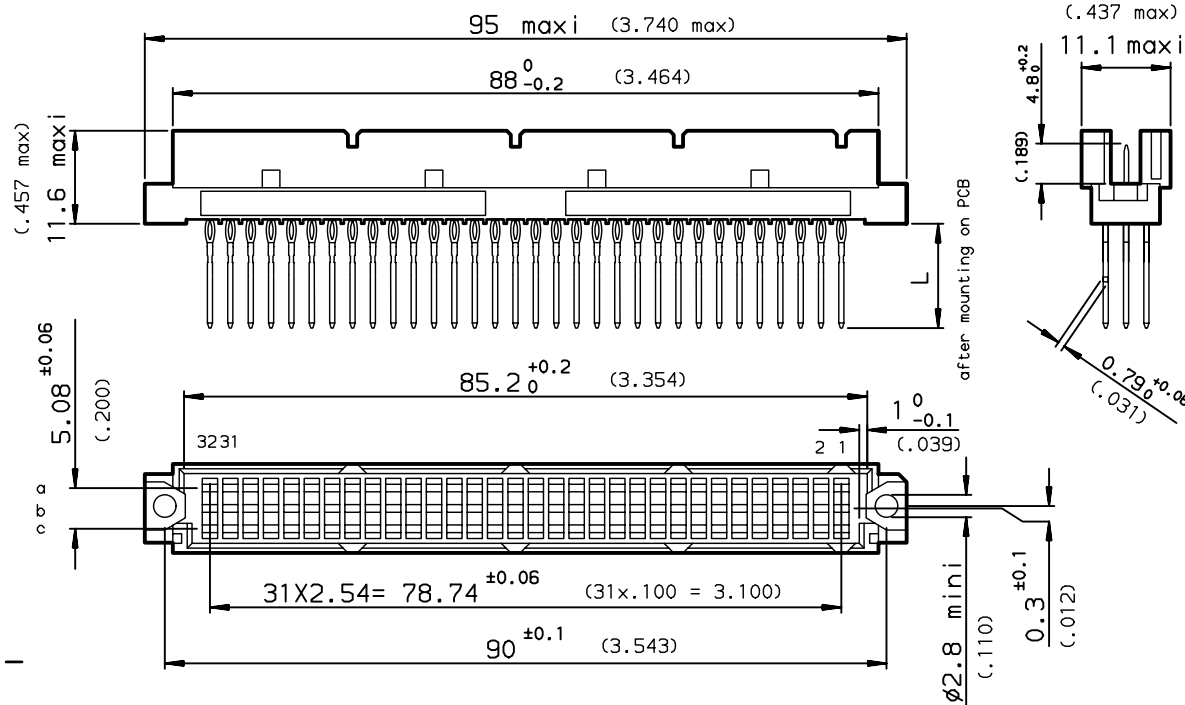

PCB DRILLING

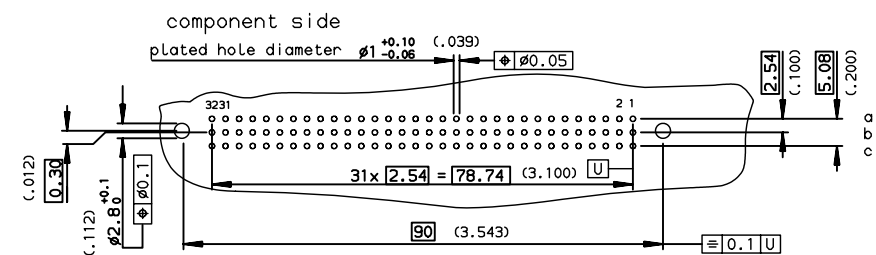

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface ISO 1302 <input checked="" type="checkbox"/>	tolerance std ISO 406 ISO 1101	projection 	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1995/09/11	0.X	±0.1	size A3
Eng	TARON	1995/09/11	ANGULAR	0.XX	Scale 1.5
Chr	LEGARE	1995/09/11	0.XX' ±2'	0.XXX	ECN LS06-0095
Appr	LEGARE	1995/09/11	Product family DIN 8609		Spec ref -
		title STRAIGHT MALE - STYLE R			Rev. F
		PRESS FIT for NOKIA			dwg no C-8609-0483
catalog no		-			CUSTOMER sheet 1 of 1

PART NUMBER	8609			78		7	9	5	
PIN OUT									
rows a-b-c									
rows a-c									
NUMBER OF CONTACTS									
TERMINATION									
L = 13.25 ±0.25 (.521)									91
L = 4.20 ±0.25 (.165)									94
PERFORMANCE CLASS									
DIN 41612 class 1									9
TERMINATION TYPE									
TIN LEAD									000E1
LEAD FREE									E1LF

rev	ecn no	dr	date
D	-	ROU	1999/04/22
E	LS05-004	JTA	2005/02/29
F	LS06-0095	LGO	2006/06/17
-	-	-	-
-	-	-	-
-	-	-	-

Copyright FCI.