



DIMENSIONS mm (inches)

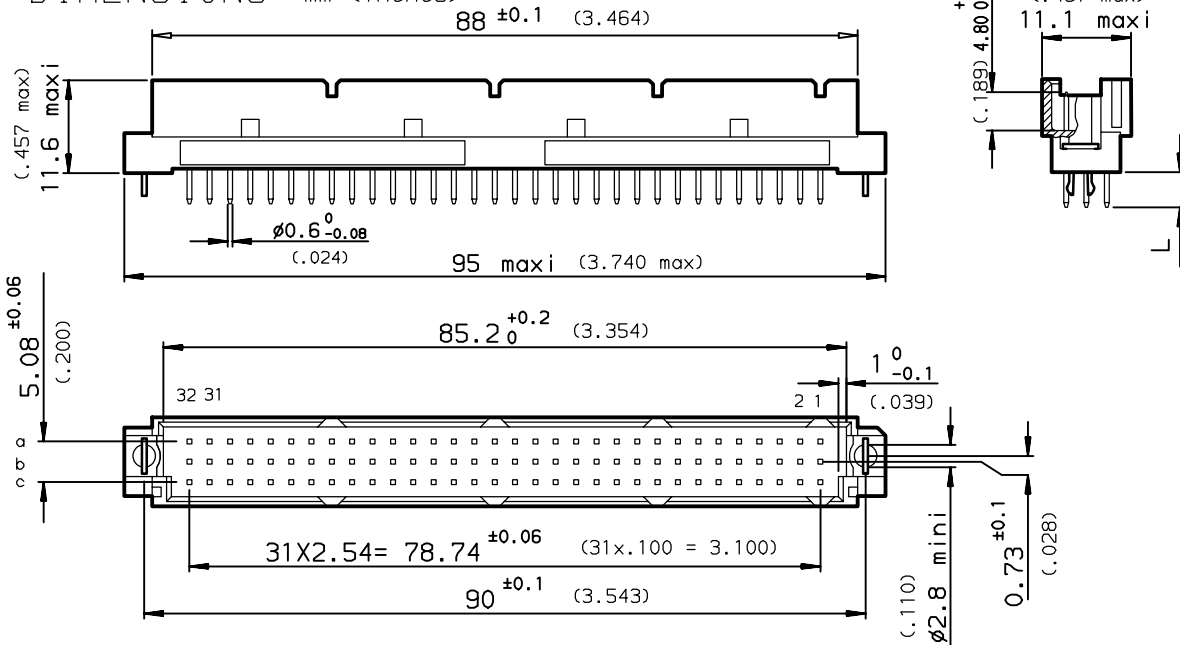

PART NUMBER	8609			79				5	
PIN OUT									
rows a-b-c				3				96	
rows a-c				4				64	
NUMBER OF CONTACTS									
TERMINATION									
L = 2.70 ±0.25 (.106)								24	
L = 4.65 ±0.25 (.183)								14	
OPTIONS									
no option								7	
with harpoons									
									H
									A
									R
PERFORMANCE CLASS									
NFC 93429 HE 1101									4
NFC 93429 HE 1102									5
NFC 93429 HE 1103									6
TERMINATION TYPE									
TIN LEAD									000E1
LEAD FREE									E1LF

PCB DRILLING

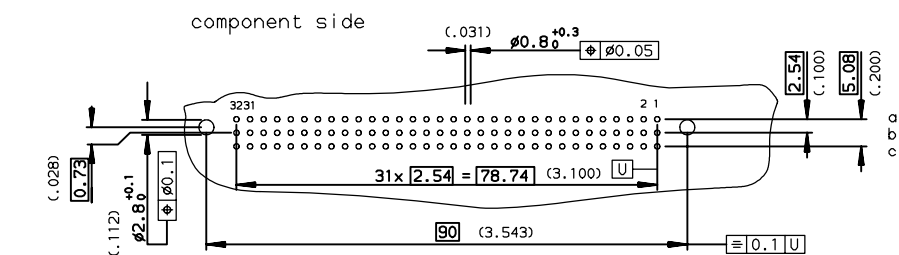

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A				European Views			
www.fciconnect.com		surface ISO 1302	<input checked="" type="checkbox"/>	tolerance std ISO 406 ISO 1101	projection	mm	
TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	ROUILLARD	1997/11/03	ANGULAR	0.X	±0.1	size	Scale
Eng	TARON	1997/11/03	LINEAR	0.XX	±0.1	A3	1.5
Chr	LEGARE	1997/11/03	0.XX' ±2'	0.XXX	±0.1	ECN	LS06-0095
Appr	LEGARE	1997/11/03	Product family	DIN 8609		Spec ref	-
FCI		STRAIGHT MALE - STYLE HE11			dwg no	C-8609-0665	
SOLDER TO BOARD		catalog no			CUSTOMER		sheet 1 of 1

rev	ecn no	dr	date
A	-	-	1997/11/03
B	LS05-001	JTA	2005/03/02
C	LS06-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-

Copyright FCI.