



DIMENSIONS mm (inches)

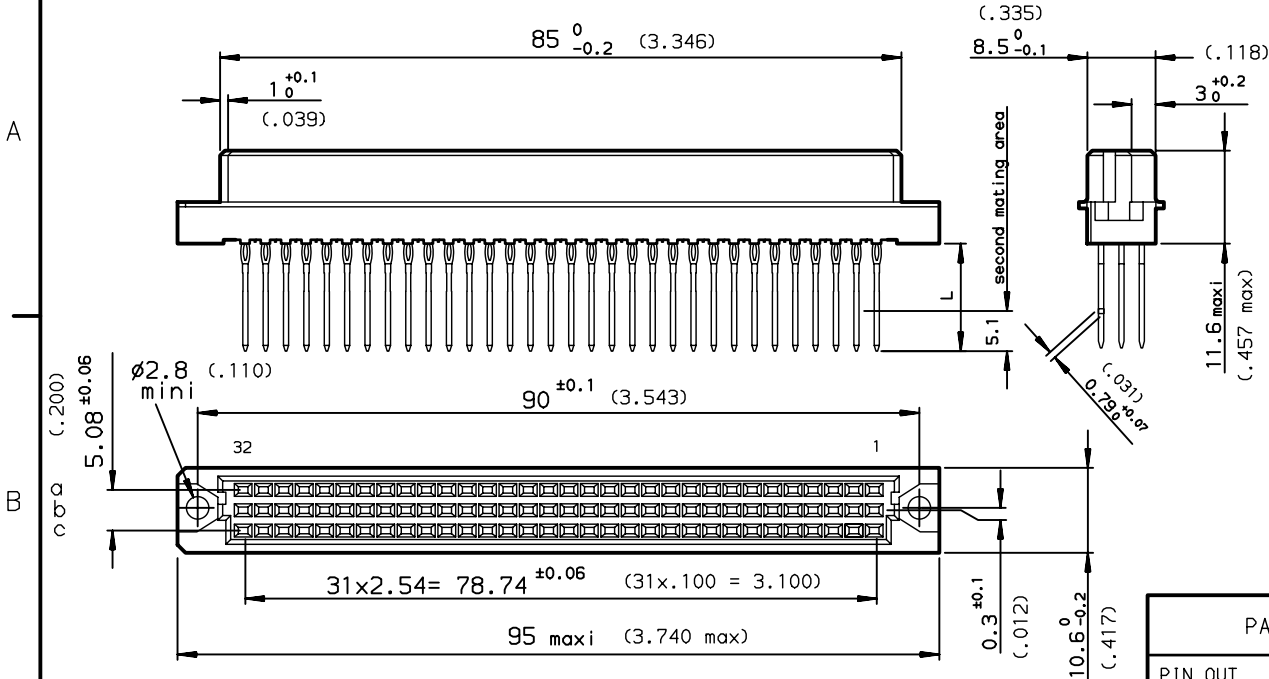


METHOD OF INSERTION
ON THE PCB = FLAT ROCK



PART NUMBER	8609			81		7	9	5	
PIN OUT									
rows a-b-c				3	-	96			
rows a-c				4	-	64			
NUMBER OF CONTACTS									
TERMINATION									
L = 13.10 ±0.20 (.515)									96
L = 17.10 ±0.20 (.673)									97
PERFORMANCE CLASS									
DIN 41612 class 1									9
TERMINATION TYPE									
TIN LEAD									000A
LEAD FREE									ALF

PCB DRILLING

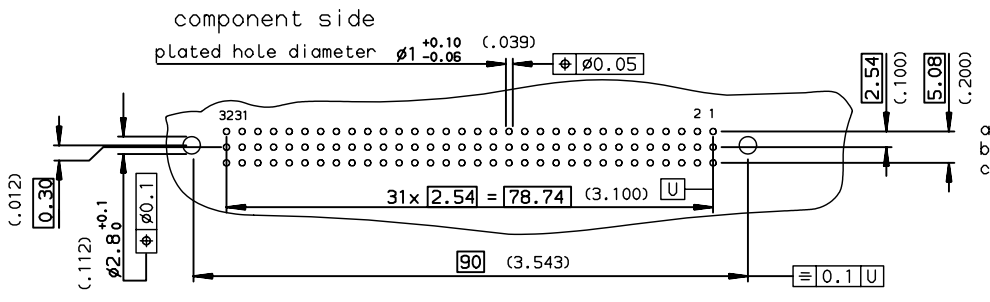

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C European Views

www.fciconnect.com	surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
	ISO 1302	ISO 406 ISO 1101	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	ROUILLARD	1994/10/27	0.X ±0.1
Eng	TARON	1994/10/27	0.XX ±0.1
Chr	LEGARE	1994/10/27	0.XX* ±2*
Appr	LEGARE	1994/10/27	0.XXX ±0.1
Product family		DIN 8609	size A3
Product family		DIN 8609	Scale 1.5
Product family		DIN 8609	ECN LS06-0095
Product family		DIN 8609	Spec ref -

rev	ecn no	dr	date
F	-	ROU	1999/11/18
G	LS05-004	JTA	2005/02/28
H	LS06-0095	LGO	2006/06/17
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

FCI title STRAIGHT FEMALE - STYLE C
PRESS FIT REAR PLUG UP for NOKIA
catalog no -

dwg no C-8609-0434
Rev. H

CUSTOMER sheet 1 of 1

Copyright FCI.