


DESCRIPTION	MAX CABLE O.D.	HOLE SIZE	PART NUMBER
OBSOLETE	3.1mm	180µm	5-504008-5
OBSOLETE	3.1mm	125µm	5-504008-4
OBSOLETE	3.1mm	500µm	5-504008-3
OBSOLETE	3.1mm	400µm	5-504008-2
OBSOLETE	3.1mm	267µm	5-504008-1
SUPERSEDED BY 5-504008-4 PLUS 502128-8	3.1mm	125µm	5-504008-0
OBSOLETE	3.1mm	140µm	4-504008-9
OBSOLETE	3.1mm	140µm	4-504008-8
OBSOLETE	3.1mm	140µm	4-504008-7
OBSOLETE	3.1mm	280µm	4-504008-6
OBSOLETE	4.3mm	600µm	4-504008-5
OBSOLETE	3.1mm	436µm	4-504008-4
OBSOLETE	3.1mm	250µm	4-504008-3
OBSOLETE	3.1mm	160µm	4-504008-2
OBSOLETE	3.1mm	231µm	4-504008-1
OBSOLETE	3.1mm	125µm	4-504008-0
OBSOLETE	3.1mm	229µm	3-504008-9
OBSOLETE	3.1mm	280µm	3-504008-8
OBSOLETE	3.1mm	126µm	3-504008-7
OBSOLETE	3.1mm	140µm	3-504008-6
OBSOLETE	4.3mm	240µm	3-504008-5
SUPERSEDED BY 1-504008-4	3.1mm	231µm	3-504008-4
OBSOLETE	4.3mm	.042 in	3-504008-3
OBSOLETE	3.1mm	640µm	3-504008-2
OBSOLETE	3.1mm	336µm	3-504008-1
SUPERSEDED BY 504008-7	3.1mm	140µm	3-504008-0
SUPERSEDED BY 504008-7	3.1mm	140µm	2-504008-9
SUPERSEDED BY 504008-4	4.3mm	125µm	2-504008-8
OBSOLETE	4.3mm	125µm	2-504008-7
SUPERSEDED BY 5-504008-4 PLUS 1-501457-2	3.1mm	125µm	2-504008-6
SUPERSEDED BY 5-504008-4 PLUS 1-501457-1	3.1mm	125µm	2-504008-5
OBSOLETE	3.1mm	125µm	2-504008-4
SUPERSEDED BY 5-504008-4 PLUS 1-502128-3	3.1mm	125µm	2-504008-3
SUPERSEDED BY 5-504008-4 PLUS 1-501457-8	3.1mm	125µm	2-504008-2
SUPERSEDED BY 5-504008-4 PLUS 1-501457-8	3.1mm	125µm	2-504008-1
SUPERSEDED BY 5-504008-4 PLUS 1-502128-1	3.1mm	125µm	2-504008-0
OBSOLETE	3.1mm	125µm	1-504008-9
SUPERSEDED BY 504008-3	3.1mm	125µm	1-504008-8
OBSOLETE	3.1mm	125µm	1-504008-7
OBSOLETE	4.3mm	410µm	1-504008-6
OBSOLETE	3.1mm	436µm	1-504008-5
OBSOLETE	3.1mm	231µm	1-504008-4
OBSOLETE	3.1mm	240µm	1-504008-3
SUPERSEDED BY 5-504008-4 PLUS 501457-8	3.1mm	125µm	1-504008-2
SUPERSEDED BY 5-504008-4 PLUS 501457-8	3.1mm	125µm	1-504008-1
SUPERSEDED BY 5-504008-4 PLUS 1-503628-5	3.1mm	125µm	1-504008-0
SUPERSEDED BY 5-504008-4 PLUS 1-503628-5	3.1mm	125µm	504008-9
OBSOLETE	4.3mm	140µm	504008-8
OBSOLETE	3.1mm	140µm	504008-7
SUPERSEDED BY 504008-8	4.3mm	140µm	504008-6
SUPERSEDED BY 504008-7	3.1mm	140µm	504008-5
OBSOLETE	4.3mm	125µm	504008-4
OBSOLETE	3.1mm	125µm	504008-3
SUPERSEDED BY 504008-4	4.3mm	125µm	504008-2
SUPERSEDED BY 504008-3	3.1mm	125µm	504008-1

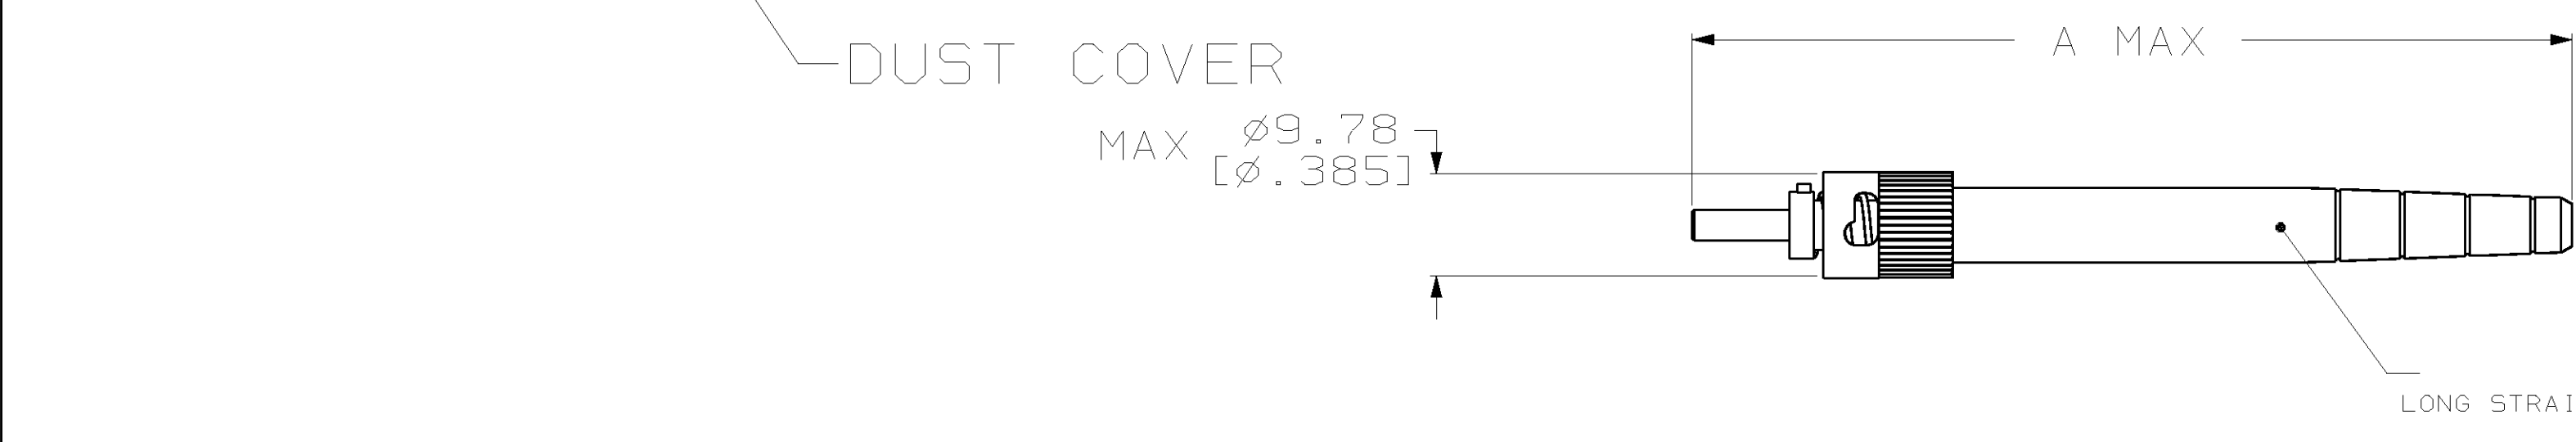

DESCRIPTION	A MAX
LONG STRAIN RELIEF	73.7[2.90]
BEND LIMITING STRAIN RELIEF	77.6[3.06]
SHORT STRAIN RELIEF (1.0 IN)	48.8[1.92]
BARE BUFFER STRAIN RELIEF	56.6[2.23]

- 1 BULK PACKAGED
- 2 FLAT END FACE
- 3 RADIUS END FACE
- 4 BARE BUFFER STRAIN RELIEF, 900µm
- 5 BEND LIMITING STRAIN RELIEF (BLACK)
- 6 SHORT STRAIN RELIEF (1.0 INCH LENGTH) (BLACK)
- 8 BEND LIMITING STRAIN RELIEF (RED)
- 9 BEND LIMITING STRAIN RELIEF (BLUE)

- 10 NO STRAIN RELIEF
  - 11 SHORT STRAIN RELIEF (1.0 INCH LG) (BLUE)
  - 12 LONG STRAIN RELIEF (BLACK)
  - 13 BEND LIMITING STRAIN RELIEF (BLUE, NO LOGO)
14. ALL KITS FOR 3.1mm MAX CABLE OD USE INSTRUCTION SHEET 408-4151.  
 15. ALL KITS FOR 4.3mm MAX CABLE OD USE INSTRUCTION SHEET 408-4162.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS (mm [INCHES])	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ±.01	1 PLC ±.02	2 PLC ±.03	3 PLC ±.04	4 PLC ±.05	ANGLES ±.01
--------------------------	--	------------	------------	------------	------------	------------	-------------

MATERIAL: SST FERRULE FINISH: -  
 ALUM REAR BODY FINISH: -

AMP Incorporated  
 Harrisburg, PA 17105-3608

CONNECTOR KIT, SST, 2.5mm BAYONET, OPTIMATE

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 504008  
 WEIGHT: -  
 CUSTOMER DRAWING