



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
F		ECR-05-005975	30-JUN-05	BM	JB		

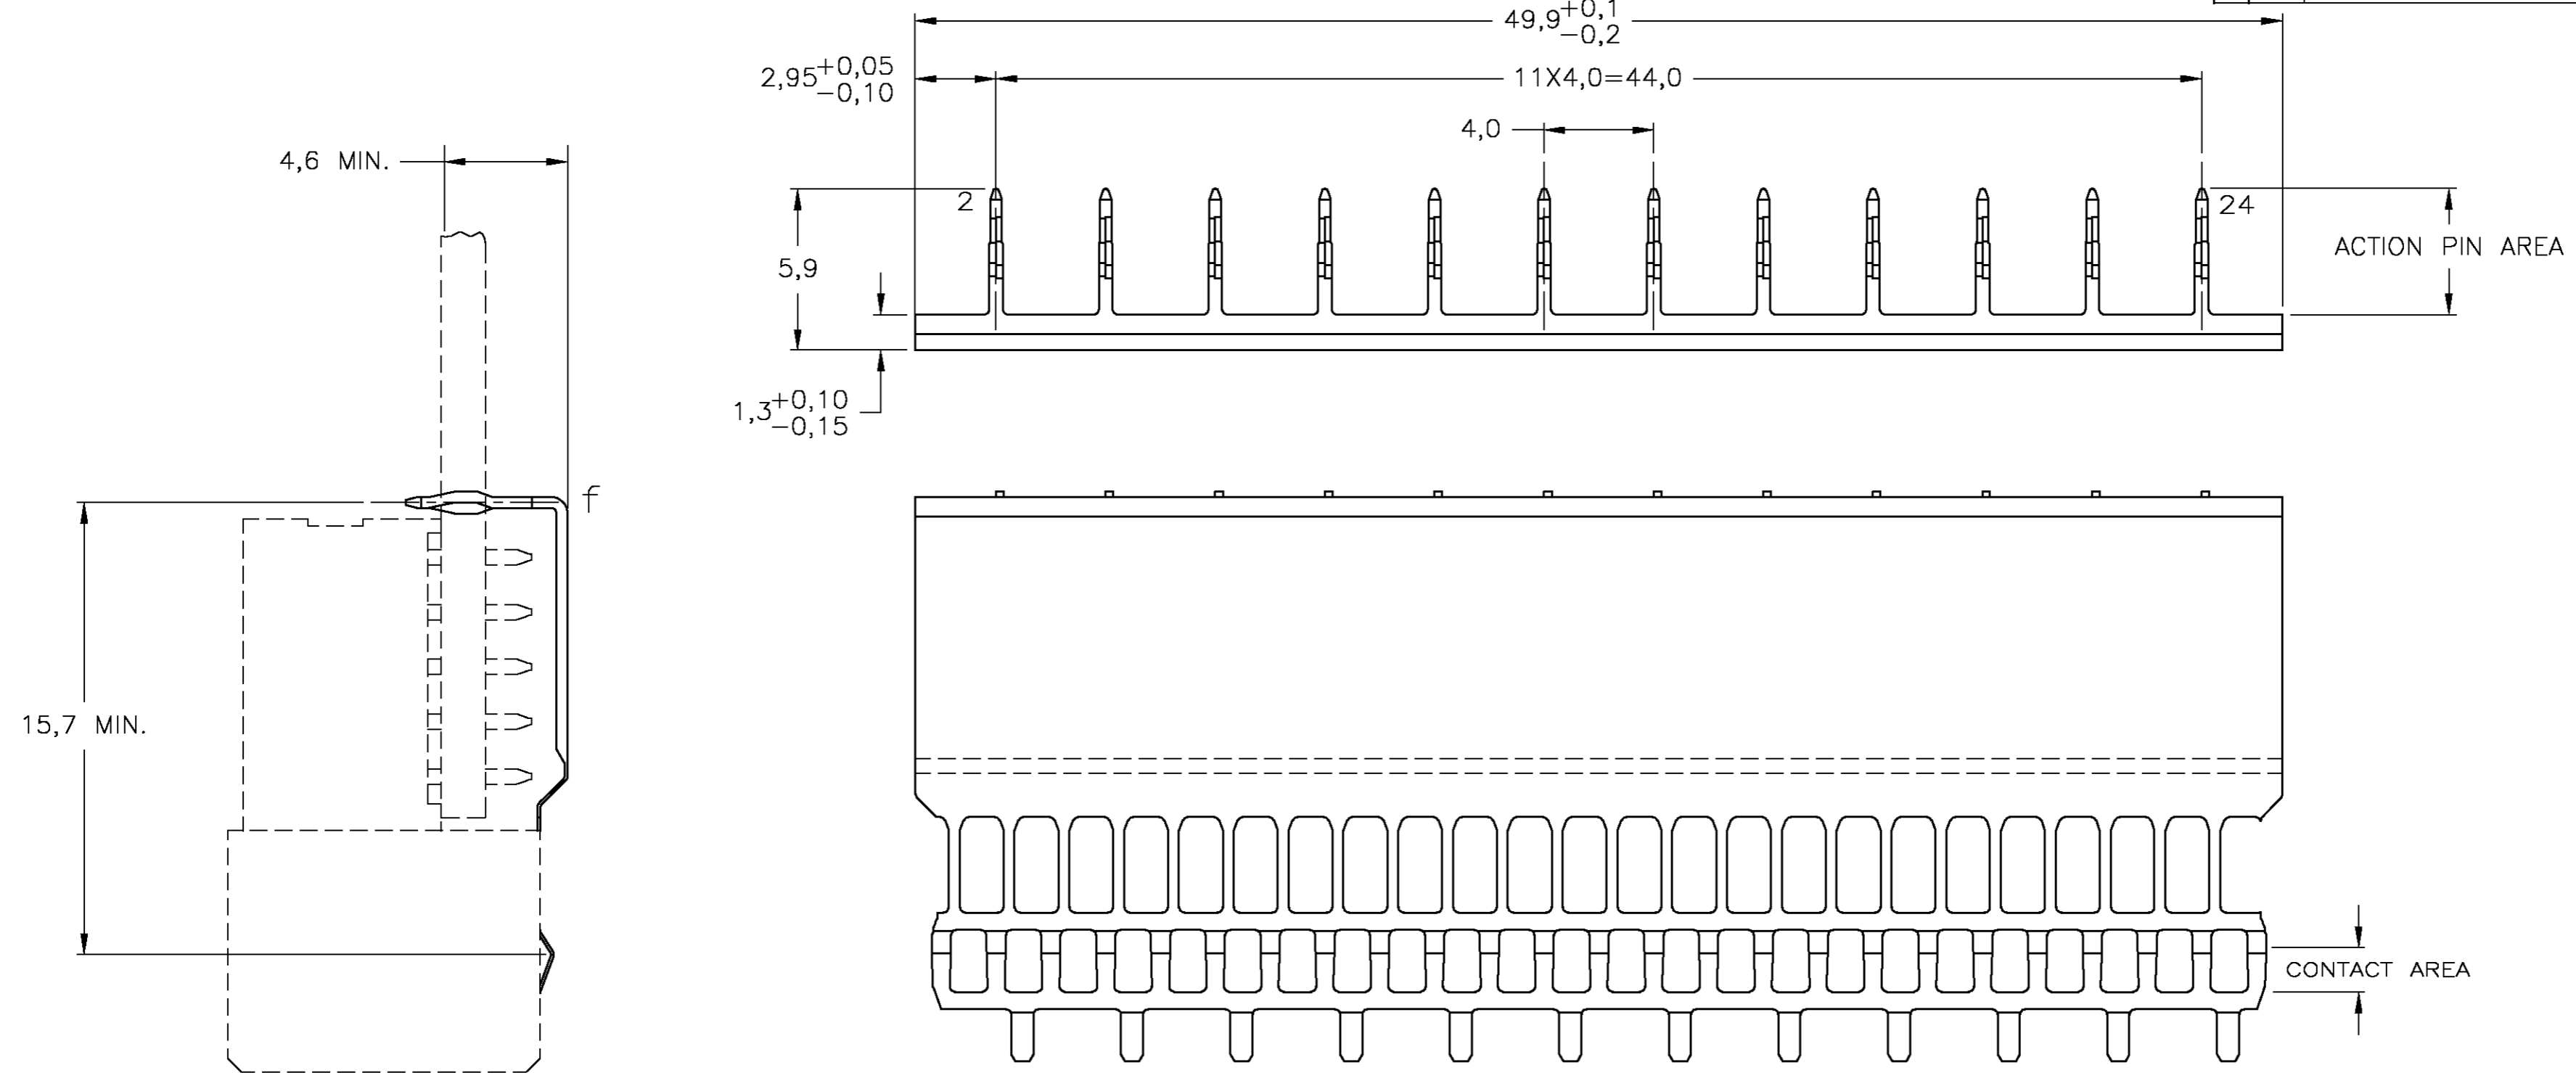

- NOTES:**
- ⚠ PLATING:  
 CONTACT AREA: 0,76μm Au MIN. OVER 1,27μm Ni MIN.  
 ACTION PIN : 0,5μm SnPb MIN.  
 REMAINDER : Ni
  - ⚠ MATERIAL; PHOSPHORBRONZE.
  - ⚠ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
  - ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-25 COLUMNS WITH UPPERSHIELD, 125+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
  - 5 MAX. BOARD THICKNESS 3,5 mm.
  - ⚠ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
- TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.

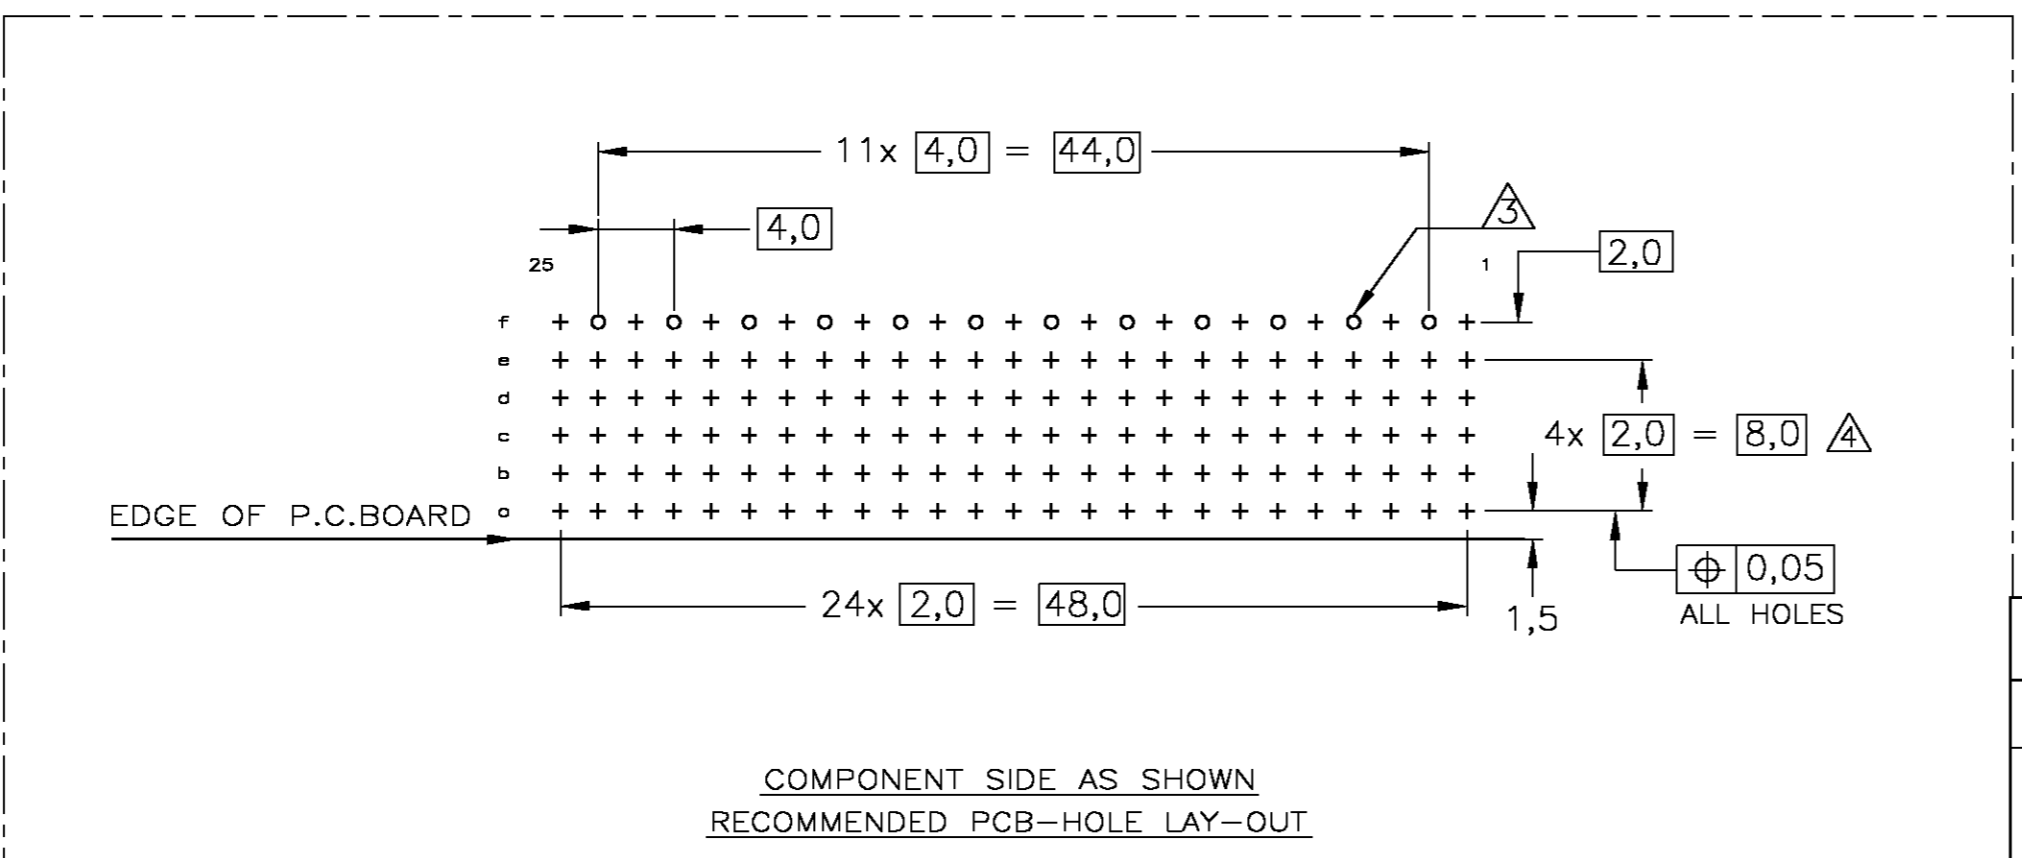

⚠ ⚠	⚠	338110-9
⚠	⚠	338110-2
FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN 27-11-96	Tyco Electronics Corporation 's-Hertogenbosch, 5222AR-32	
DIMENSIONS: mm		CHK W. v.d. HEIJDEN 27-11-96	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F. v. KONINGSBRUGGE	Z-PACK 2mm HM	
0 PLC ± -		PRODUCT SPEC 108-19082	GROUND RETURN LOWER SHIELD	
1 PLC ± -		APPLICATION SPEC 114-19029	TYPE B-25 COLUMNS	
2 PLC ± -		WEIGHT	SIZE A2	CAGE CODE 00779
3 PLC ± -		FINISH	DRAWING NO C=338110	RESTRICTED TO
4 PLC ± -			SCALE 5:1	SHEET 1 OF 1
ANGLES ± -		CUSTOMER DRAWING		REV F