



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	F	ECR-05-005975	30-JUN-05	BM	JB		

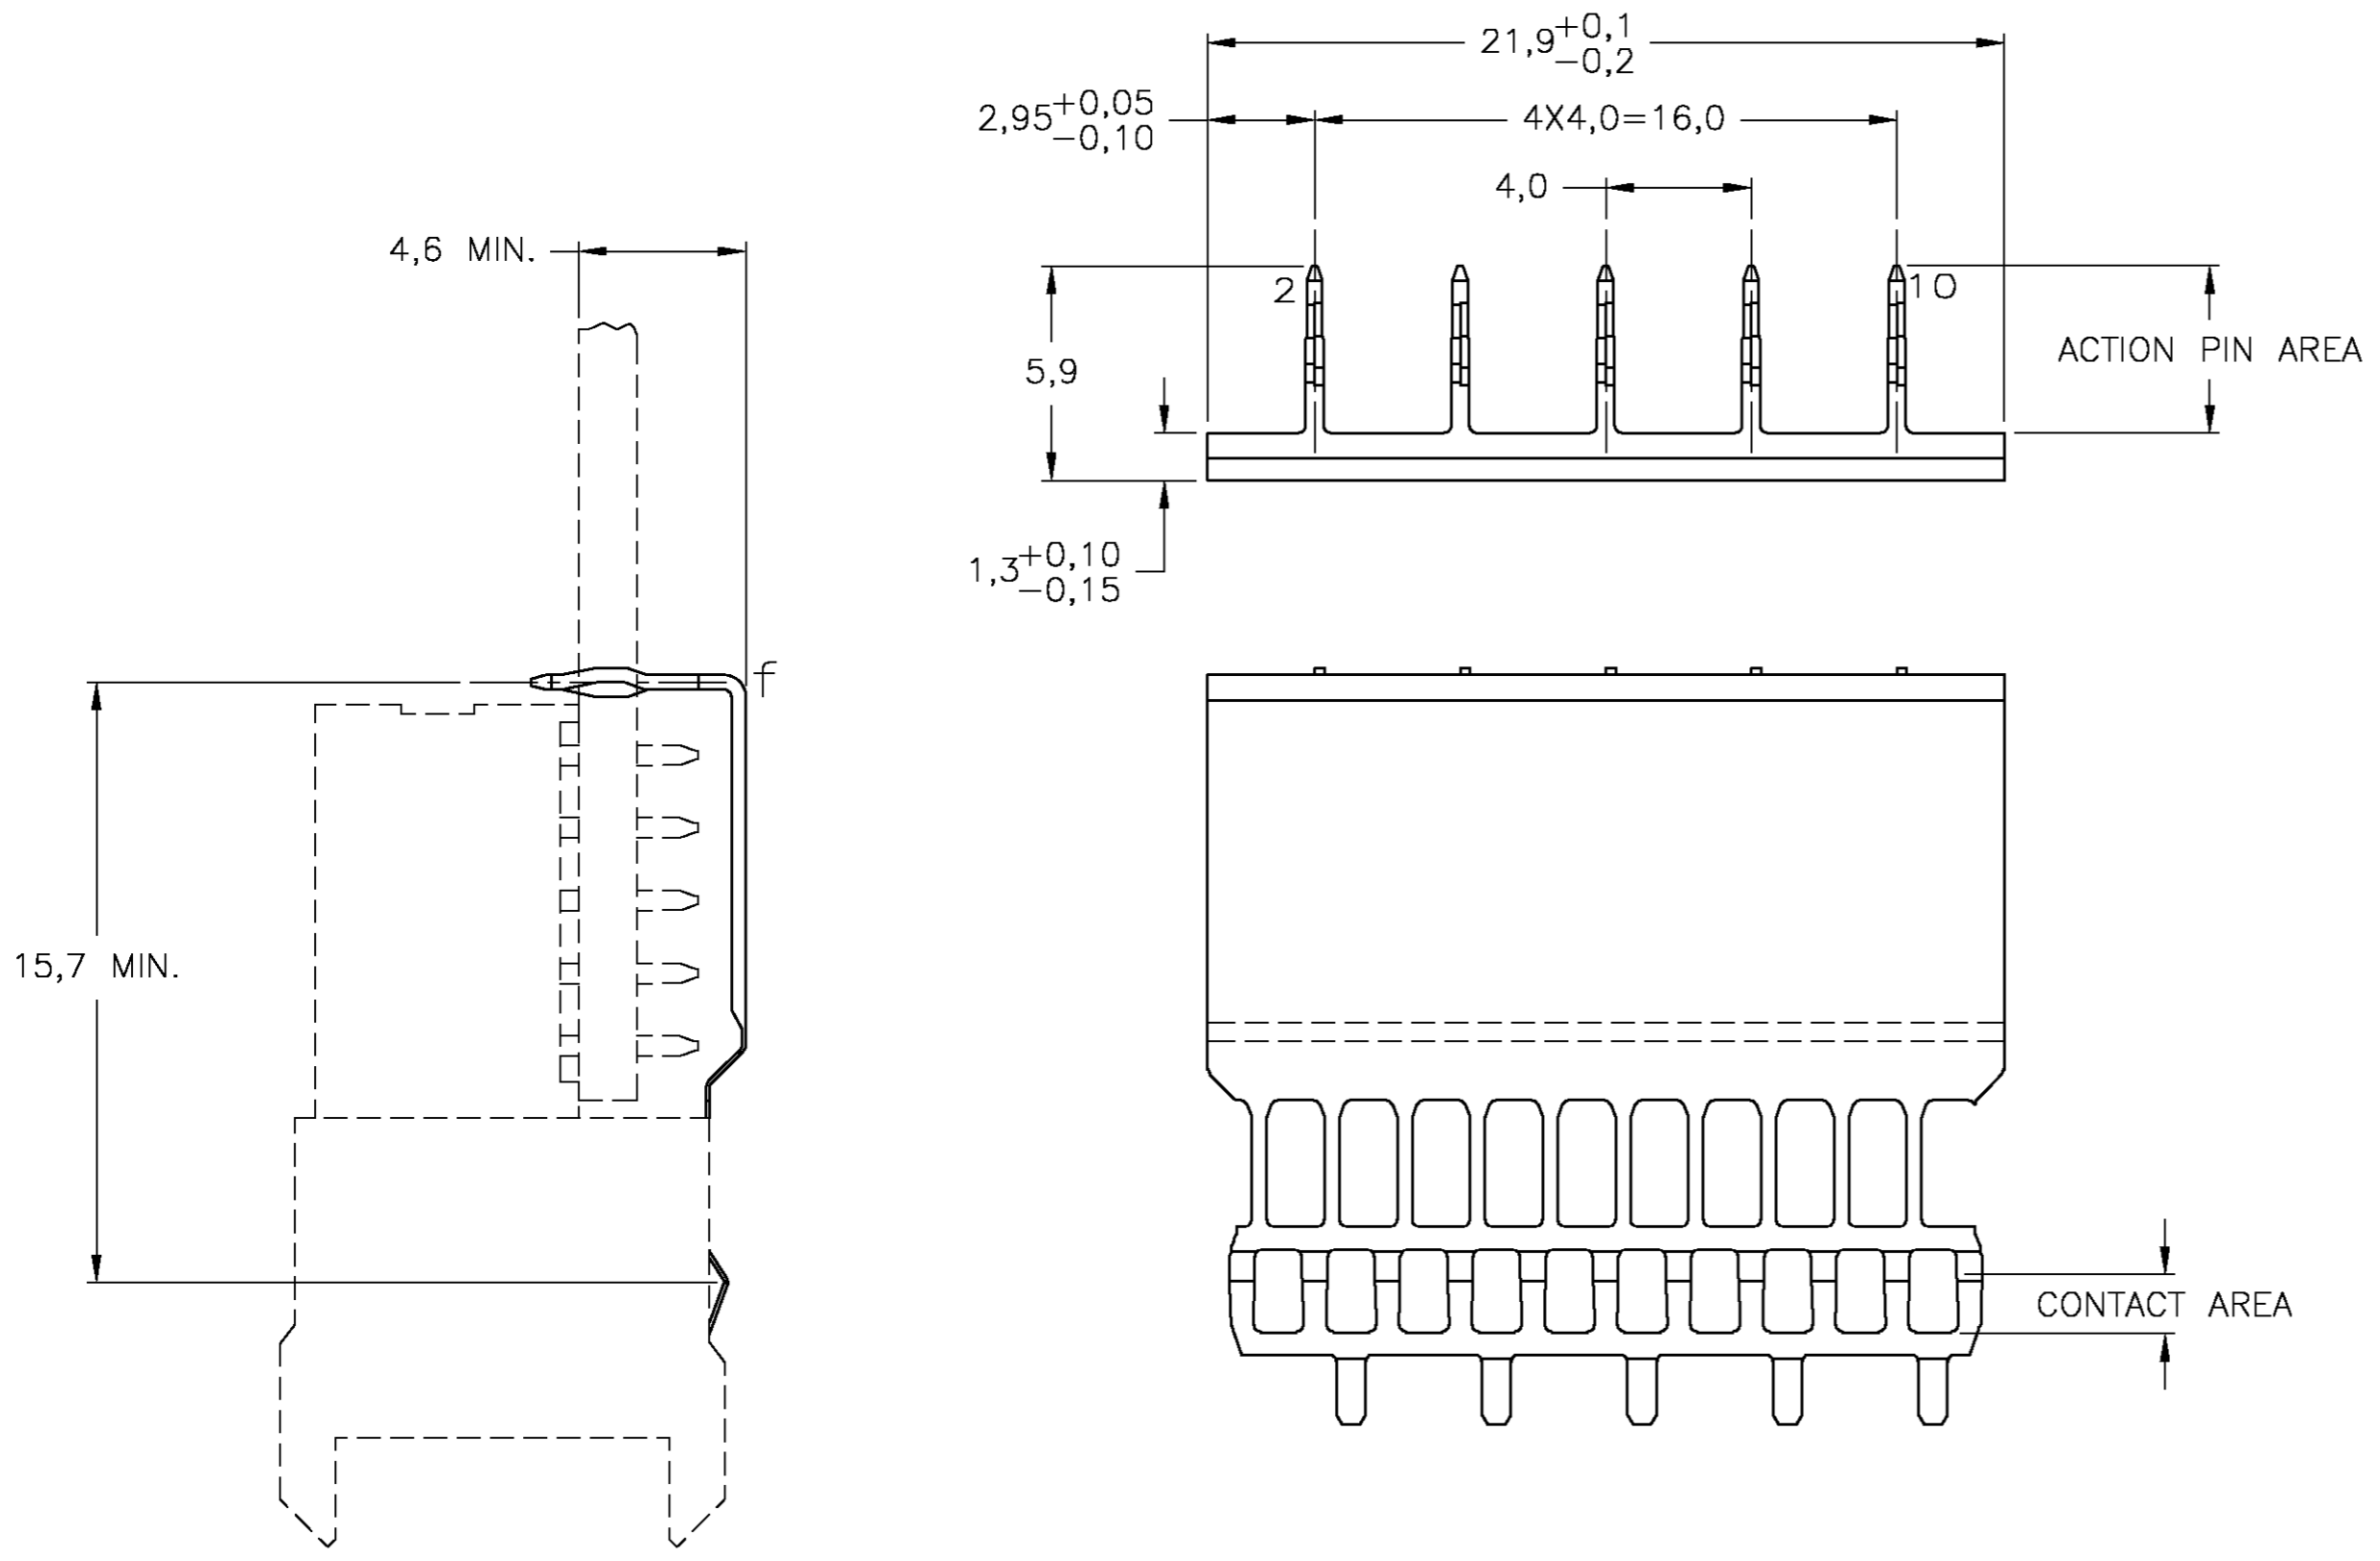

NOTES:

- ⚠ PLATING:
 CONTACT AREA: 0,76µm Au MIN. OVER 1,27µm Ni MIN.
 ACTION PIN : 0,5µm SnPb MIN.
 REMAINDER : Ni
 - ⚠ MATERIAL; PHOSPHORBRONZE.
 - ⚠ ROW "f" 5 PLATED THROUGH HOLES FOR LOWERSHIELD.
 - ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE C WITH
 UPPERSHIELD, 55+6 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
 5 MAX. BOARD THICKNESS 3,5 mm.
 - ⚠ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
- TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.

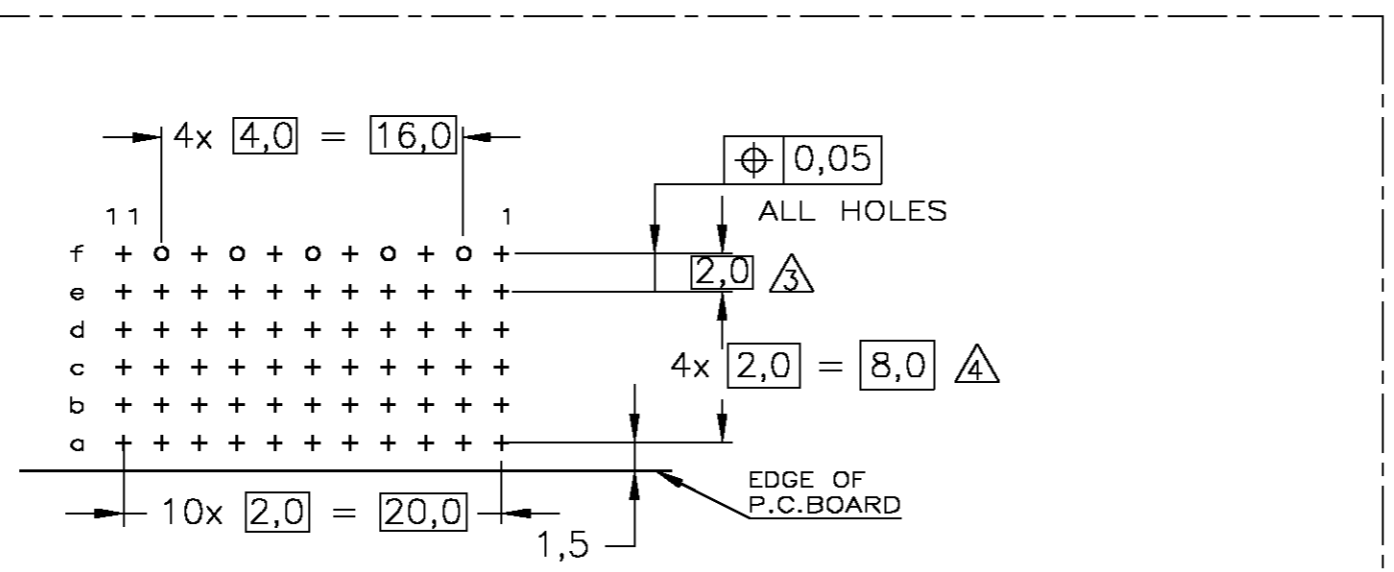

COMPONENT SIDE AS SHOWN
 RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
 FOR DETAILS SEE
 APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN 28-11-96	Tyco Electronics Corporation	
		CHK W. v.d.HEIJDEN 28-11-96	's-Hertogenbosch,5222AR-32	
DIMENSIONS: mm		APVD F. v.KONINGSBRUGGE	NAME Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE C/M	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-19082	RESTRICTED TO	
0 PLC ± -		APPLICATION SPEC 114-19029	SIZE A2	CAGE CODE 00779
1 PLC ± -		WEIGHT -	DRAWING NO C=352112	
2 PLC ± -		CUSTOMER DRAWING		
3 PLC ± -		SCALE 5:1		
4 PLC ± -		SHEET 1 OF 1		
ANGLES ± -		REV F		
FINISH -				