

# Right Angle Female



## Series 7200 – Style B 25, 125 Contacts





- 125 signal contacts in 5 rows of 25 positions
- Daughter card applications
- Designed for gas tight press-fit installations
- Available with or without upper shield
- This connector should be used in conjunction with a Type A or AB style, to ensure proper mating alignment
- Reduced crosstalk version available (see page 17)
- Lower ground return shield available (see page 17)



**DIMENSIONS: millimeters (inches)**

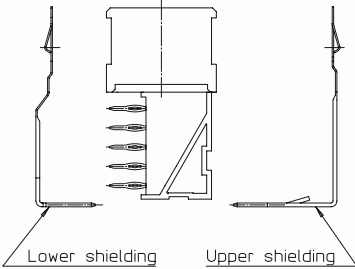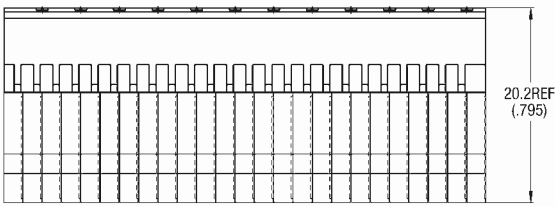






**LAYOUT**

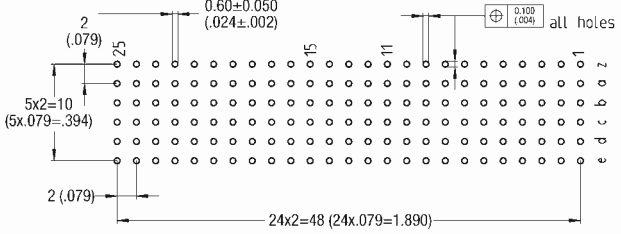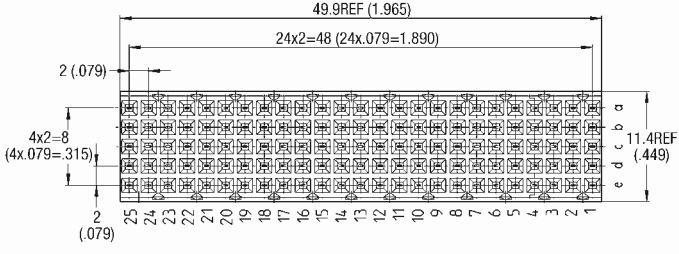

# Right Angle Female

## Style B 25 – 125 Contacts



Shielding Version	Cavity	Performance Class	Part Number
<b>Without Shield</b> 	125	2	27 7200 125 100 002
<b>Reduced Crosstalk</b> 	125	2	27 7200 125 101 002
<b>Upper Shield</b> 	125	2	27 7200 125 102 002
<b>Upper Shield and Reduced Crosstalk</b> 	125	2	27 7200 125 103 002
<b>Lower Shield</b> 		2	67 7200 2653 00 675

Technical description and dimensions see page 9 and 16