


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
BD	0	AA1	REVISED PER ECO-06-5544	3/13/06	SS	GS	

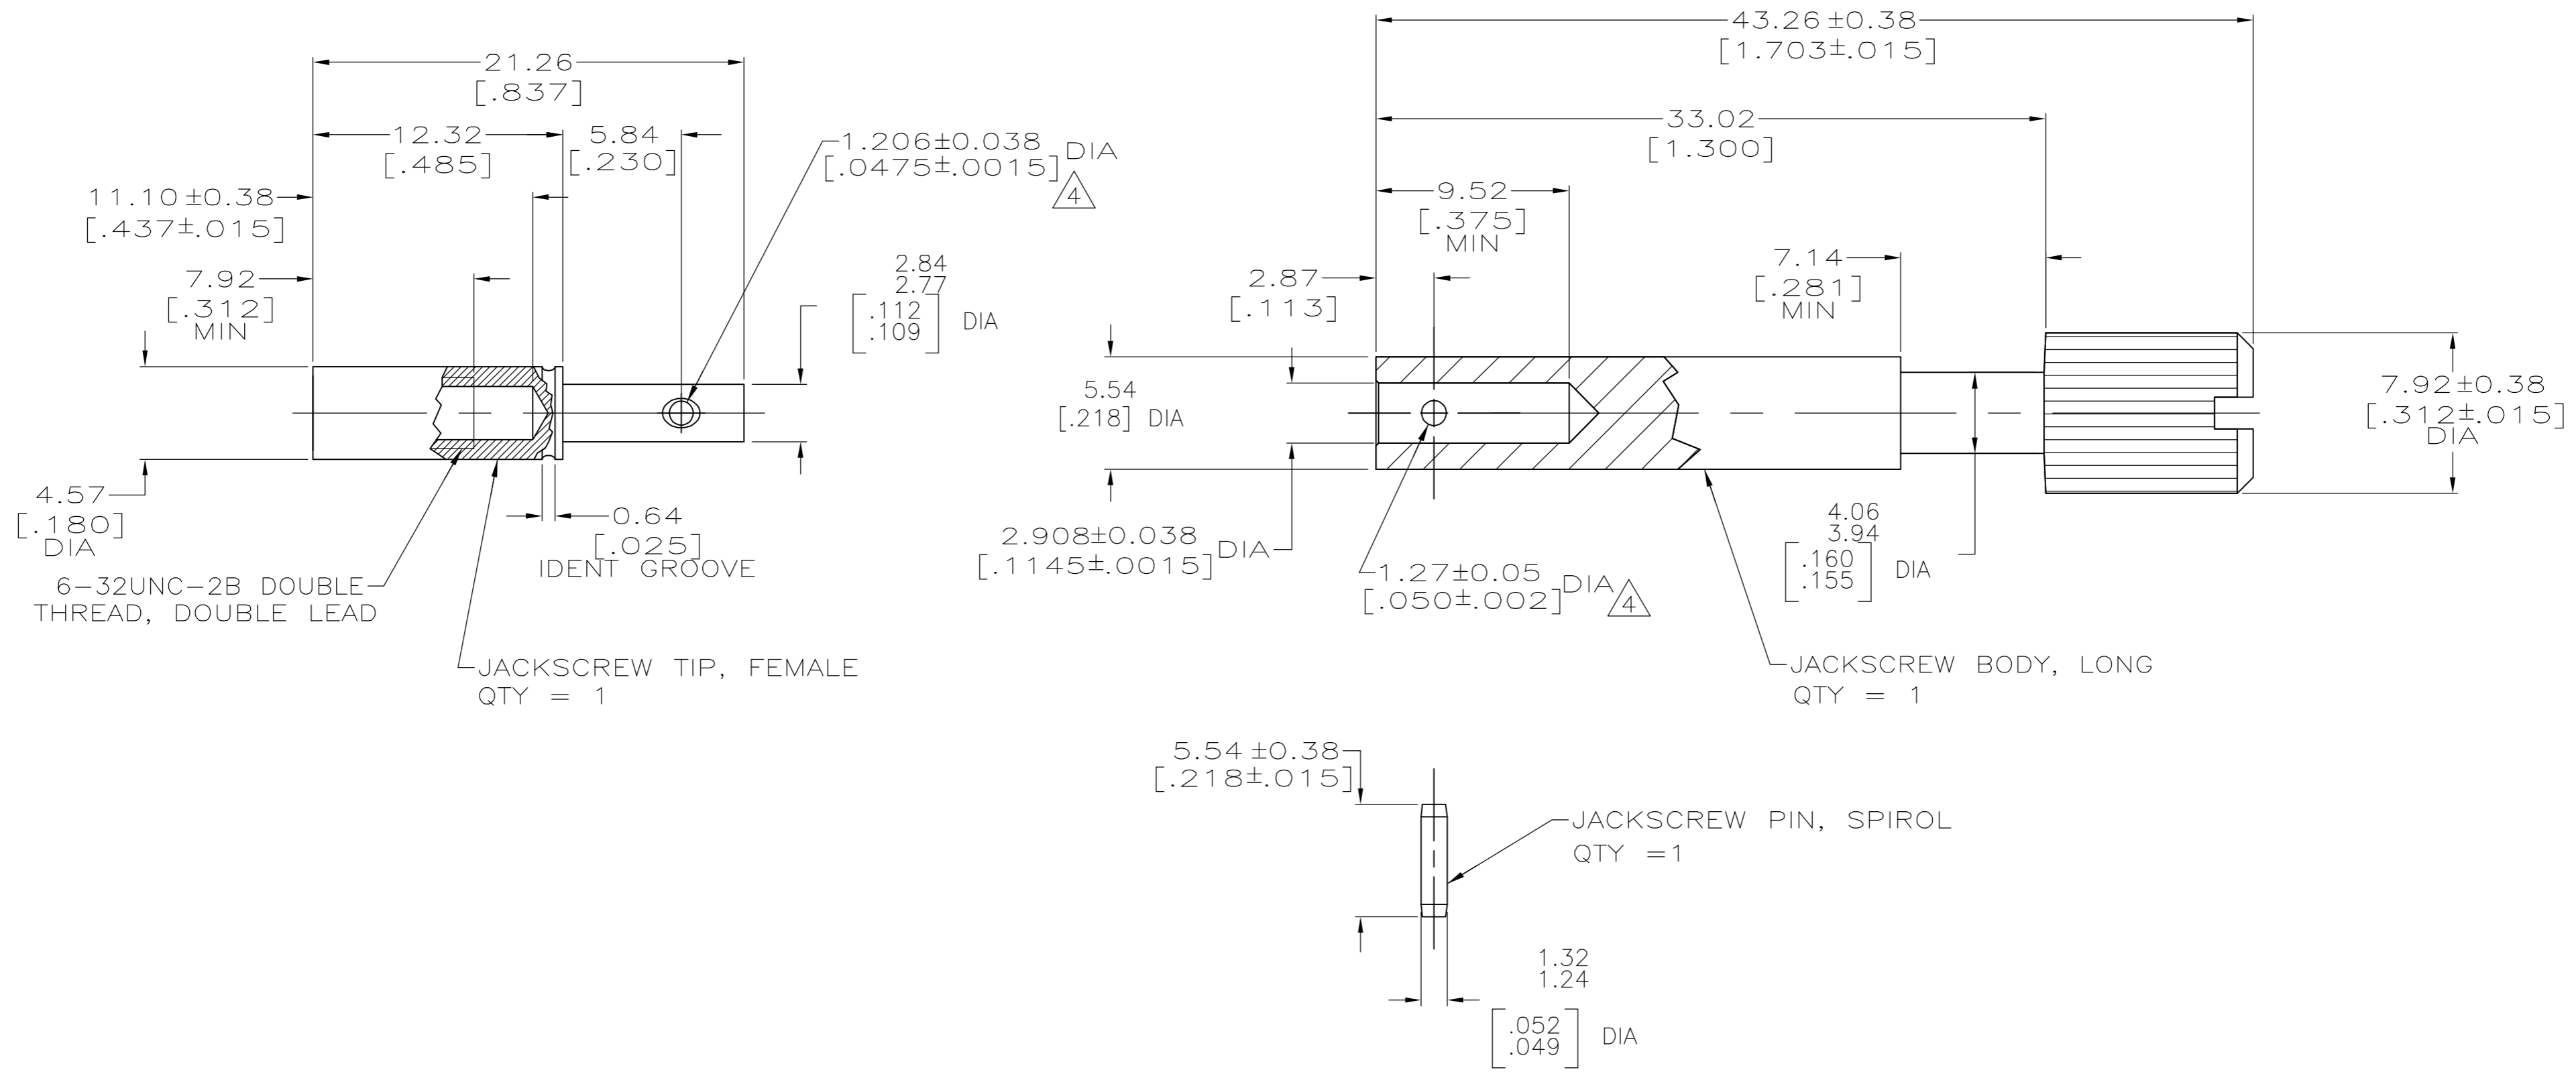

- ① ZINC.
- ② STAINLESS STEEL.
- 3. TO ASSEMBLE JACKSCREW REFER TO INSTRUCTION SHEET #1189.
- ④ HOLE CENTRALLY LOCATED WITHIN ±.007 [.003] OF THE 5.54 [.218] DIA AND THE 2.77/2.84 [.109/.112] DIA CENTER LINES.
- ⑤ CHROMATE CONVERSION, CLEAR.
- ⑥ HEXAVALENT CHROMATE COATING ON JACKSCREW BODY.
- ⑦ NON-HEXAVALENT CHROMATE COATING ON JACKSCREW BODY.

⑦	1-200867-1
⑥	200867-1
NOTES	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	K.FOLTZ	05/19/94	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: mm		CHK	R.STONE	06/16/94				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	-	-	JACKSCREW KIT, UNASSEMBLED, FEMALE, M SERIES			
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	-	-				
MATERIAL: JACKSCREW BODY: ④		APPLICATION SPEC	-	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
JACKSCREW TIP: ④		WEIGHT	-	-	A2	00779	C=200867	-
JACKSCREW PIN: ④		CUSTOMER DRAWING		SCALE	4:1	SHEET	1 OF 1	REV
								AA1