


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS					
BD		0		P	LTR	DESCRIPTION	DATE	DWN	APVD
				AB1		REVISED PER ECO-06-5544	3/13/06	SS	GS

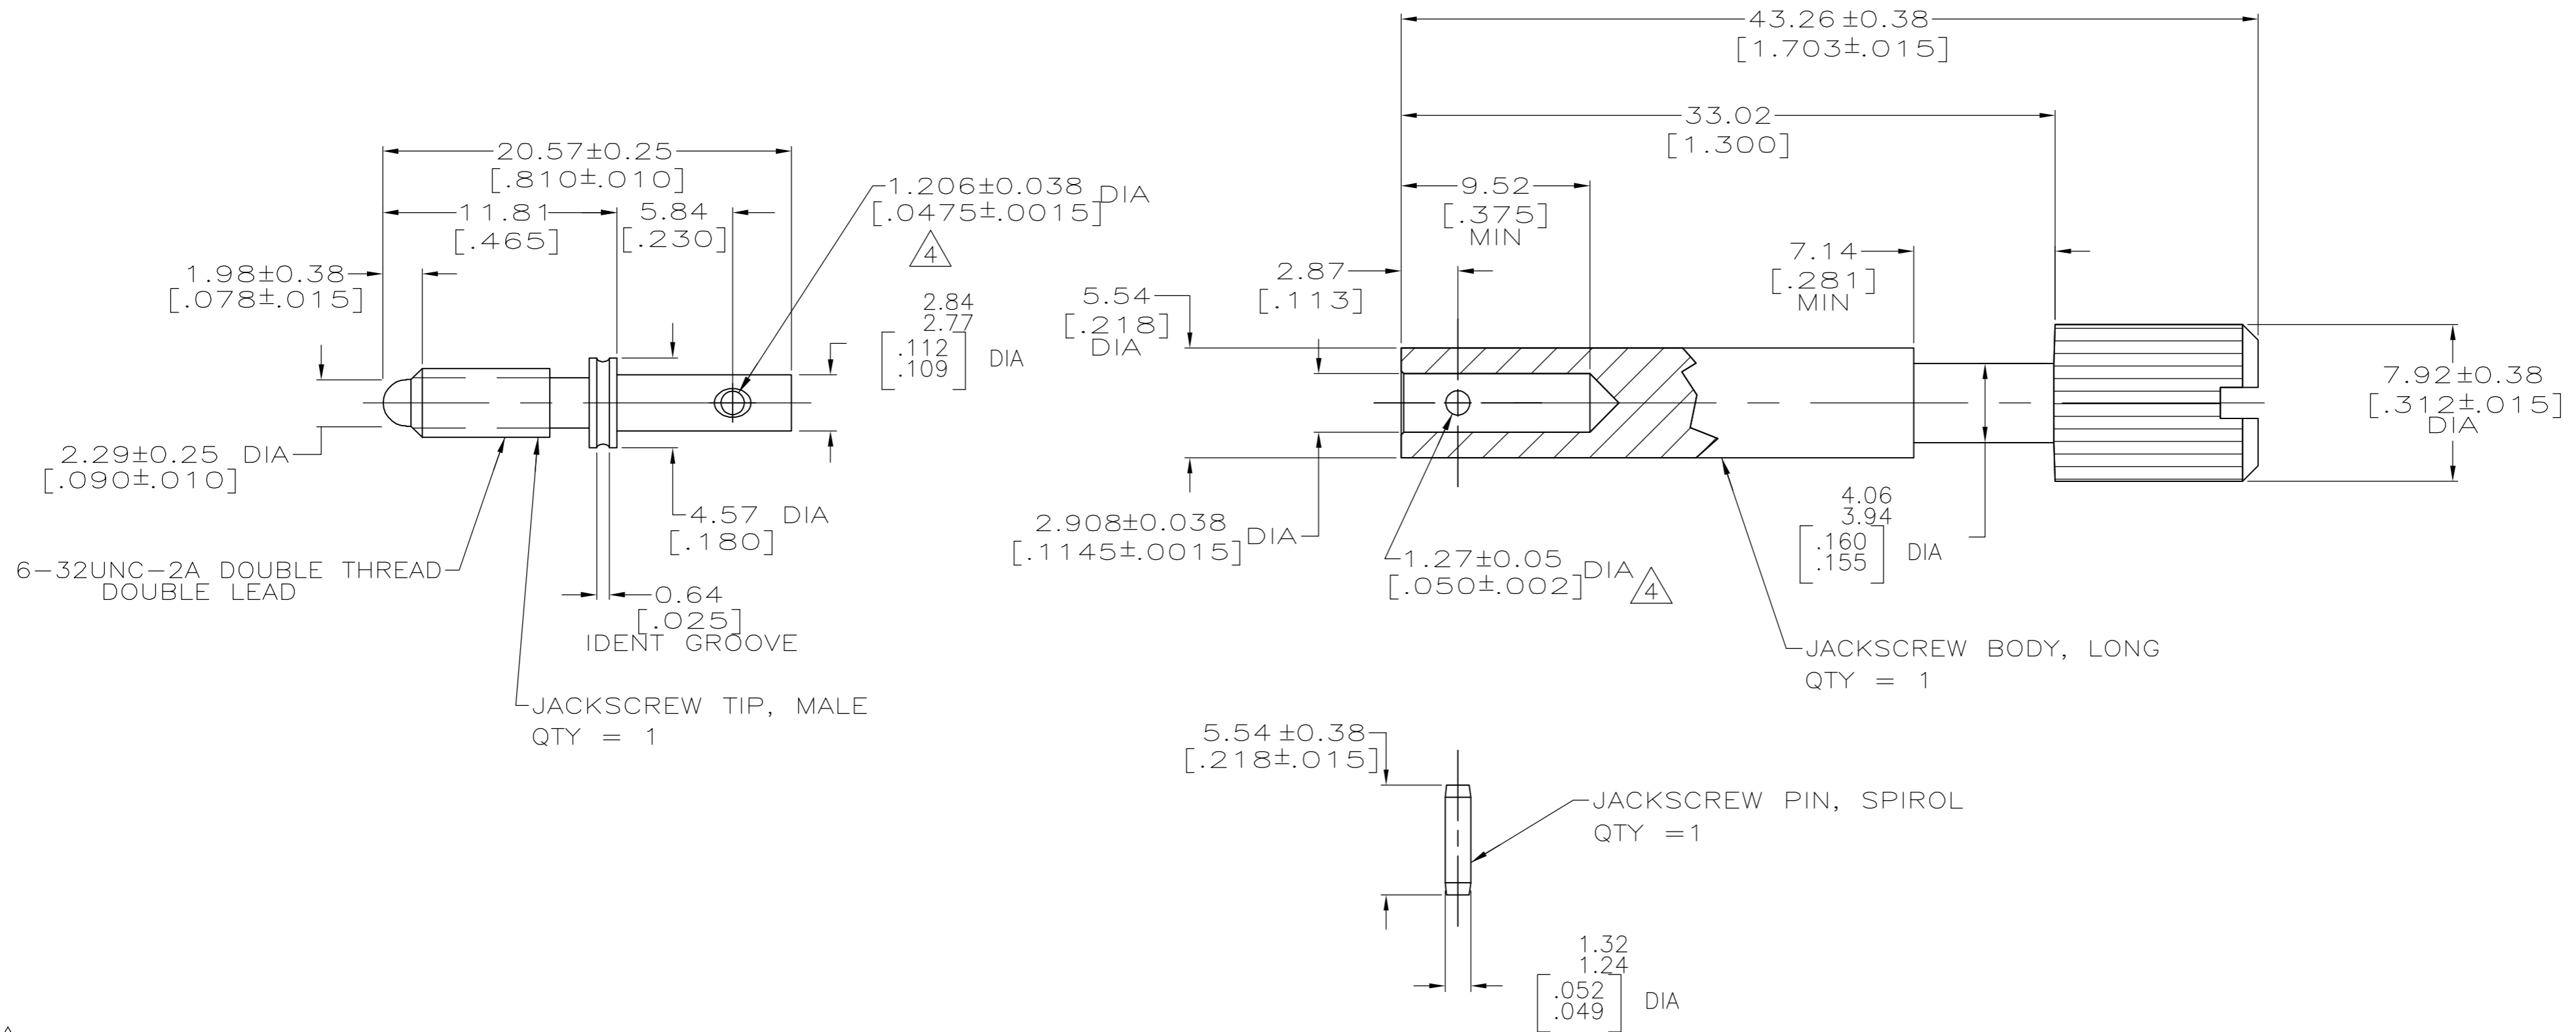

- ① ZINC.
- ② STAINLESS STEEL.
- 3. TO ASSEMBLE JACKSCREW REFER TO INSTRUCTION SHEET #1189.
- ④ HOLE CENTRALLY LOCATED WITHIN ± 0.07 [.003] OF THE 5.54 [.218] DIA AND THE 2.77/2.84 [.109/.112] DIA CENTER LINES.
- ⑤ CHROMATE CONVERSION CLEAR.
- ⑥ HEXAVALENT CHROMATE COATING ON JACKSCREW BODY.
- ⑦ NON-HEXAVALENT CHROMATE COATING ON JACKSCREW BODY.

①	1-200871-0
⑥	200871-1
NOTES	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	K.FOLTZ	05/23/94	 Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS:		CHK	R.STONE	06/16/94	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	-	-	NAME
0 PLC	± -	PRODUCT SPEC	-	-	JACKSCREW KIT, UNASSEMBLED, MALE, M SERIES
1 PLC	± -	APPLICATION SPEC	-	-	SIZE
2 PLC	± 0.13 [.005]	WEIGHT	-	-	A2
3 PLC	± -	CUSTOMER DRAWING	-	-	CAGE CODE
4 PLC	± -	SCALE	4:1	-	00779
ANGLES	± -	SHEET	1 of 1	-	DRAWING NO
MATERIAL	FINISH	REV	AB1	-	C=200871
JACKSCREW BODY: ①	JACKSCREW BODY: ②	RESTRICTED TO			
JACKSCREW TIP: ①	JACKSCREW PIN: PASSIVATED	-			
JACKSCREW PIN: ①					