
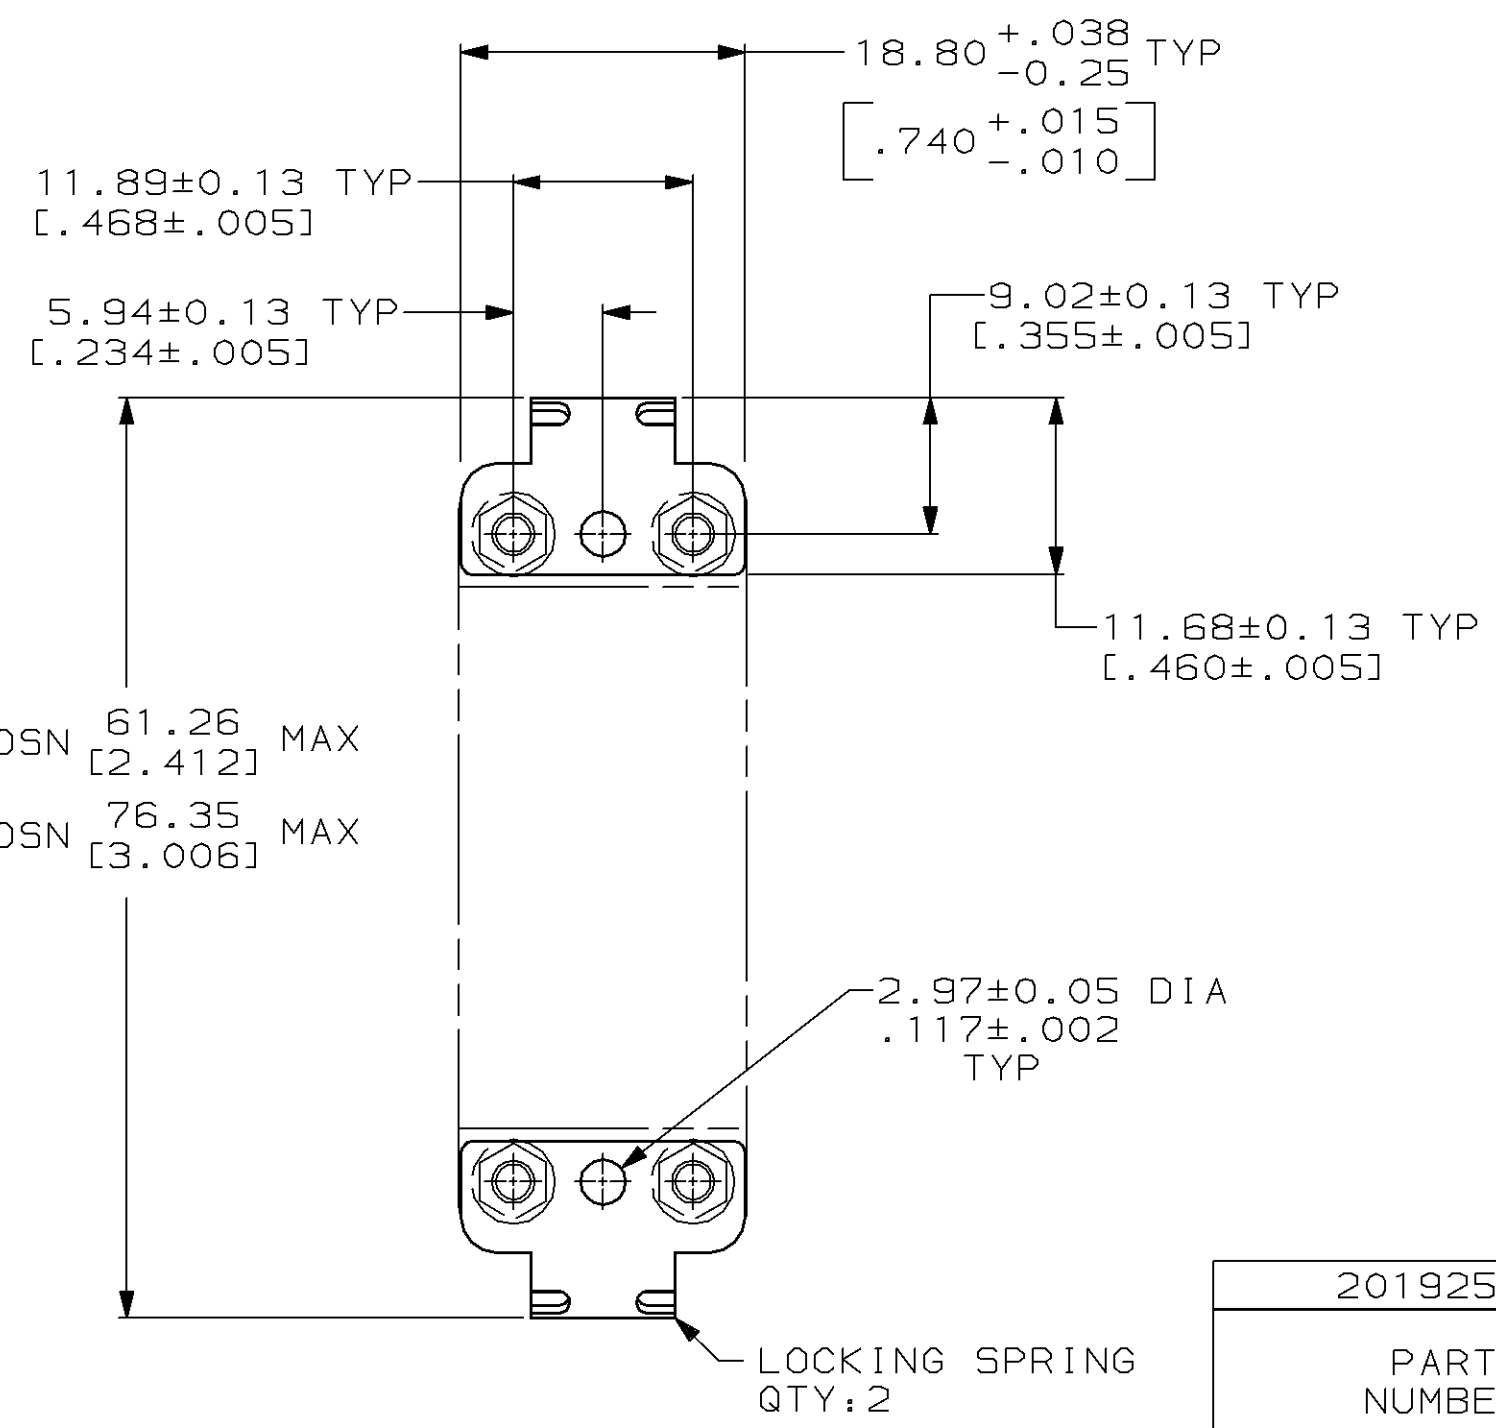


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
BD	36	H	REDRAWN WITHOUT CHANGE	21 SEP 95	-
			PER EC 0020-1084-95		

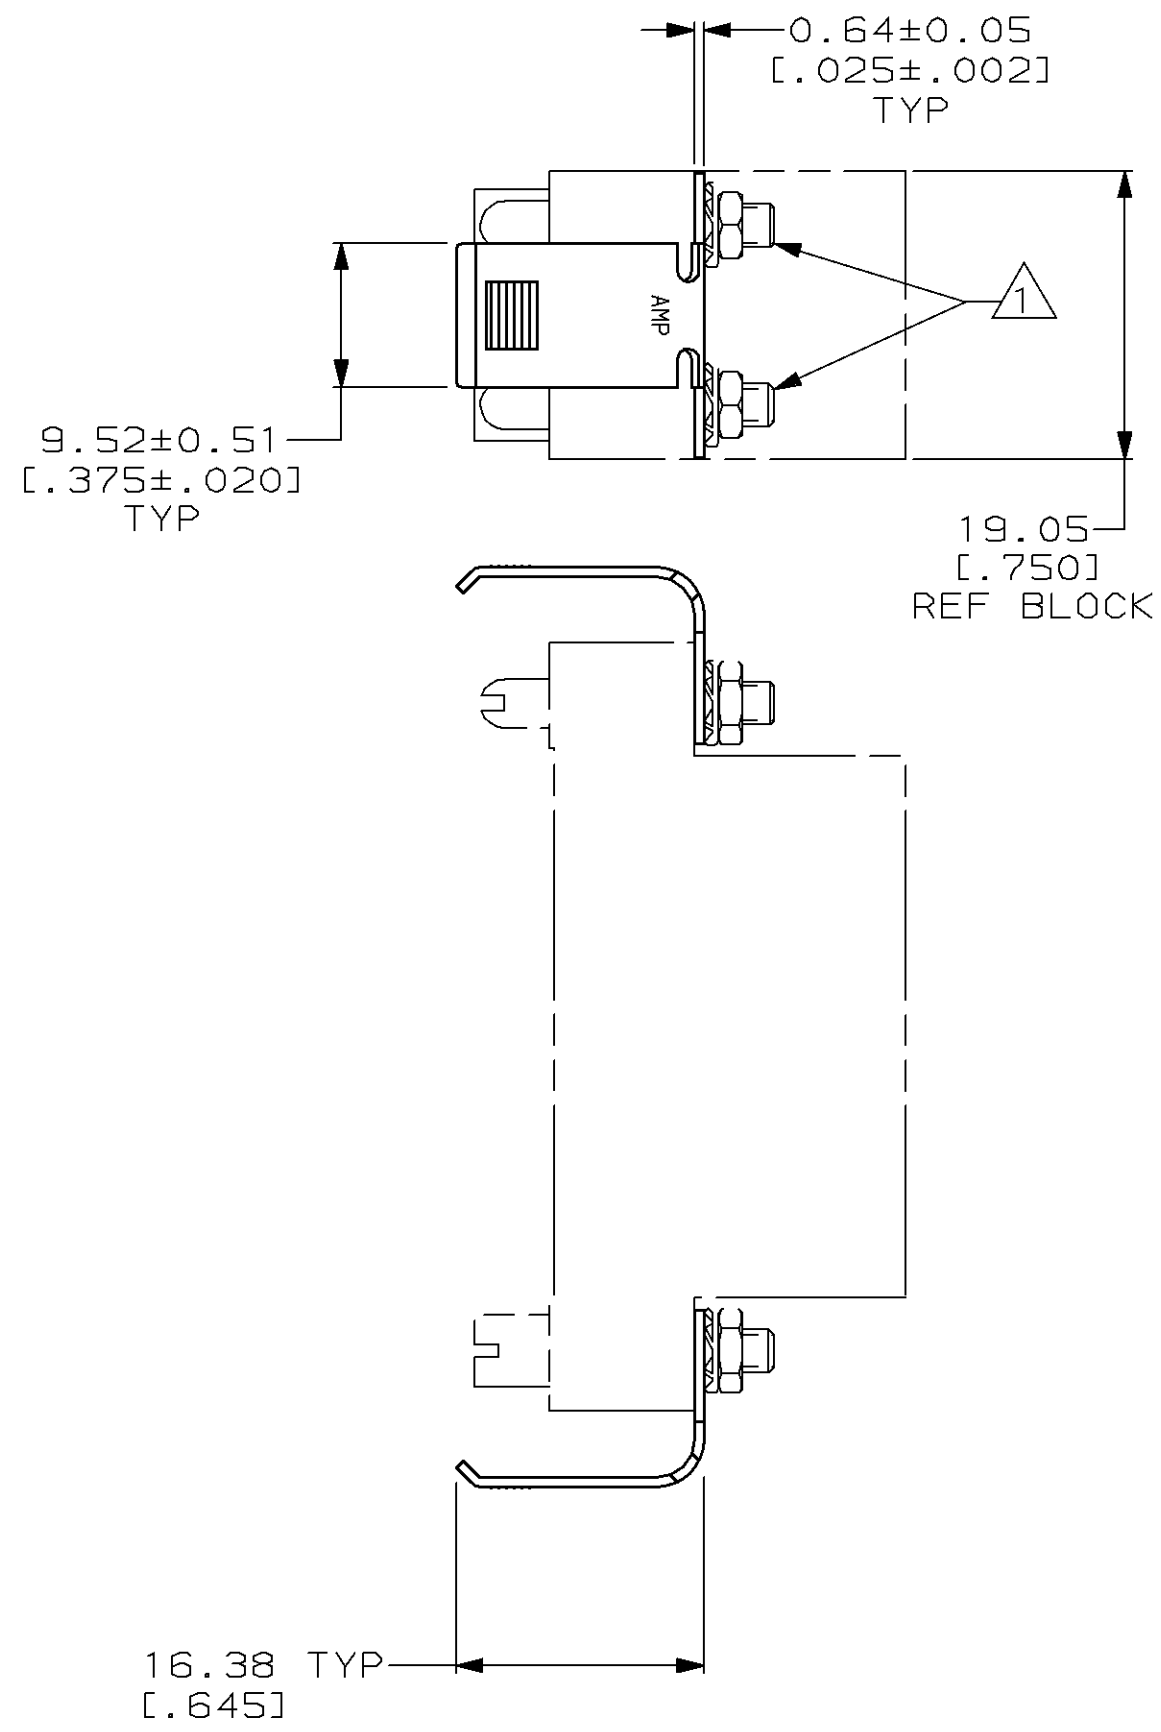

34 POSN 61.26 MAX  
 [2.412]  
 50 POSN 76.35 MAX  
 [3.006]

201925-1  
 PART NUMBER

1 SECURED WITH GUIDE PIN & OR SOCKET.  
 SEE INSTRUCTION SHEET NO 1409.  
 2. FOR MATING PART (SPRING CATCH), SEE 201926.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN D. HARDY 21 SEP 95	<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES]		CHK R. STONE 21 SEP 95	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. STEINHAUER 03 OCT 95	NAME LOCKING SPRING KIT, UNASSEMBLED, 34 & 50 POSN BLOCK, M SERIES
0 PLC ±- 1 PLC ±- 2 PLC ±0.38 [.015] 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC -	SIZE A3
MATERIAL CARBON STEEL		FINISH NICKEL PLATED	CAGE CODE 00779
		WEIGHT -	DRAWING NO C-201925
		CUSTOMER DRAWING	SCALE 2:1
			SHEET 1 OF 1
			REV H