

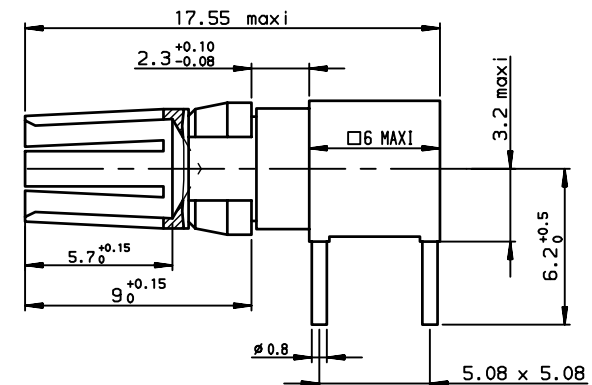


PART NUMBER
8609-M41-21-CXLF

PART NUMBER
8609-F41-21-CXLF

PLATING	THICKNESS
C0	NICKEL (all area)
C1	0.8μ AU (mating area)
C4	1.5μ AU (mating area)

PLATING	THICKNESS
C0	NICKEL (all area)
C1	0.8μ AU (mating area)
C4	1.5μ AU (mating area)

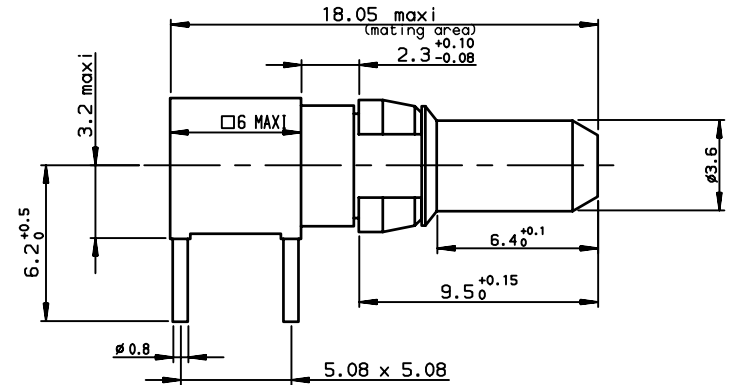

TECHNICAL CHARACTERISTICS:

- INSERTION / WITHDRAWAL FORCE : < 10 N
- CONTACT RESISTANCE : < 1 mΩ under 10 A
- CURRENT RATING : 10 A at 20°C

OTHER CHARACTERISTICS: SEE INSERTS ACCORDING TO DIN 41626

NOTE: ROHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in 65-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see 65-14-920.

rev	ecn no	dr	date
A	LS06-0022	LEG	2006/03/11
B	LS06-0097	LGO	2006/07/26
C	LS08-0160	LGO	2008/07/10
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	H.LEGALLIC	2006/03/11	ANGULAR	0.X ±0.1
Eng	H.LEGALLIC	2006/03/11	LINEAR	0.XX ±0.1
Chr	LEGARRE	2006/03/11	0.XX' ±2'	0.XXX ±0.1
Appr	LEGARRE	2006/03/11	Product family	DIN 8609
			projection	mm
			size	A3
			Scale	5
			ECN	LS08-0160
			Spec ref	-
			MALE AND FEMALE POWER CONTACTS RIGHT ANGLE PCB MOUNT	
catalog no			dwg no	C-8609-1209
			CUSTOMER	sheet 1 of 1

Copyright FCj.