
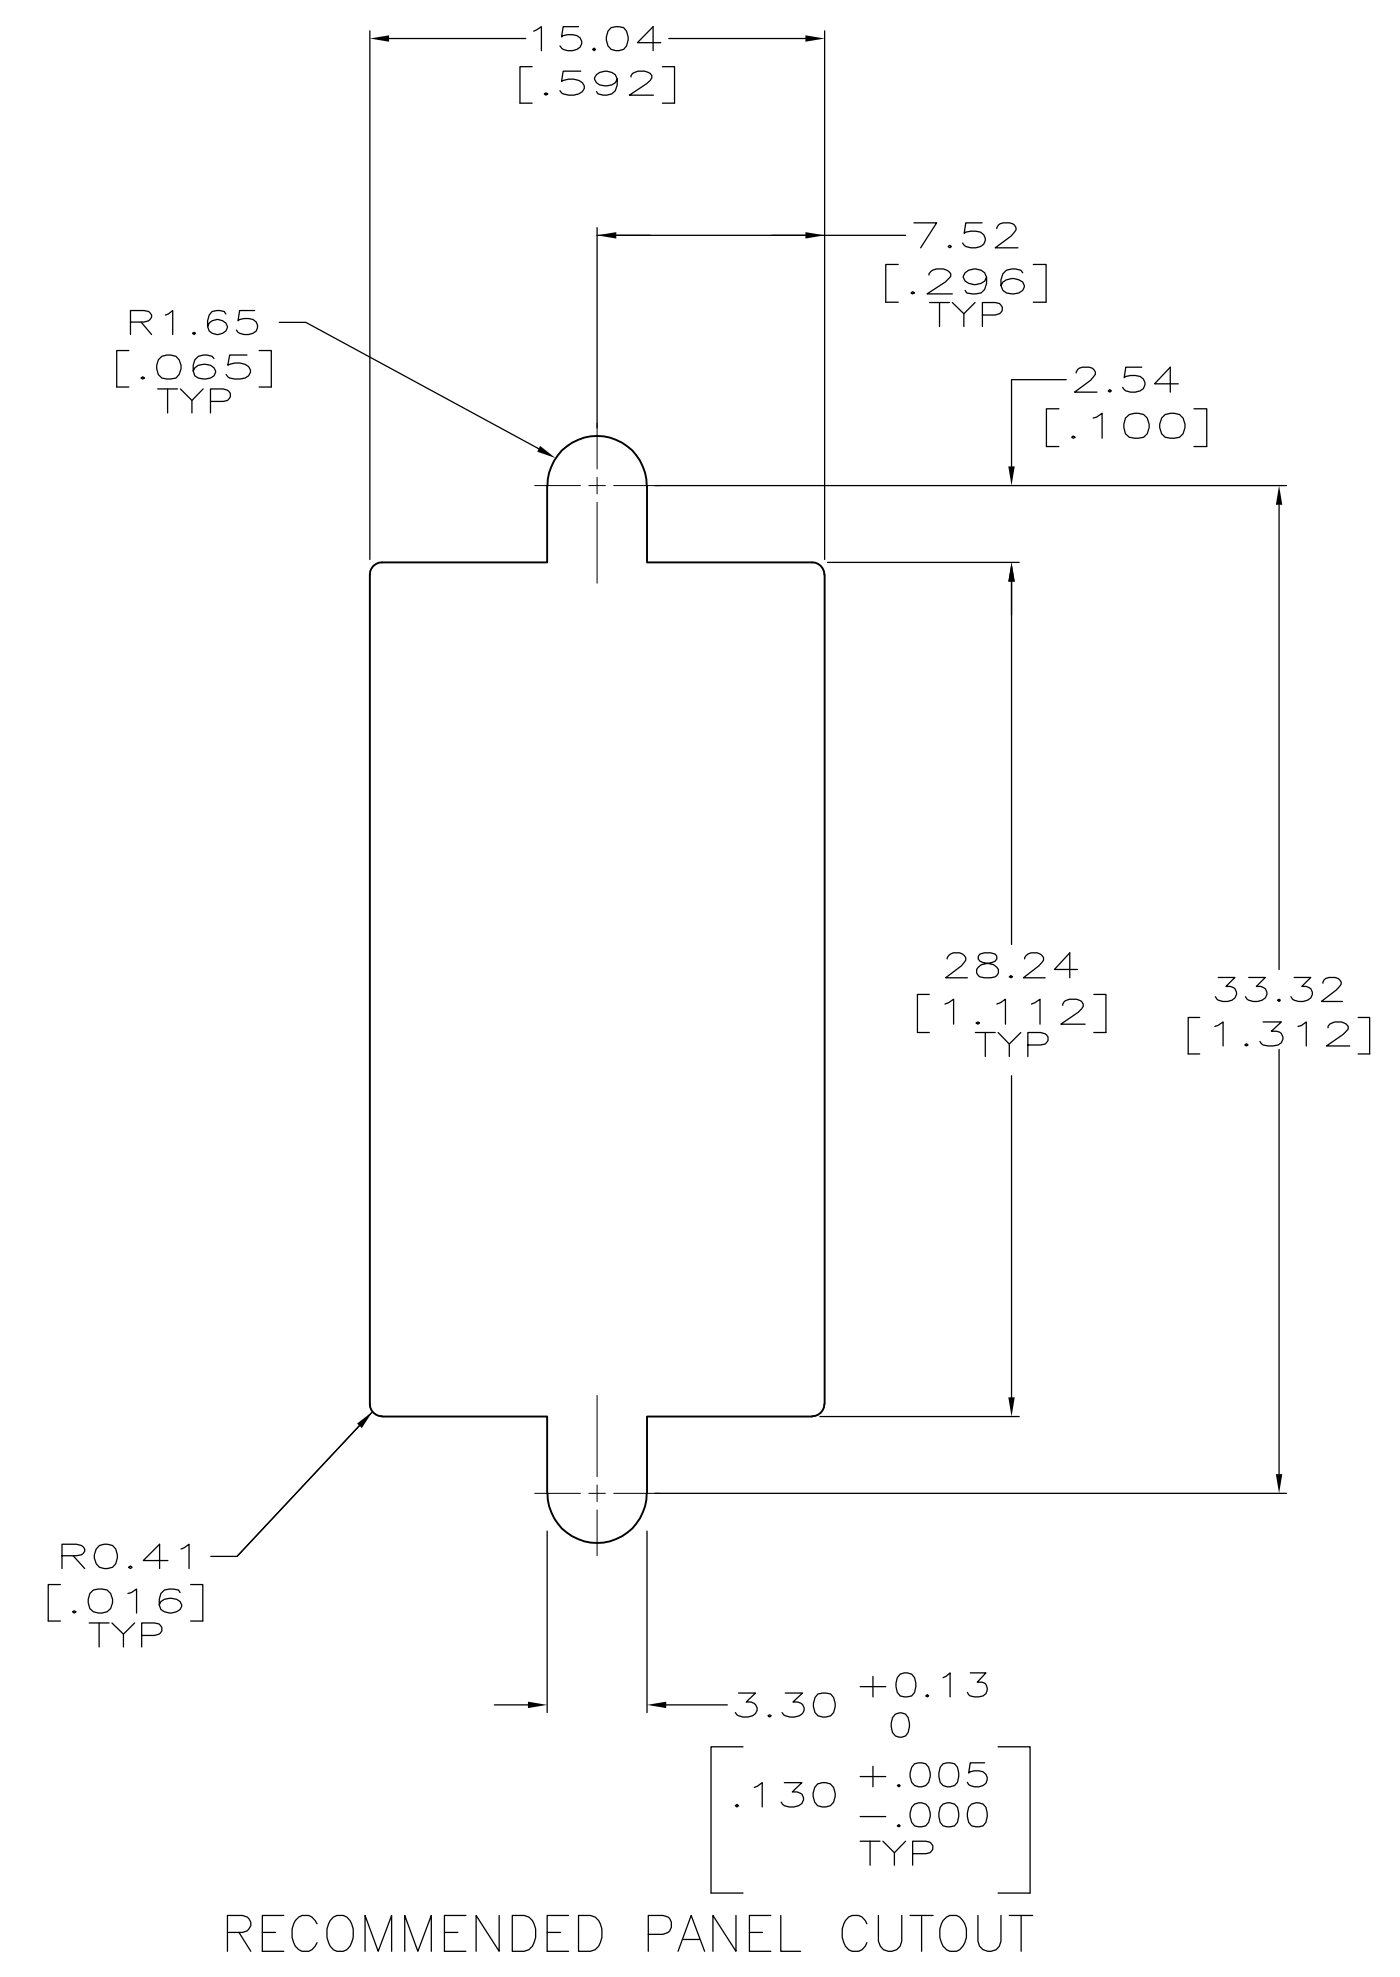


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DN	APVD	SS	GS
W		REVISED PER ECO-07-010240	5/3/07	SS	GS		

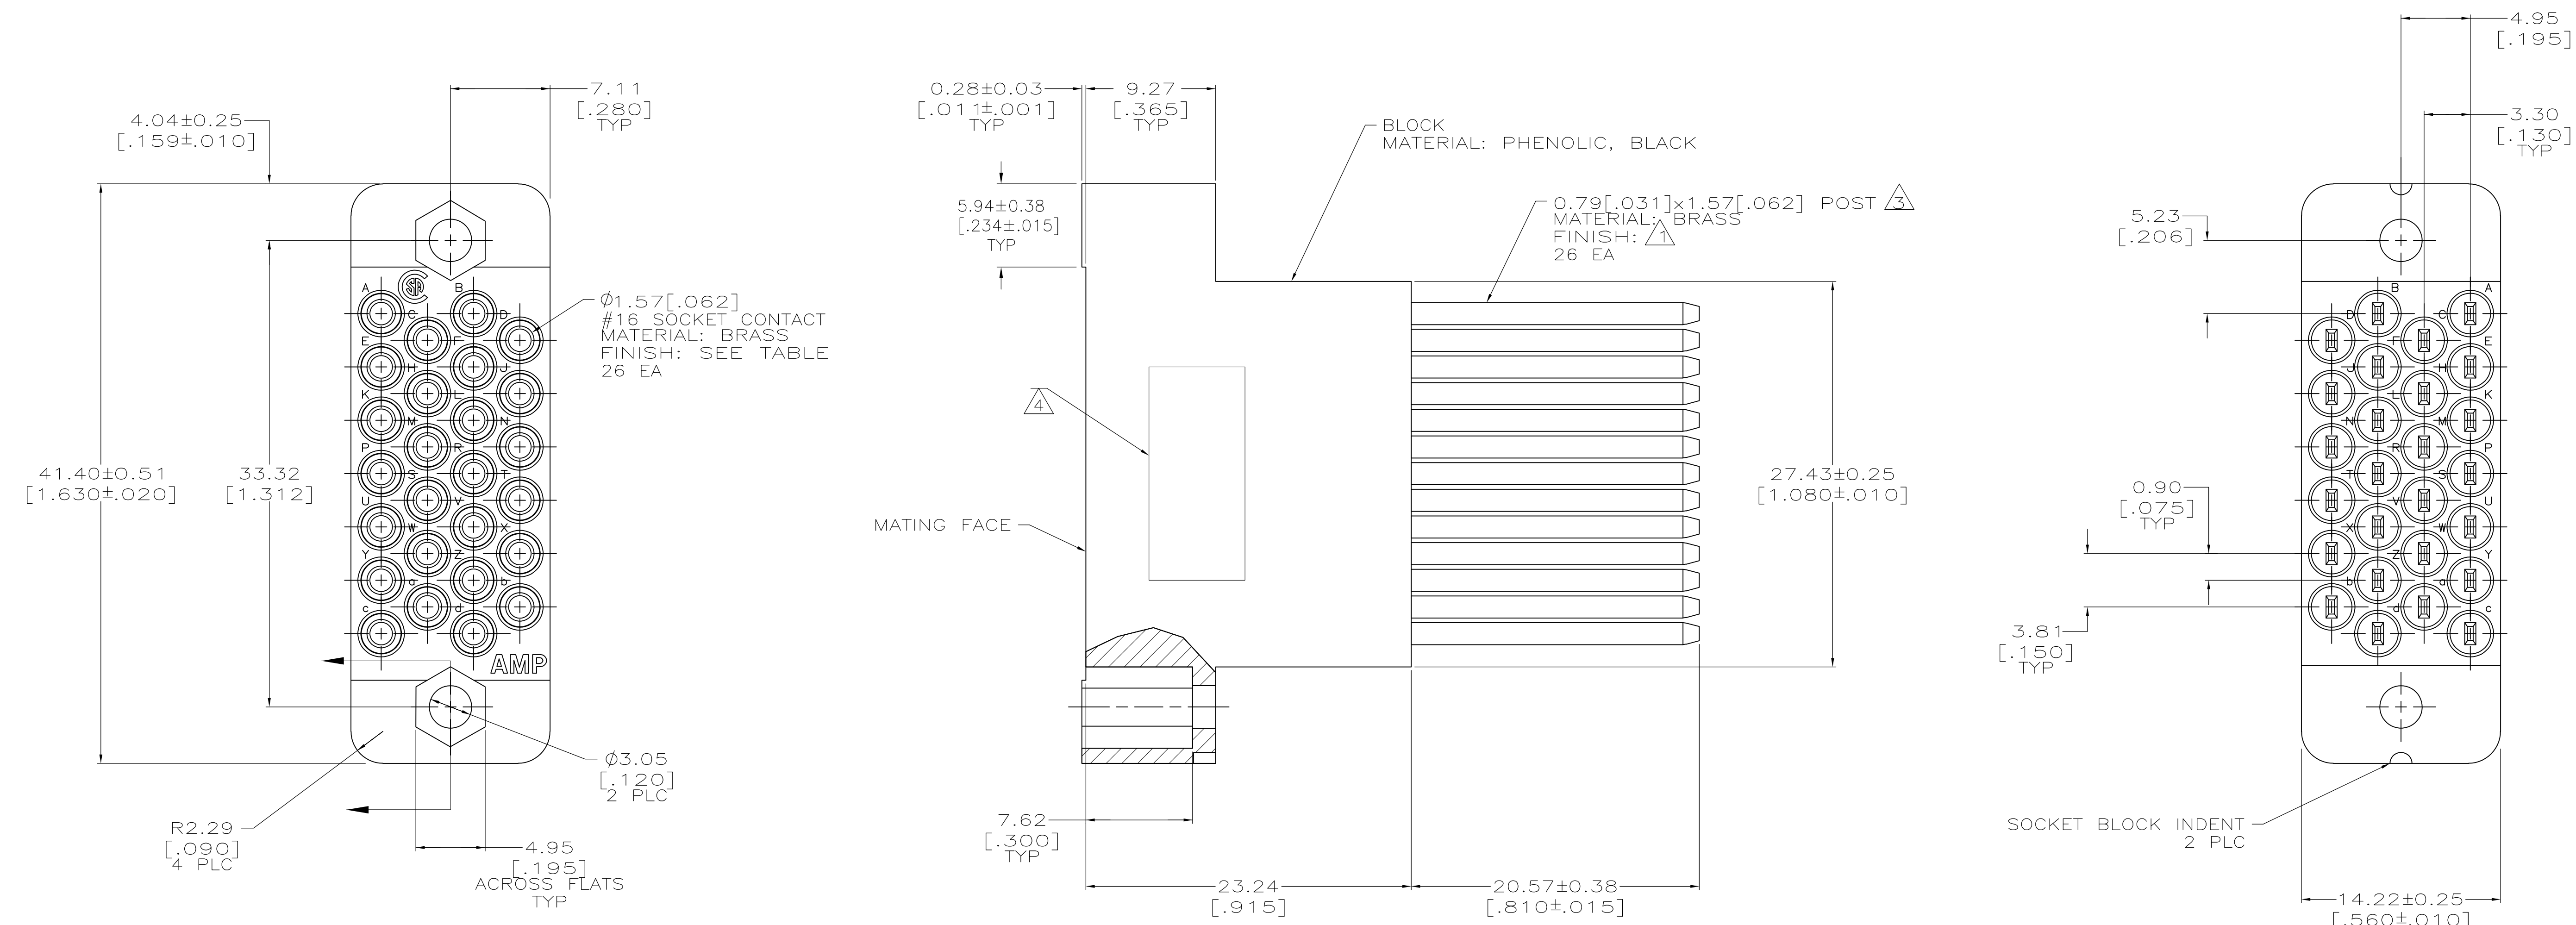

- ⚠ 2.54um[.000100] MIN TIN-LEAD OVER 1.27um[.000050] MIN NICKEL.
- ⚠ 0.76um[.000030] MIN GOLD, INTERNALLY, FOR A DISTANCE OF 5.08[.200] MIN FROM MATING END, GOLD FLASH ON THE REMAINDER, ALL OVER 0.76um[.000030] MIN NICKEL.
- ⚠ POSTS ARE SEMI AUTOMATICALLY WIREABLE AND WILL ACCOMODATE 3 TERMINATIONS.
- ⚠ AMP, PART NUMBER, AND DATE CODE MARKED IN THIS AREA.
- 5. #24 AWG MAX WIRE TO BE USED WITH THIS CONNECTOR.
- ⚠ 2.54um[.000100] MIN TIN OVER 1.27um[.000050] MIN NICKEL.

⚠	6-205511-2
⚠	1-205511-3
POST PLATING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DN C. REIFSNYDER 13 FEB 96	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: mm [INCHES]		CHK R. STONE 22 FEB 96	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D M. MCALONIS 22 FEB 96	NAME
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	SOCKET ASSY, 26 POSITION, AUTOWIREABLE, STANDARD, M SERIES
MATERIAL SEE CALLOUTS		FINISH SEE CALLOUTS	RESTRICTED TO
CUSTOMER DRAWING		WEIGHT	SIZE A1
SCALE 4:1		DRAWING NO 00779	CAGE CODE 205511
SHEET 1 of 1		REV W	