
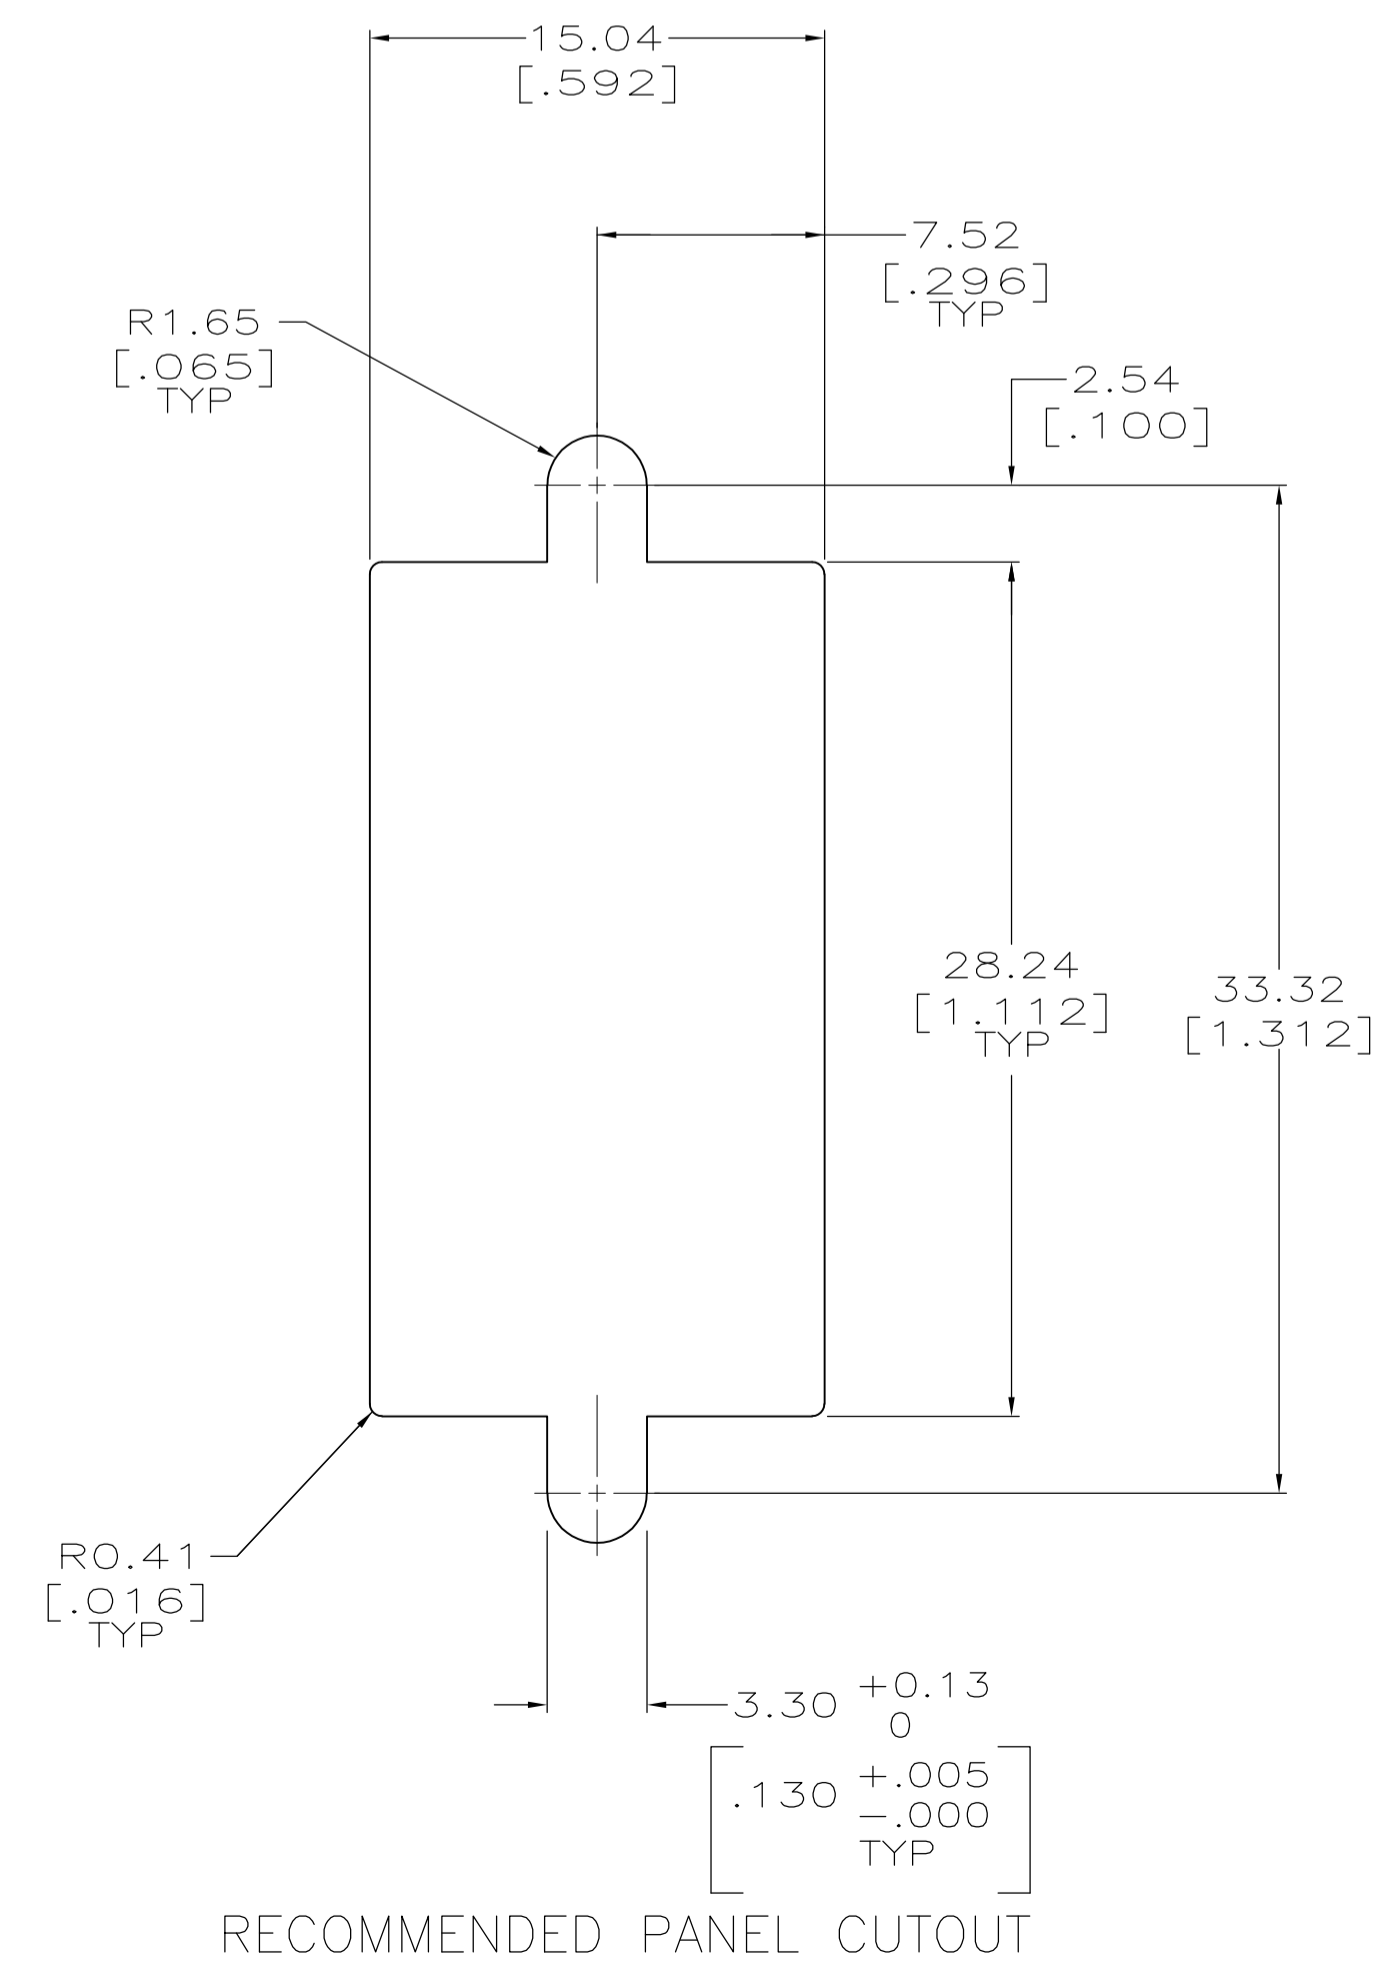


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DN	APVD	SS	GS
P		REVISED PER ECO-07-010234	5/2/07	SS	GS		

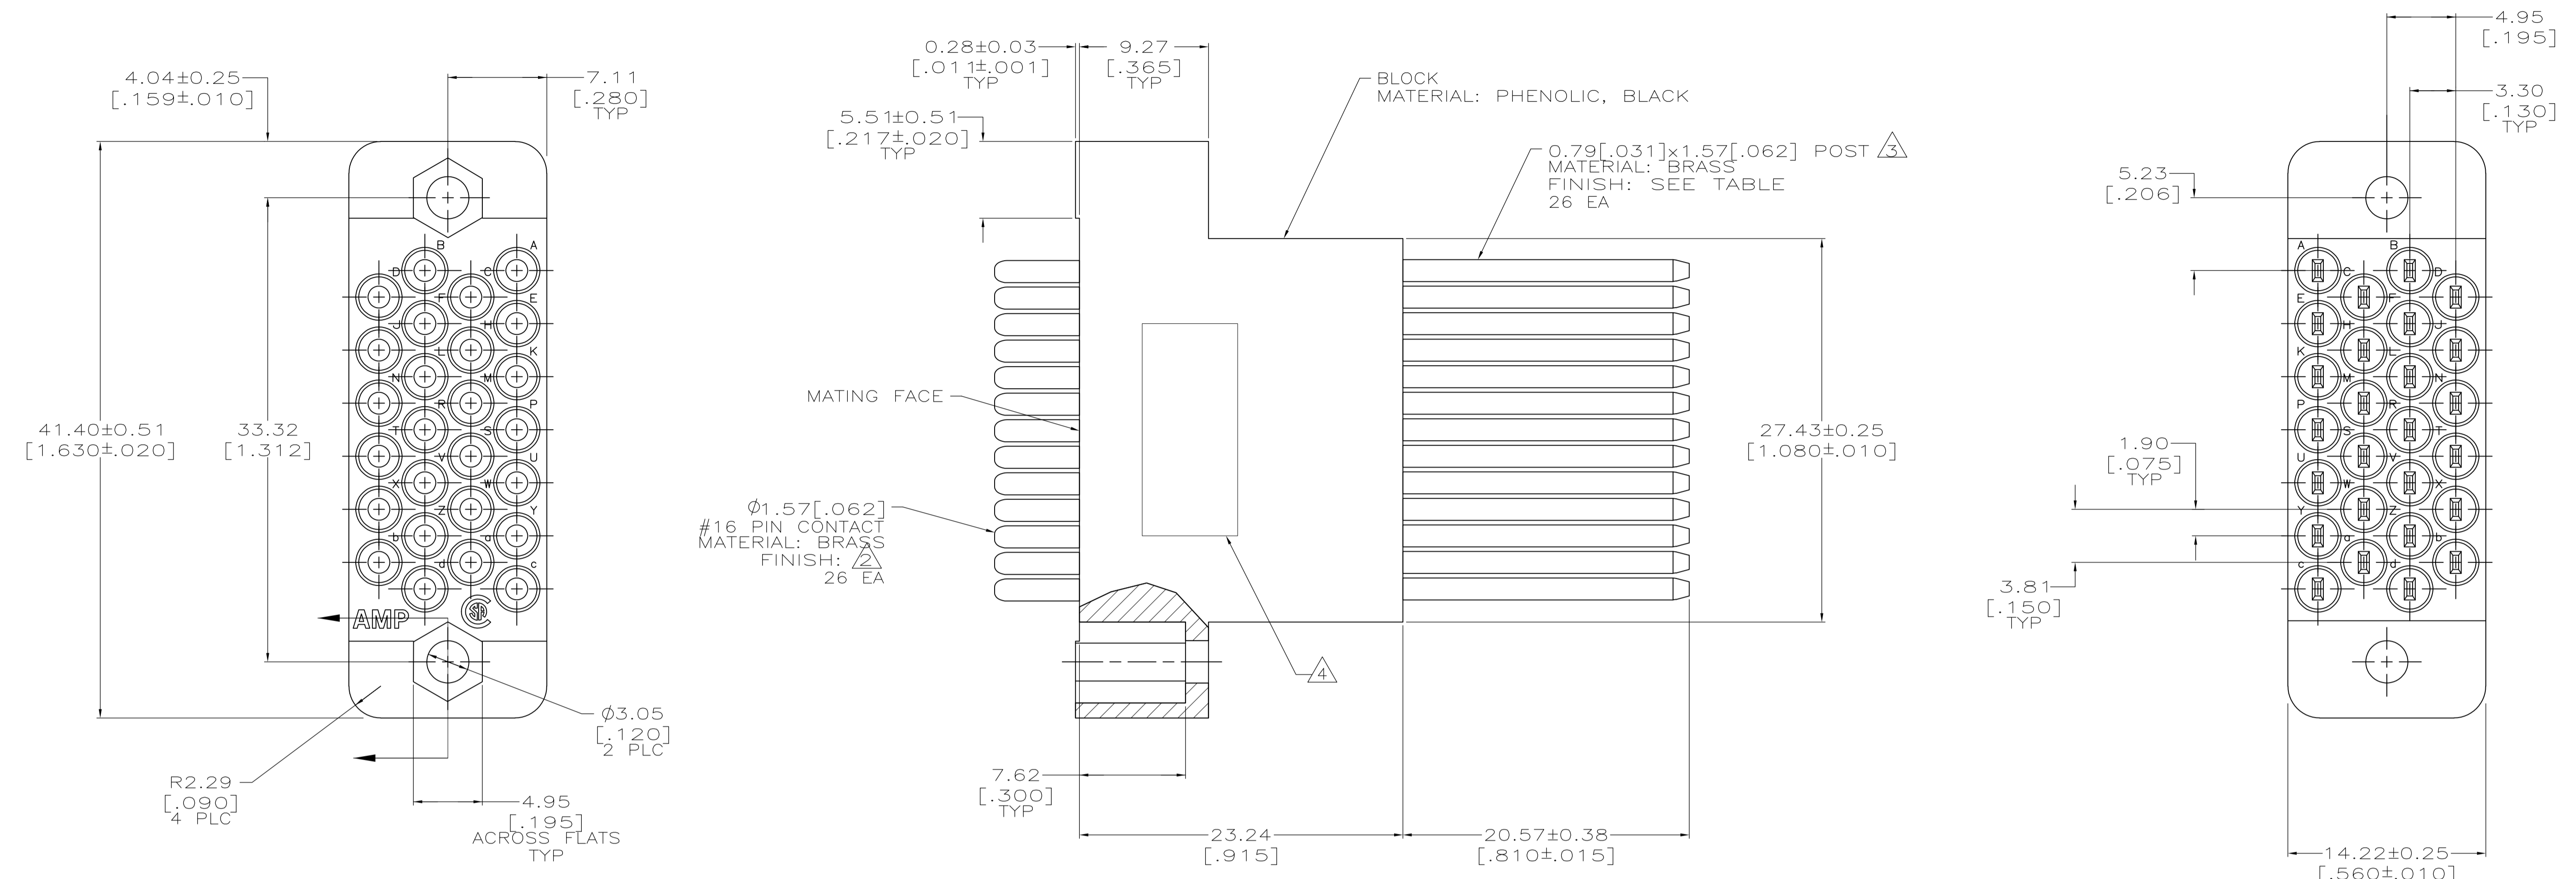

- ⚠ 2.54µm[.000100] MIN TIN-LEAD OVER 1.27µm[.000050] MIN NICKEL.
- ⚠ 0.76µm[.000030] MIN GOLD FOR A DISTANCE OF 5.08[.200] MIN FROM MATING END, GOLD FLASH ON THE REMAINDER, ALL OVER 1.27µm[.000050] MIN NICKEL.
- ⚠ POSTS ARE SEMI AUTOMATICALLY WIREABLE AND WILL ACCOMODATE 3 TERMINATIONS.
- ⚠ AMP, PART NUMBER, DATE CODE AND THE LETTER P MARKED IN THIS AREA.
- 5. #24 AWG MAX WIRE TO BE USED WITH THIS CONNECTOR.
- ⚠ 2.54µm[.000100] MIN TIN OVER 1.27µm[.000050] MIN NICKEL.

⚠	1-205512-7
⚠	1-205512-3
POST PLATING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN C. REIFSNYDER 14 FEB 96	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: mm [INCHES]		CHK R. STONE 22 FEB 96	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D M. MCALONIS 22 FEB 96	NAME
0 PLC ± -		PRODUCT SPEC	PIN ASSEMBLY, 26 POSITION AUTOWIREABLE, STANDARD M SERIES
1 PLC ± -		APPLICATION SPEC	
2 PLC ± 0.13 [.005]		SIZE	A1
3 PLC ± -		WEIGHT	00779
4 PLC ± -		CUSTOMER DRAWING	205512
ANGLES ± -		SCALE	4:1
MATERIAL SEE CALLOUTS	FINISH SEE CALLOUTS	RESTRICTED TO	1 OF 1
			REV P