

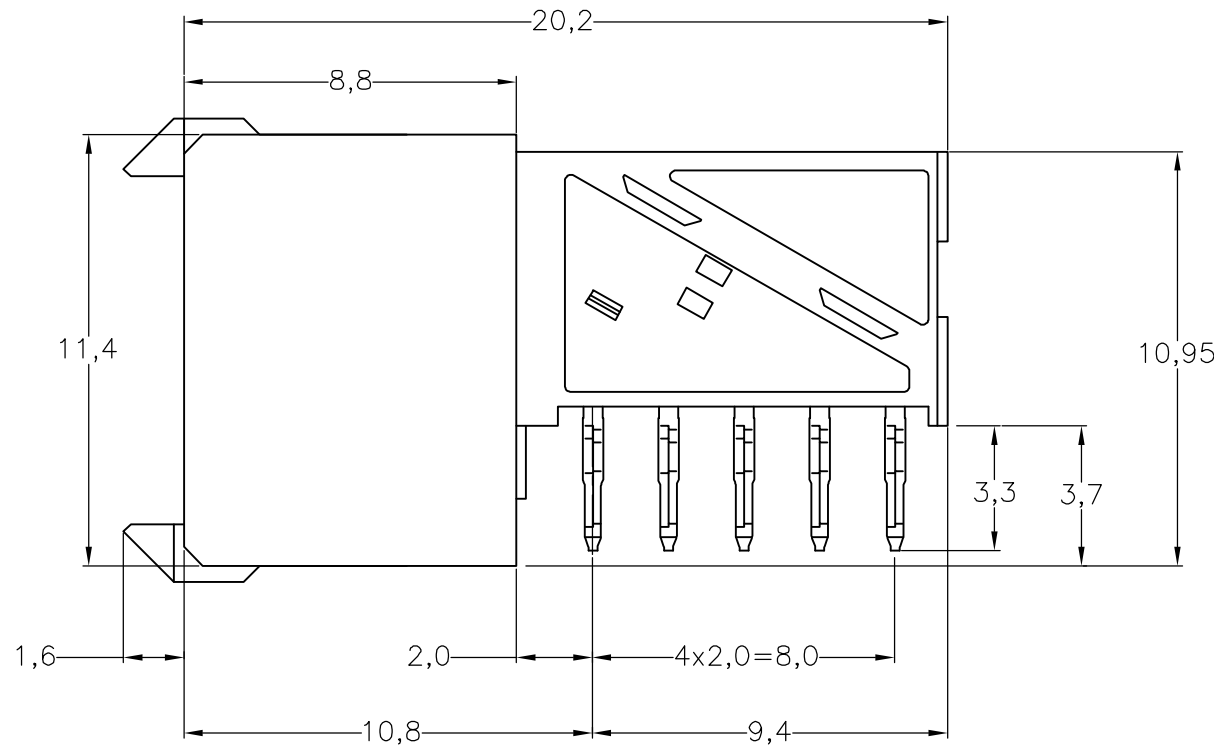
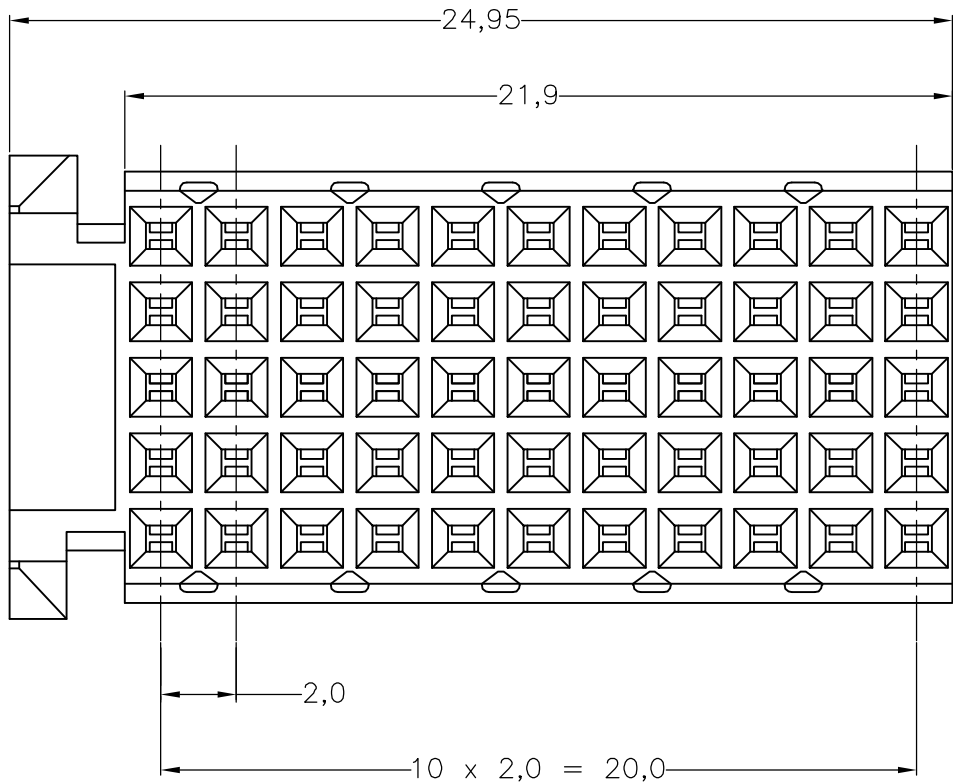
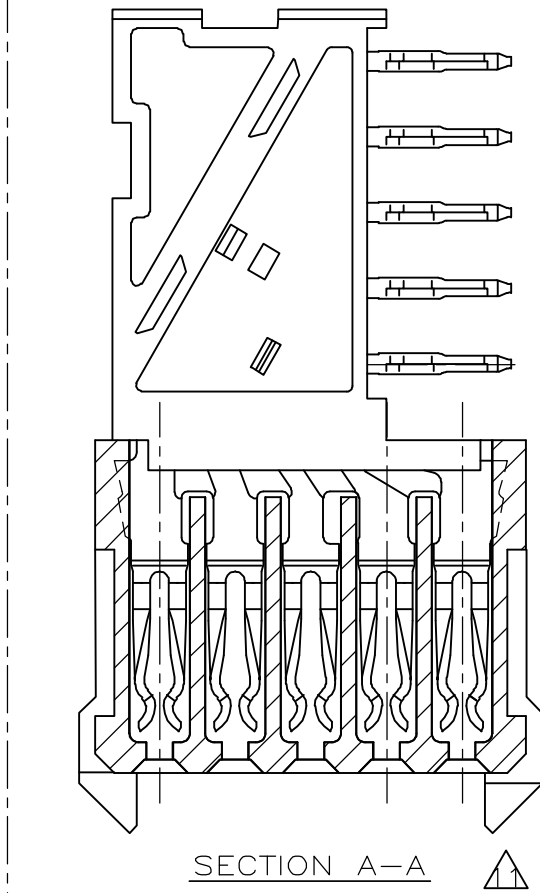
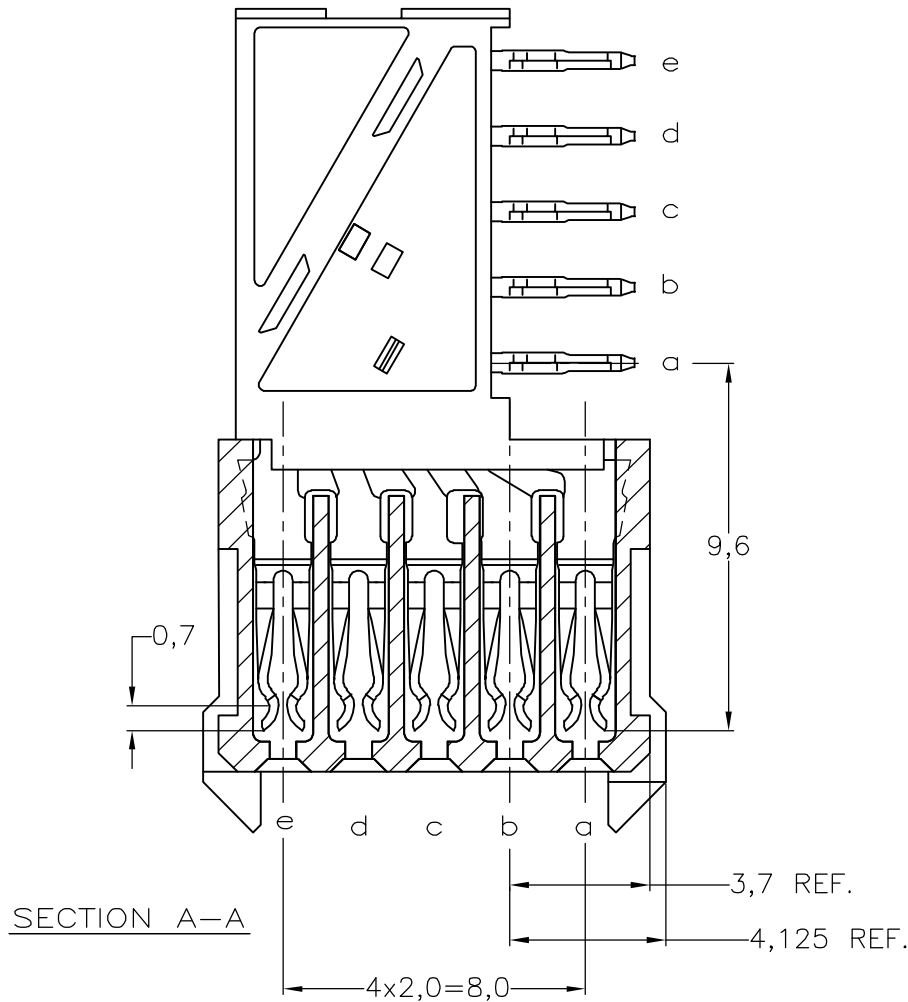
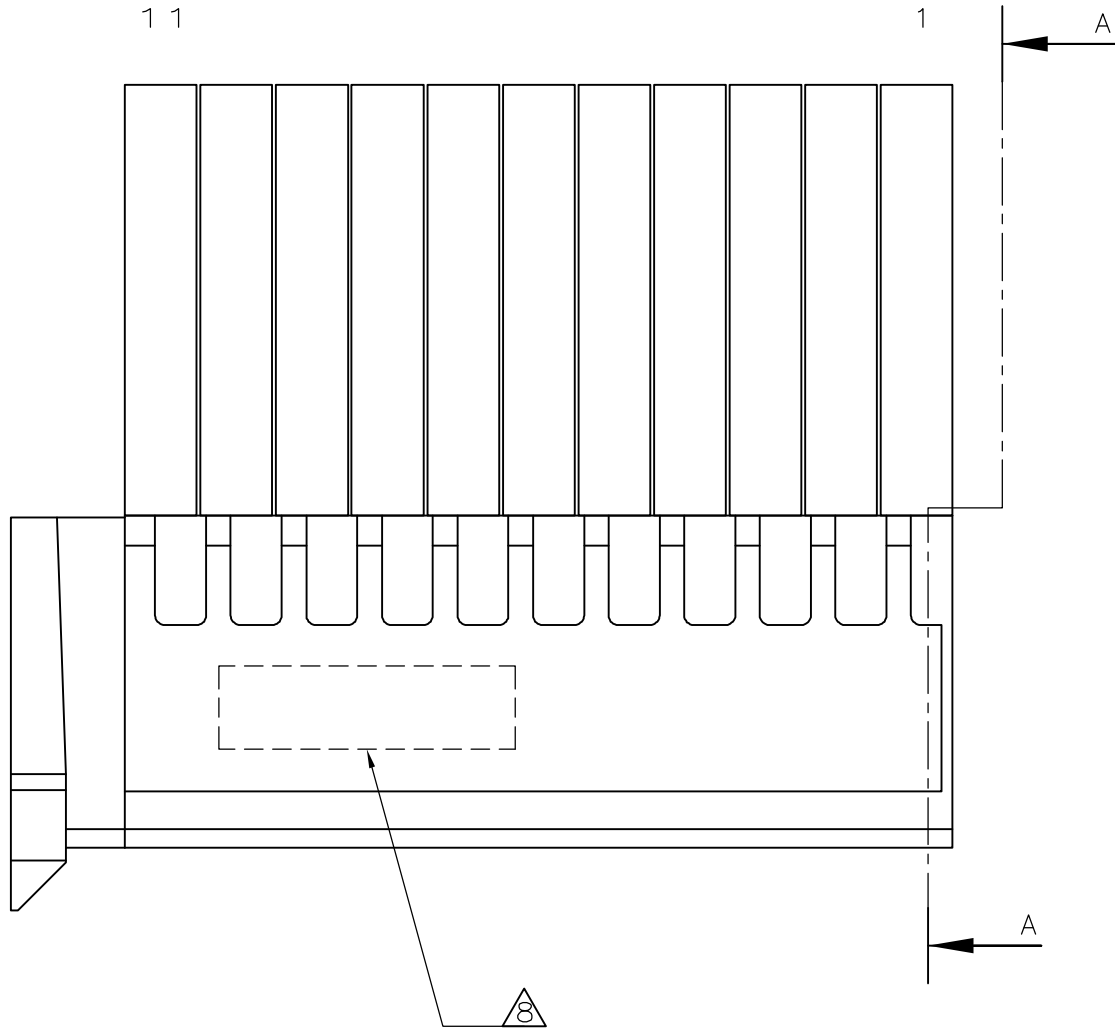


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
H	—		L	EHCO-0195-04	11-05-04	DvdB
			M	EH10-0680-05	01-06-05	BSV
			M1	ECR-06-002635	07-02-06	BSV
						BM
						BM
						BM

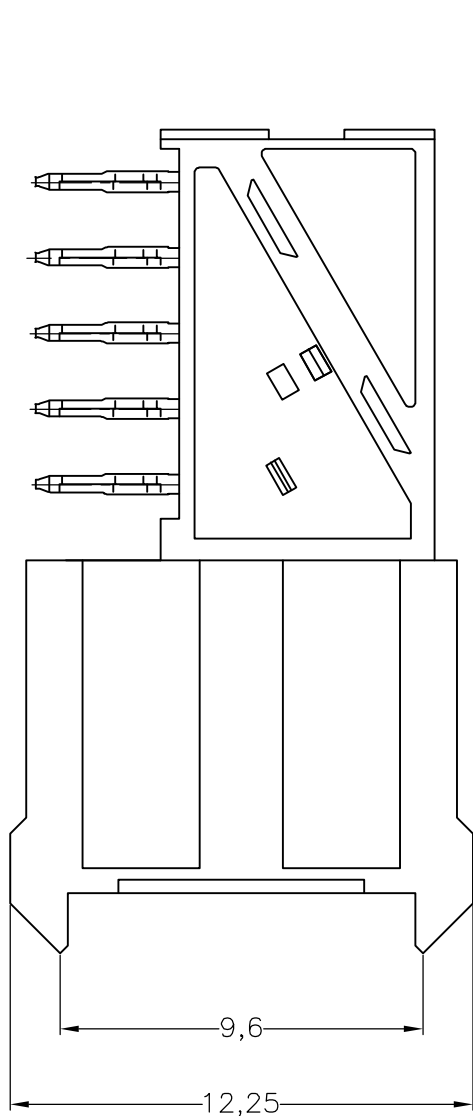

NOTES:

- MATERIAL CONTACT; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
UL-RATING 94VO.
- GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.
AND ACTION PIN: 0,5µm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
- CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
- CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR ON THE BACK SIDE.
- PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID. 55 HOLES
- FITS WITH INTEGRATED GROUND RETURN UPPERSHIELD, BASIC P.N. 352111
AND INTEGRATED GROUND RETURN LOWERSHIELD, BASIC P.N. 352112
- CONNECTOR ASSEMBLED WITH REDESIGNED CONTACTS.
CONTACTS HAVE A CORING-OUT IN THE PLASTIC.

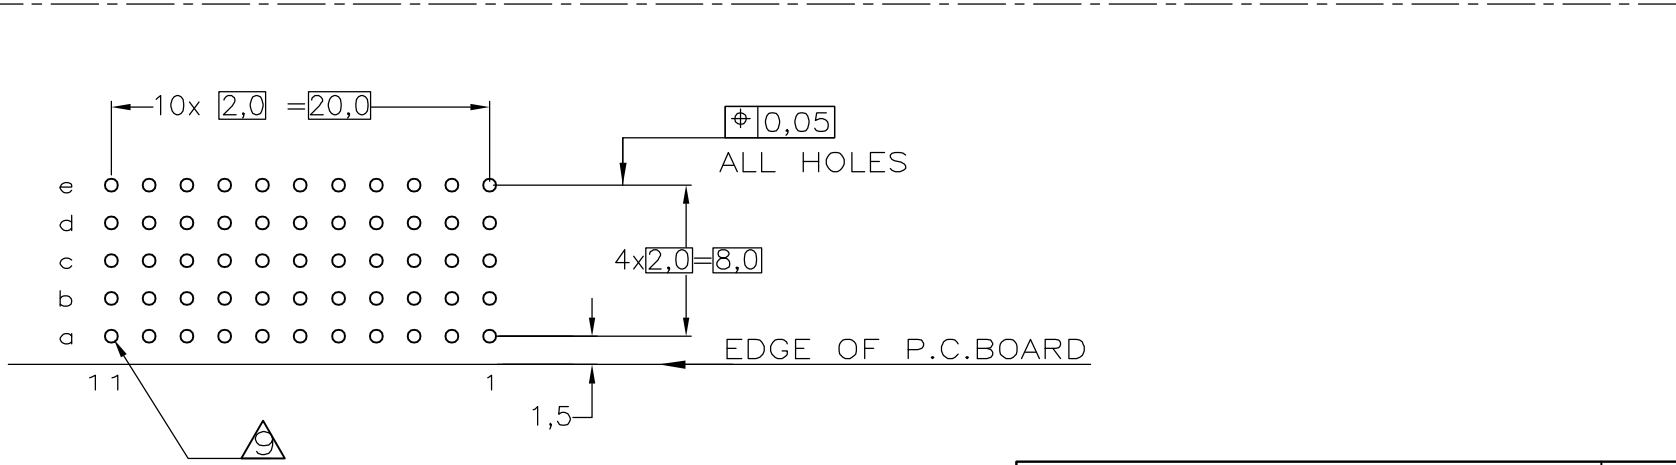

SCALE 2,5:1
COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	20JAN97	tyco Electronics Tyco Electronics Corporation s-HertogenBosch, Netherlands,		
DIMENSIONS:		CHK	20JAN97			
MM		W.V.D.HEIJDEN				
		APVD				
		F.V.KONINGSBRUGGE		NAME		
		PRODUCT SPEC		Z-PACK 2MM HM TYPE C		
		APPLICATION SPEC		55 POS. FEMALE CONNECTOR		
		108-19082				
		114-19029				
		WEIGHT		SIZE	CAGE CODE	DRAWING NO
		—		A2	00779	C=100161
		CUSTOMER DRAWING		SCALE	NTS	SHEET 1 OF 1
				REV M1		