

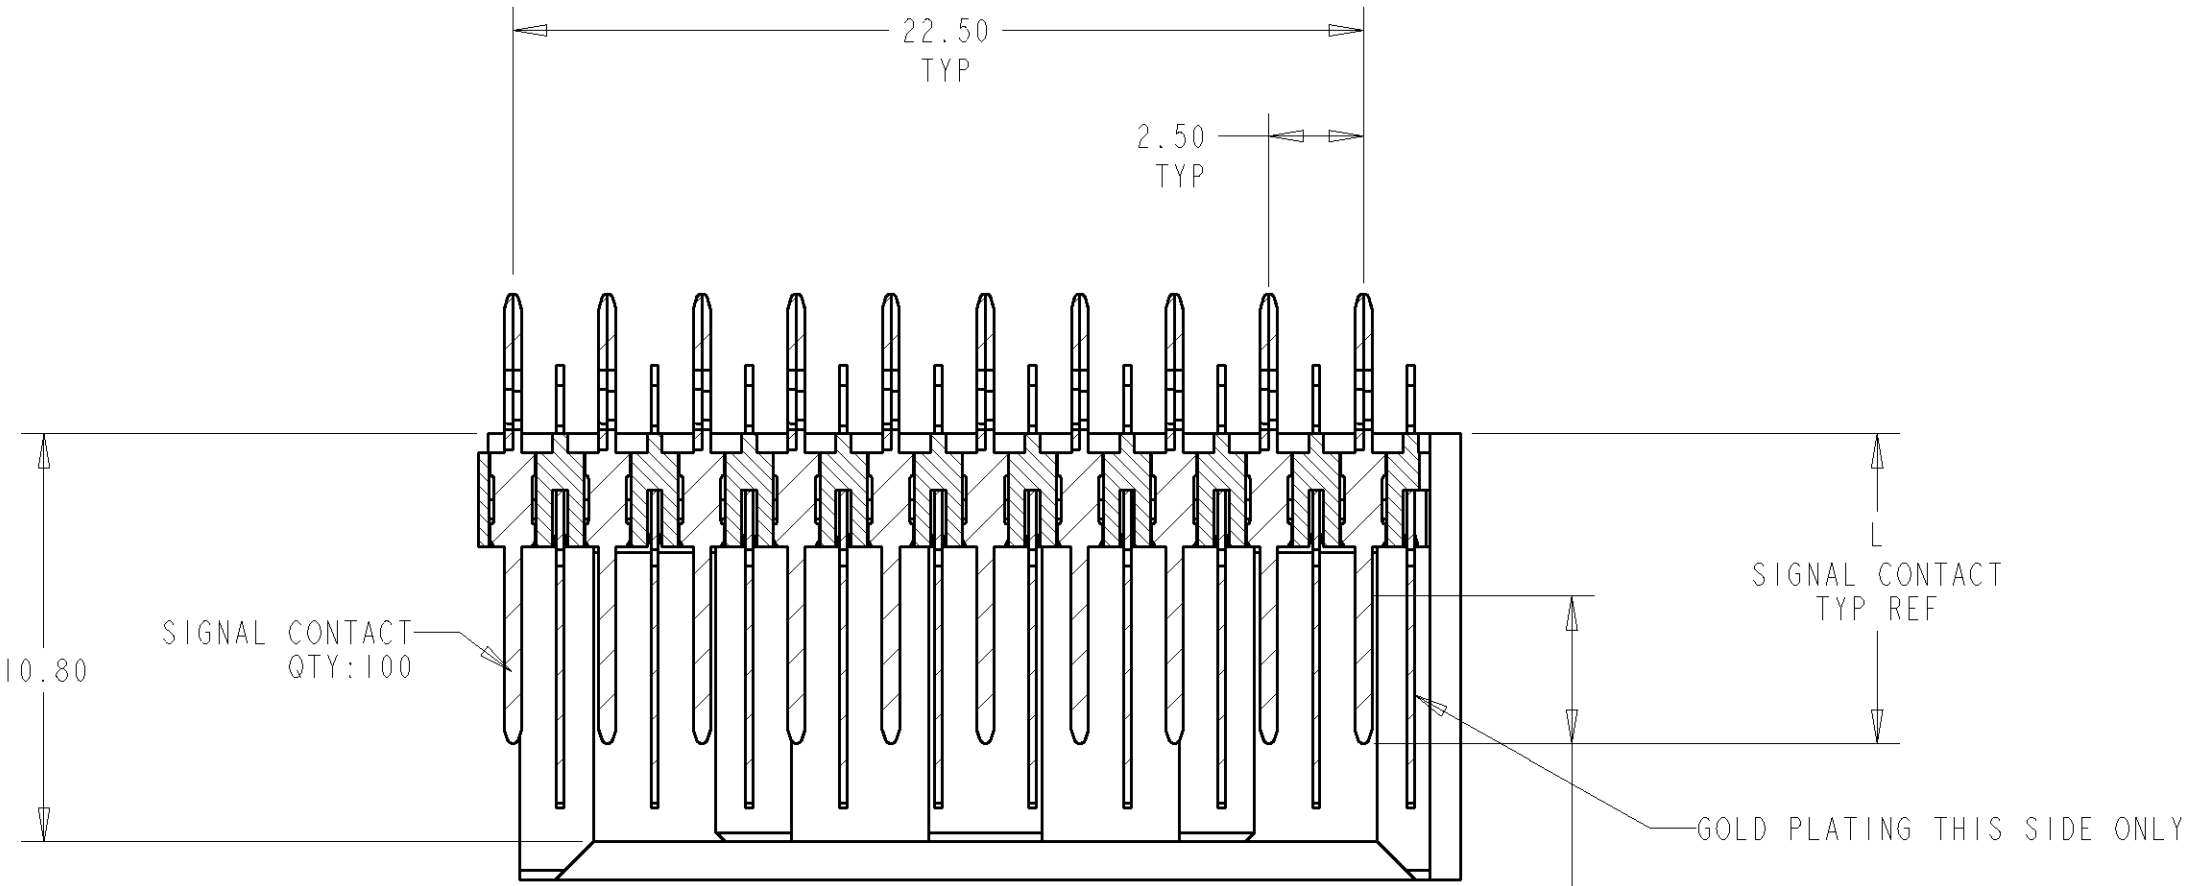
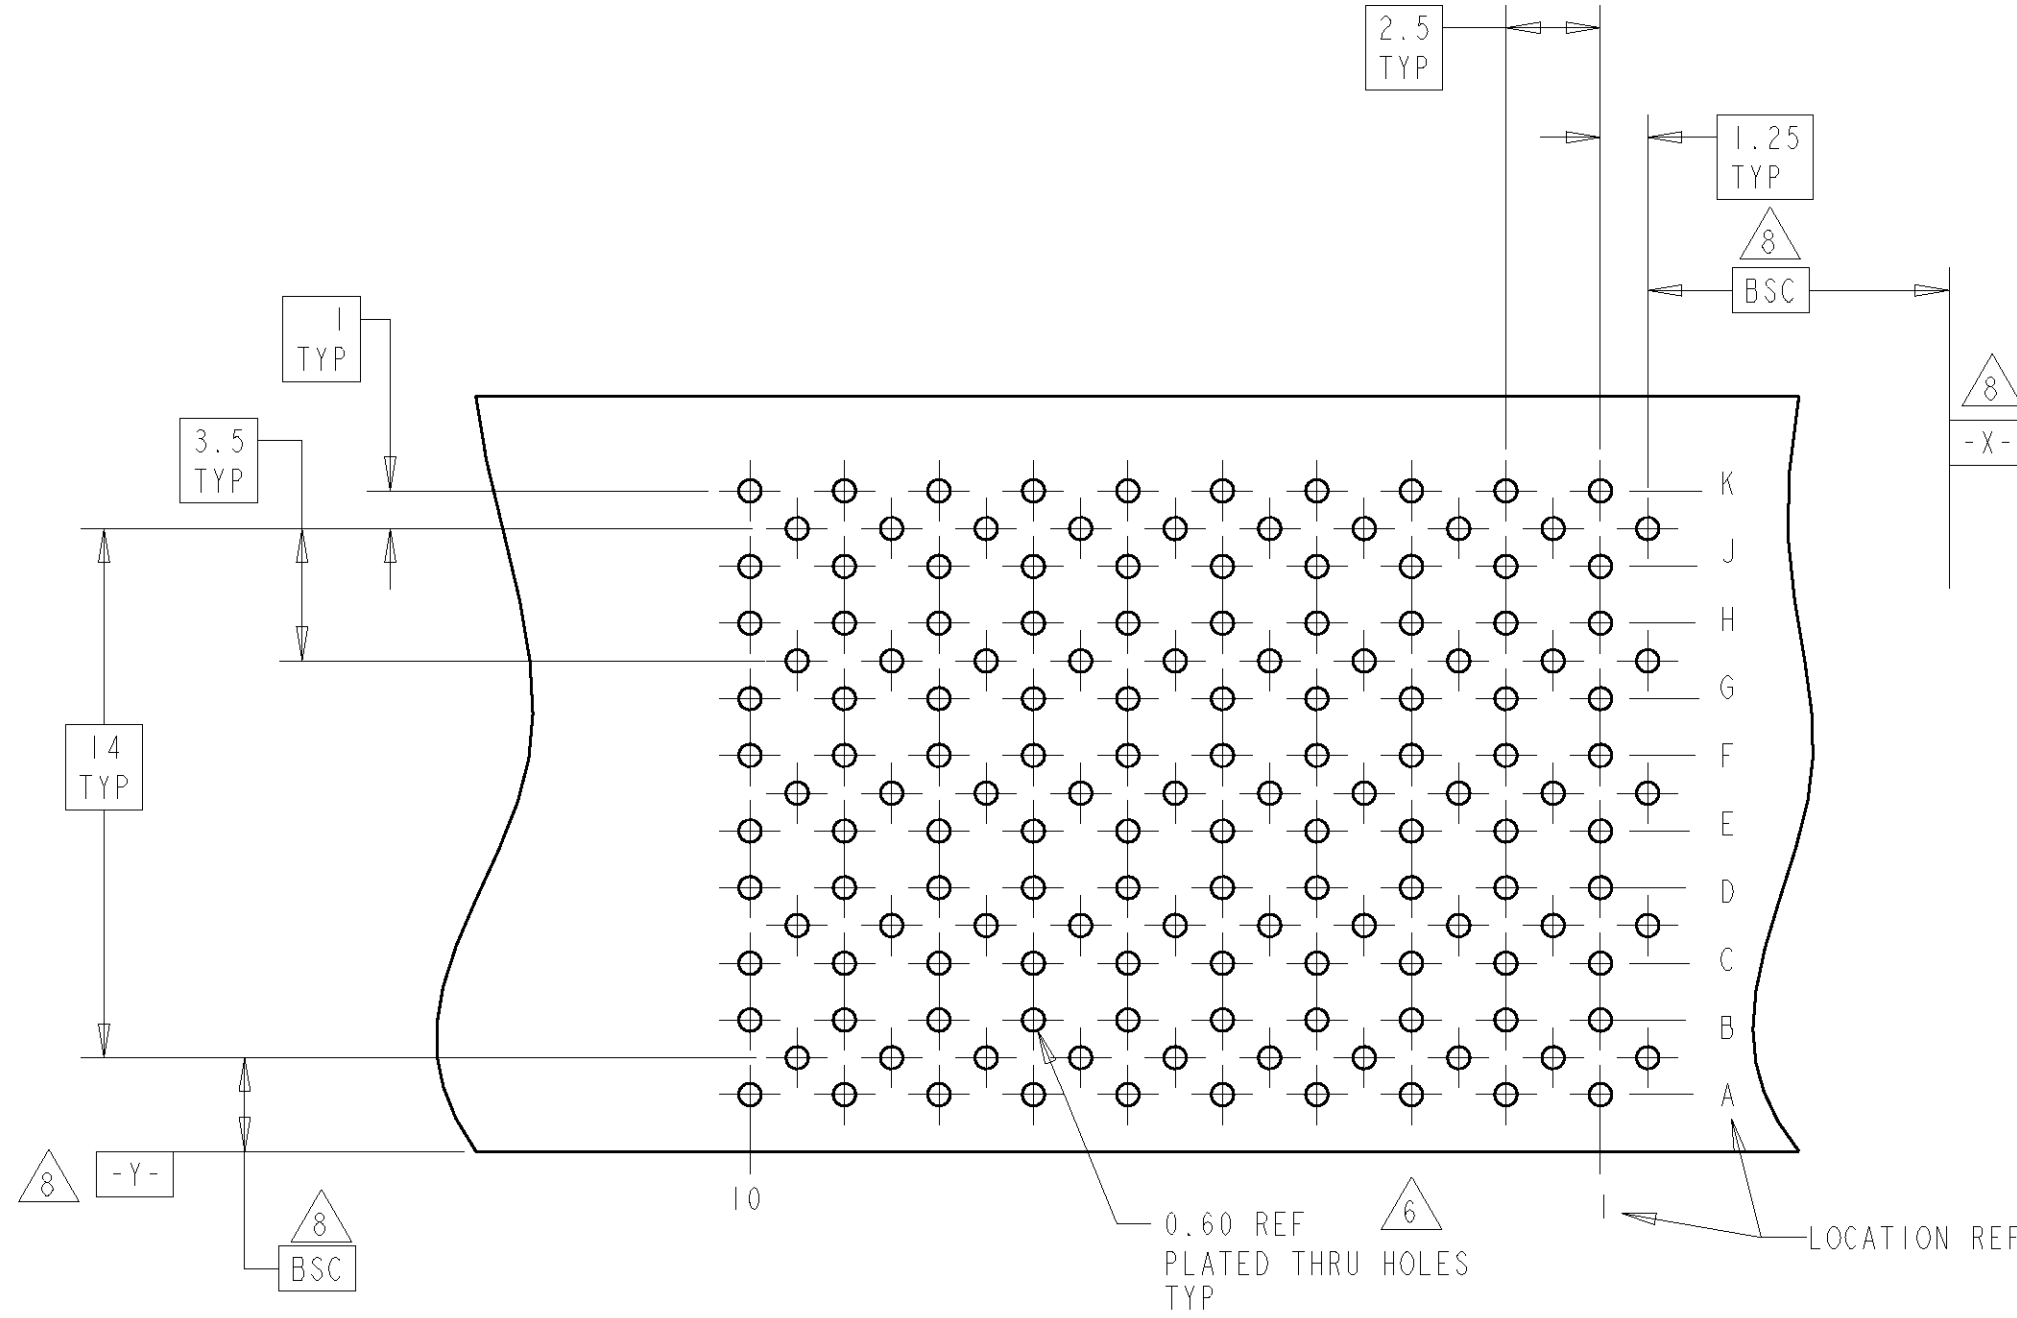


LOC	DIST	REVISIONS					
AD	47	P	LTR	DESCRIPTION	DATE	DWN	APVD
		E		REVISED PER 0512-0157-03	16OCT2003	SJM	RAP
		F		REVISED PER 0512-0411-03	02FEB03	SJM	RAP
		FI		REV PER ECO-06-024579	18JAN2007	JRP	RAP

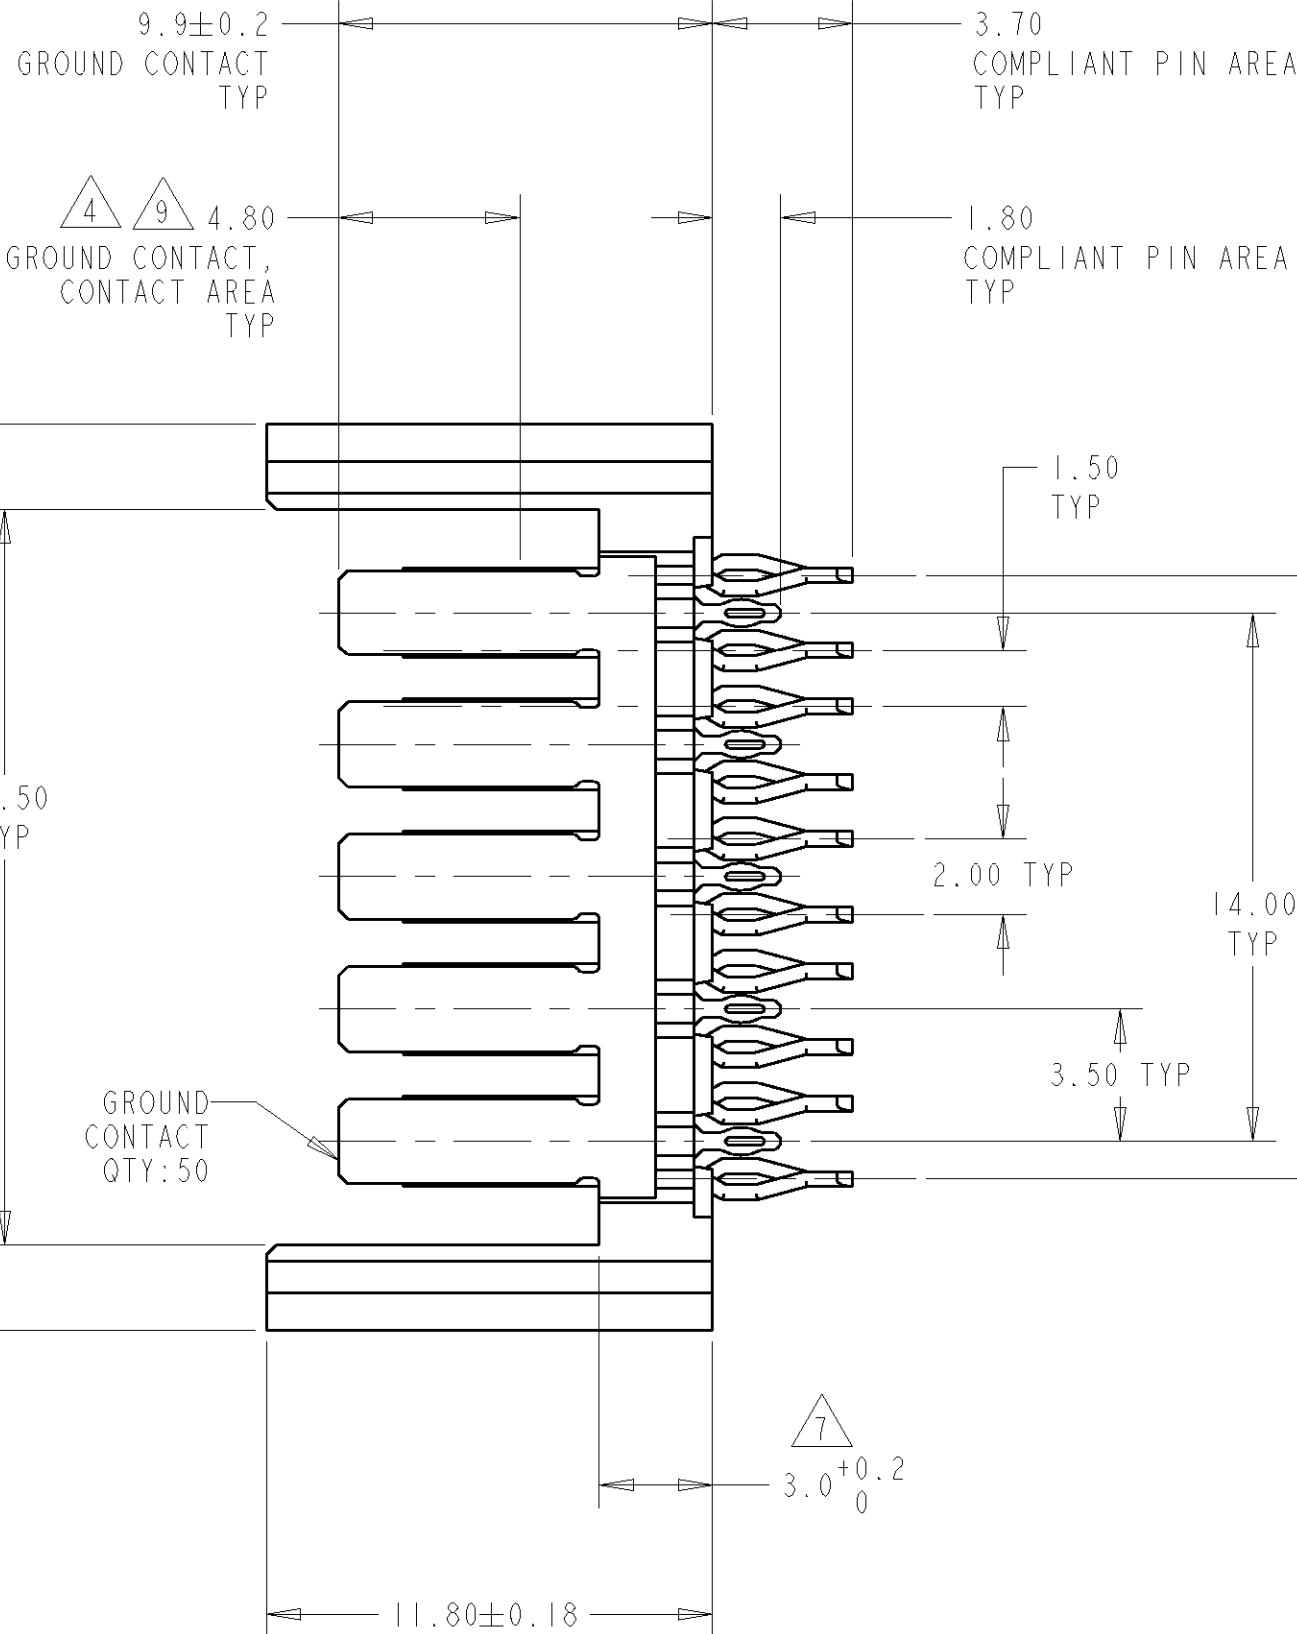


- 2 PHOSPHOR BRONZE
- 3 LCP, UL94V-0
- 4 0.76µm MIN GOLD OVER 1.27µm MIN NICKEL UNDERPLATE OR GOLD FLASH OVER 0.76µm MIN PALLADIUM-NICKEL OVER 1.27µm MIN NICKEL UNDERPLATE ON CONTACT AREA. 0.76µm MIN TIN LEAD OVER 1.27µm MIN NICKEL ON COMPLIANT PIN AREA
- 5 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6 REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 7 APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- 8 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 9 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

SECTION B-B

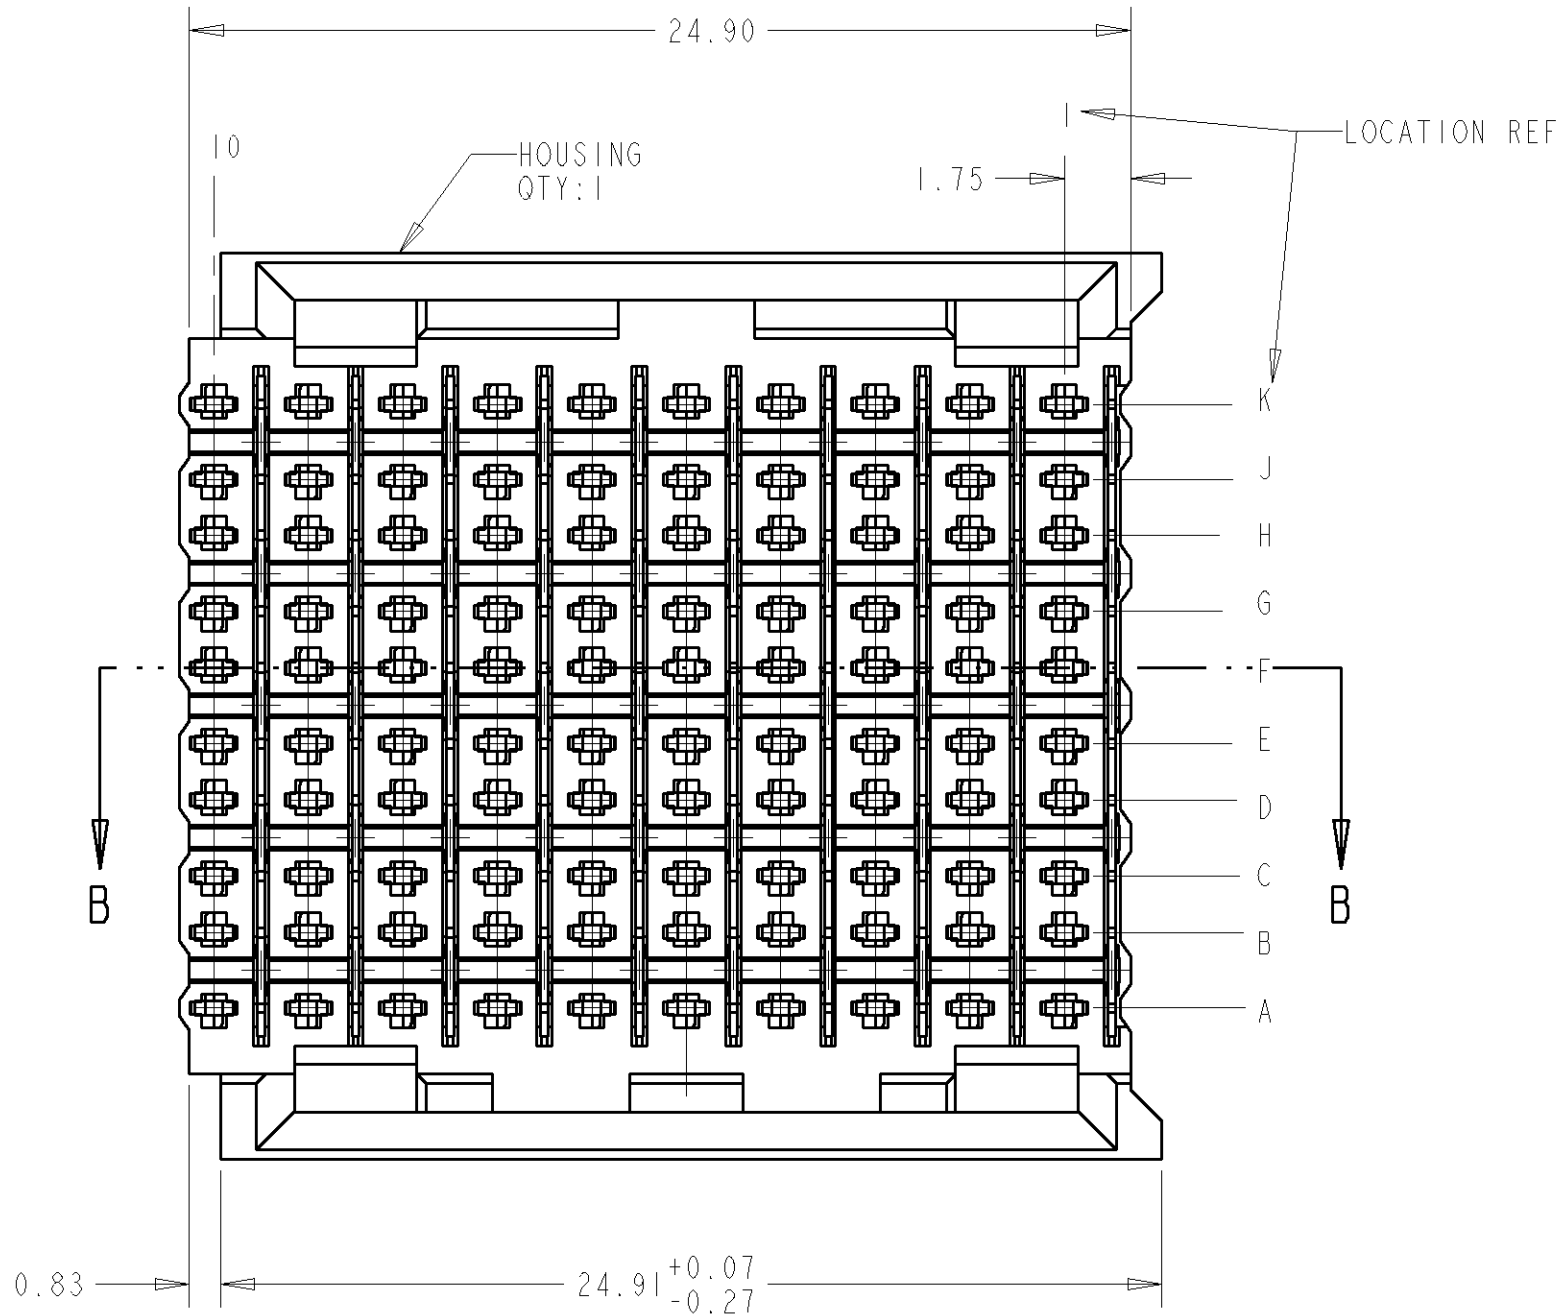

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

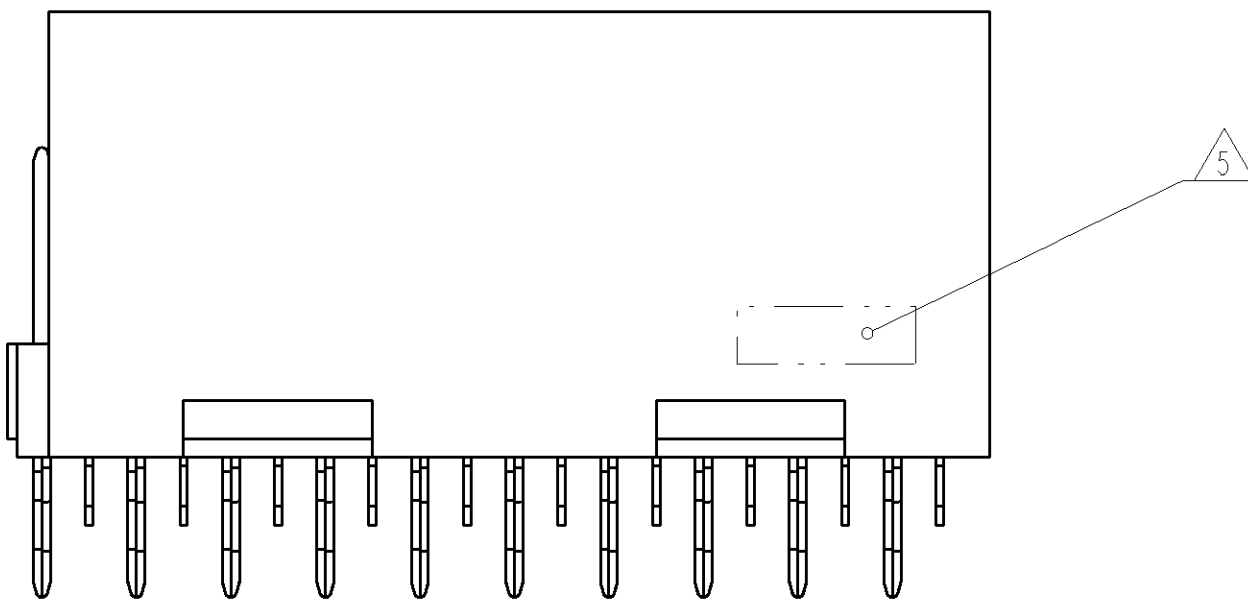

5.30	9.7	120658-2
3.90	8.2	120658-1
M	L	PART NUMBER

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN H. MOLL 14APR99		Tyco Electronics Harrisburg, PA 17105-3608	
mm		0 PLC ±		CHK HW ANDREWS 14APR99	NAME		
		1 PLC ±		APVD HW ANDREWS 14APR99	PRODUCT SPEC		
		2 PLC ±0.13			APPLICATION SPEC		
		3 PLC ±0.05			WEIGHT		
		4 PLC ±			CUSTOMER DRAWING		
		ANGLES			SIZE CAGE CODE DRAWING NO RESTRICTED TO		
MATERIAL HOUSING: 3		FINISH			A 00779 C=120658		
CONTACTS: 2		SIGNAL CONTACT: 4			SCALE 5:1 SHEET 1 OF 1 REV F		