

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
 OPERATING TEMPERATURE -55°C TO 125°C
 CONTACT RESISTANCE 20 MΩ MAX
 INSERTION FORCE 0.75 N MAX /CONT
 EXTRACTION FORCE 0.15 N MIN /CONT
 INSULATION RESISTANCE 10⁴ MΩ MIN

NOTES


- 1. LEAD FREE INDICATOR : LF- LEAD FREE
- 2. PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
- 3. THIS PRODUCT IS CSA APPROVED THIS PRODUCT IS UL RECOGNISED
- 4. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- 5. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

This data is classified as secret. Reproduction or communication is prohibited without the prior written permission of the manufacturer.



All rights reserved. Reproduction or use in any form without the prior written permission of the manufacturer is prohibited.

LAY OUT
P.C.B.-HOLE

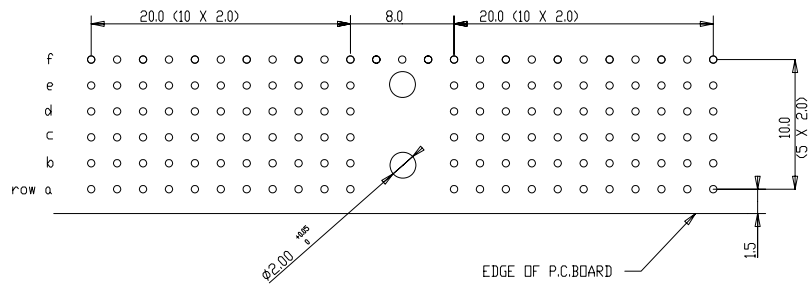

Material		Spec ref		tolerance	projection	size	Scale
Heat-treat		✓		ASME Y14.5M	ASME Y14.5M	A1	5.000
Plating/Finish							
rev	ecr no	dr	date	Dr	W.Panis	Product family	MILLIPACS
A	000000	KN	14-9-01	Eng		Model Name	HMR01PAS108----
B	0005-056	GuoJM	03/08/05	Dr		Model Revision	REL Level
C	0007-062	Kason	05/09/07	Appr			
FCI		MPACS 5+2R RA RCP		CONN TYPE A		BS,C,201444,035	
07	INDUSTRIAL DIMEN	RH	09/08/01	Pro/E file	catalog no	HMR01PAS108----	CUSTOMER DRAWING sheet 1 of 1