





PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM "A"
85839-X01/X01LF	1.6	2.90
85839-X11/X11LF	2.4	3.53




P/N 85839-XXX OR XXXLF

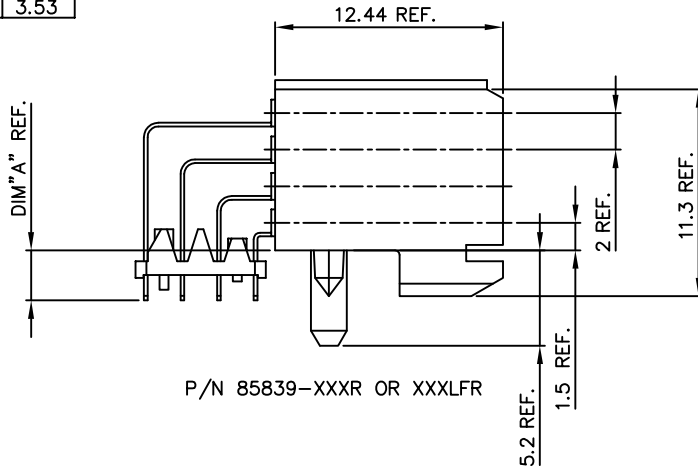


P/N 85839-XXXR OR XXXLFR

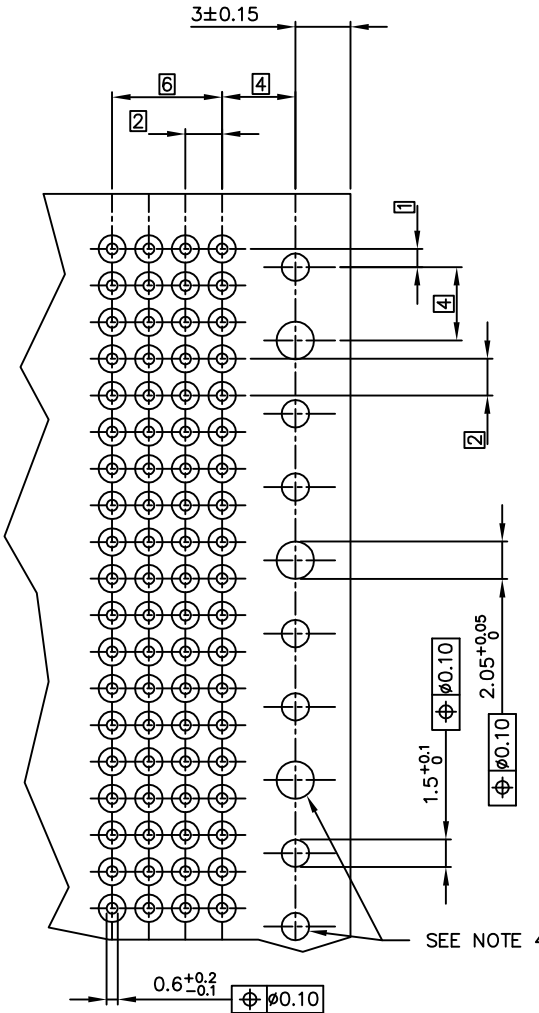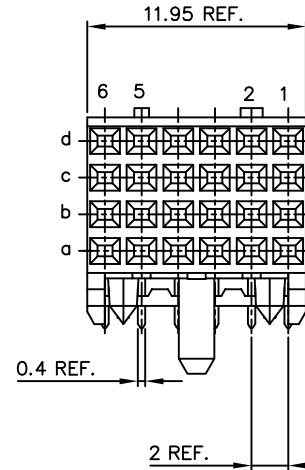

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

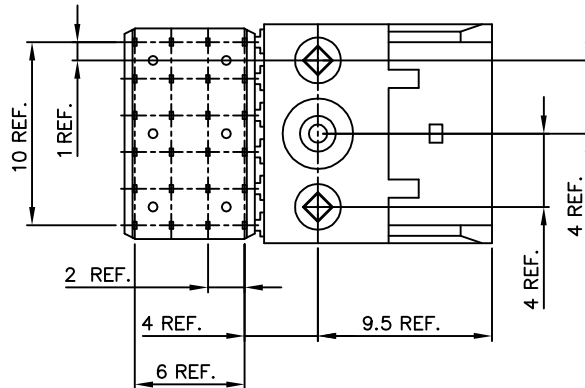

PRODUCT AFTER HOT RIVETTING.

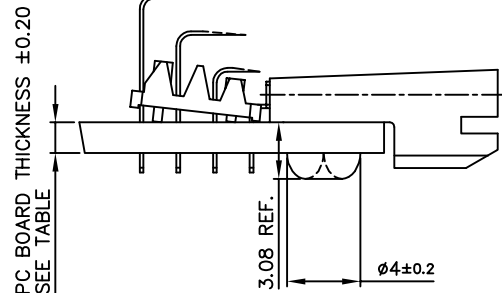

PC BOARD THICKNESS ±0.20
SEE TABLE

- NOTES:
- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
 - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - 3 PLATING SOLDER TAILS 2-8 um SnPb 90-97 OR 2-8 um PURE Sn FOR LEAD FREE.
 - 4 INDICATED HOLES ARE UNPLATED.
 - 5 PRODUCT MARKING: PARTNUMBER & BATCH ID.
 - 6 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - 7 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

PLATING CONTACT AREA:	
PRODUCT NR:	PERFORMANCE AREA
85839-301/301LF	CUSTOMER SPECIAL
85839-701/701LF	CUSTOMER SPECIAL
85839-711/711LF	CUSTOMER SPECIAL

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
ltr	ecn no	dr	date	projection		title	
J	DG07-0189	Cent	05/15/07	linear		RA FEMALE SIGNAL STB 12 mm VERSION	
c	H80105	PHE	980211	angles		product fami	METRAL(tm)
D	H80149	PHE	980305	dr	P. Hendriks	971114	code
E	H90671	LLA	991220	engr	P. Schalk	971114	213
F	H10259	GNY	010629	chr	P. Schalk	971114	sheet
H	6004-0104	CLU	041223	app	H. Coolmans	971114	1 of 1
sheet	revision						
index	sheet						