
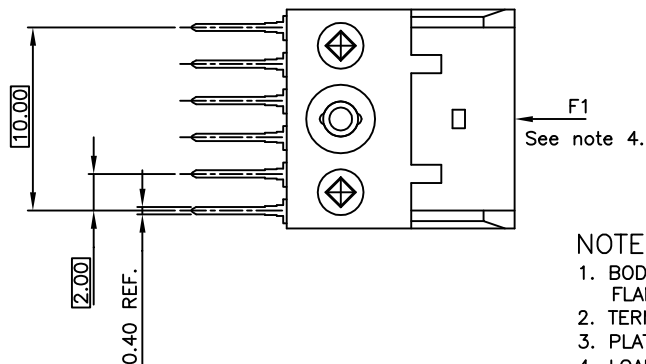
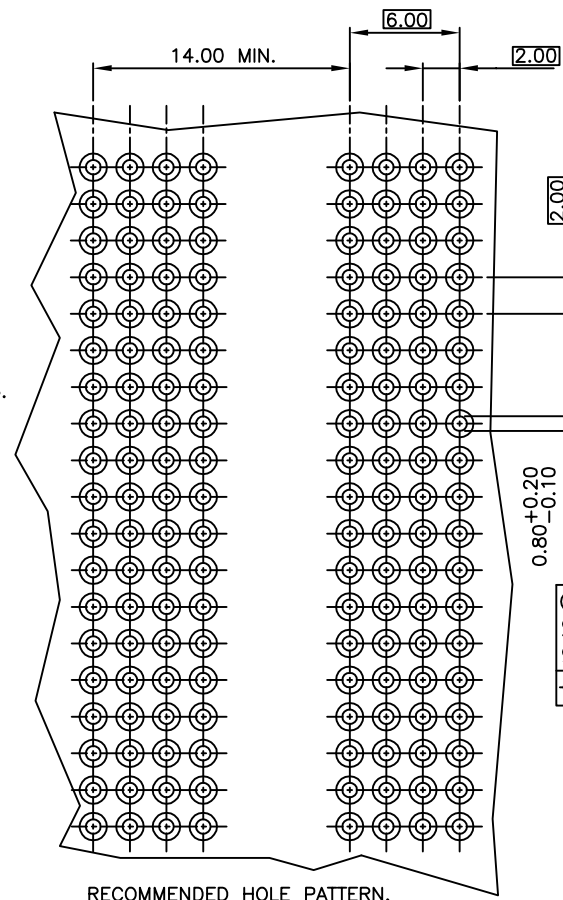
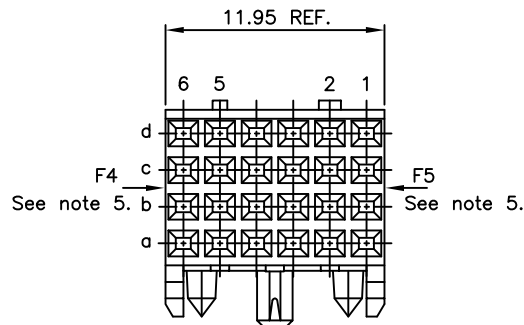


PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-1YYLF	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-3YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO

PRODUCT NR.	DIM "A"
88956-X01	5.00 REF.
88956-X11	3.35 REF.
88956-X20	5.76 REF.
88956-X01LF	5.00 REF.
88956-X11LF	3.35 REF.
88956-X20LF	5.76 REF.

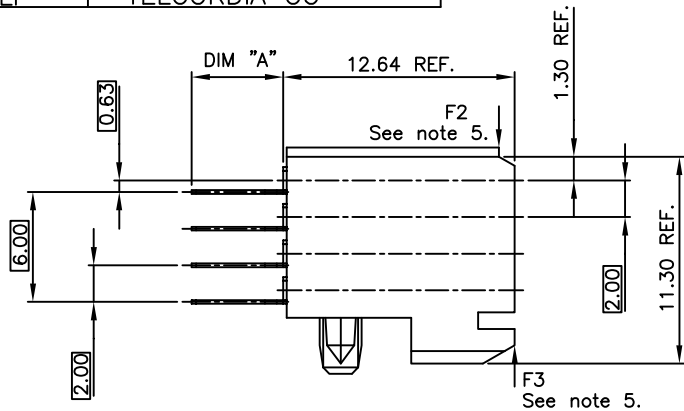

NOTES:

- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
- TERMINAL MATERIAL: PHOSPHOR BRONZE.
- PLATING SOLDER TAILS 2-8  $\mu\text{m}$  SnPb 90-97 OR PURE Sn FOR LF.
- LOAD IN THIS DIRECTION ( E.G. THROUGH CODING) 30 NEWTON MAXIMUM PER CONNECTOR.
- LOAD IN THIS DIRECTION 15 NEWTON MAXIMUM PER CONNECTOR.
- TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD THE USE OF A FIXTURE IS RECOMMENDED.
- PRODUCT MARKING: PARTNUMBER & BATCH I.D.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008 .
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY	FCI ELECTRONICS	
lfr	ecr no	dr	date	linear	projection	file
H	D007-0170	Cent	05/22/07			
J	D008-0171	TER	8/28/08	STR FEMALE STB SIGNAL 12MM		code 213
				product family METRAL (tm)		
D	H30732	HBO	931119	dr	R Rijken	910423
E	H40355	DOB	940527	engr	H.Bouwknegt	931119
F	H90430	DOB	990722	chr	A van Zanten	910423
G	0005-048	CLU	051115	app	van Woensel	911210
sheet	revision	J		mm	scale	5:1
index	sheet	1		A2	size	dwg no 88956
						sheet 1 of 1