
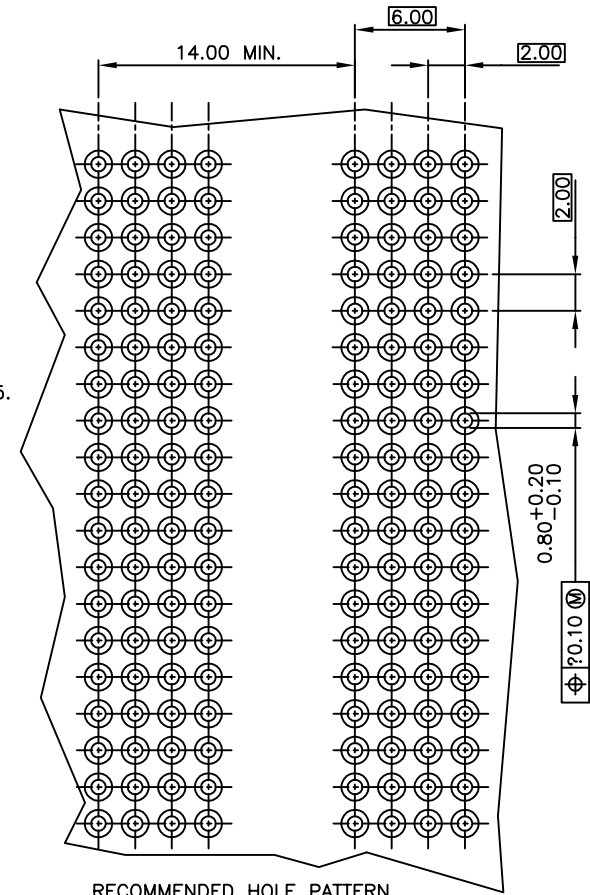
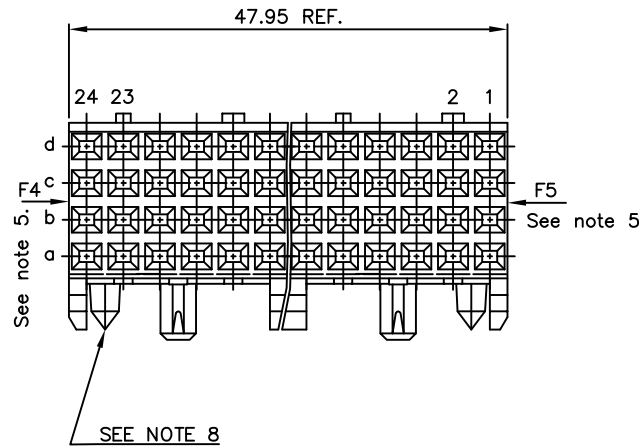


PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-1YYLF	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-3YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO

PRODUCT NR.	DIM "A"
88963-X01	5.00 REF.
88963-X11	3.35 REF.
88963-X01LF	5.00 REF.
88963-X11LF	3.35 REF.

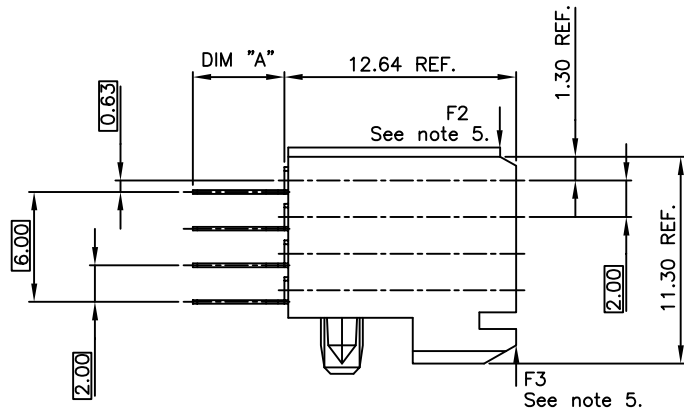

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

NOTES:

- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
- TERMINAL MATERIAL: PHOSPHOR BRONZE.
- PLATING SOLDER TAILS 2-8 μ m SnPb 90-97 OR PURE FOR Sn FOR LF.
- LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON PER 12 MM CONNECTOR LENGTH.
- LOAD IN THIS DIRECTION 50 NEWTON MAXIMUM PER CONNECTOR.
- TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD, THE USE OF A FIXTURE IS RECOMMENDED.
- PRODUCT MARKING: PARTNUMBER & BATCH I.D.
- DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008 .
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
ltr	ec'n no	dr	date	projection	title	product family	code
H	D008-071	TER	8/26/08	Linear	STR FEMALE STB	METRAL (tm)	213
c	H30732	HBO	931119	angles	SIGNAL 48MM	size	dwg no
D	H40355	DOB	940712	dr	H.Bouwknegt	930120	mm
E	V91450	DOB	990827	engr	H.Bouwknegt	931122	scale
F	p005-048	CLU	051121	chr	J.Wintjes	930121	5:1
G	D607-0170	Cent	05/22/07	app	H.Bouwknegt	930121	A2
sheet	revision	H					88963
index	sheet	1					1 of 1

This drawing is the property of FCI Electronics. Reproduction or communication in any form without written authority from FCI Electronics is prohibited. © FCI Electronics

All rights strictly reserved. Reproduction or issue in kind, in any form without written authority from FCI Electronics is prohibited. © FCI Electronics