


PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE 0.75 N MAX /CONT
EXTRACTION FORCE 0.15 N MIN /CONT
INSULATION RESISTANCE 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
- THIS PRODUCT IS CSA APPROVED THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001 THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

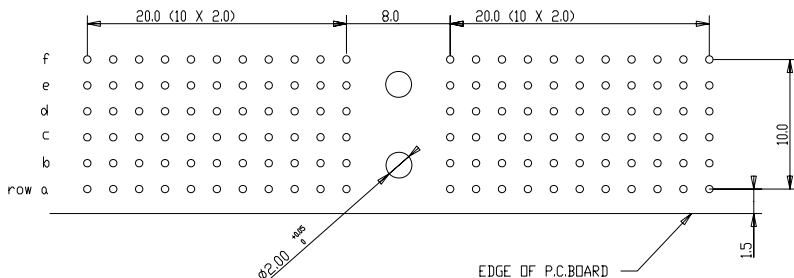

Material		Spec ref		tolerance	projection	size	Scale
Mat code		Heat-treat		±0.10	MM	A1	5.000
Plating/Finish		✓		±0.10	MM	A1	5.000
rev	ecn no	dr	date	Dr	4 2 92	J.V.B	
A	000000	KN	14-9-01	Eng			Product family MILLIPACS
B	0605-0278	GuoJM	03/08/05	Dir			Model Name HM2R0IPAS101----
C	0607-0362	Kason	05/09/07	Appr			Model Revision
FCI		MPACS 5+2R RA RCP		size		Scale	
CONN TYPE A		BS,C,201444,001		REL Level		Rev.	
IS	REC 93546	RH	10601	Pro/E file	catalog no	HM2R0IPAS101----	CUSTOMER DRAWING sheet 1 of 1

This drawing is the property of FCI. It is to be used for the production of the product only. It is not to be used for any other purpose. All rights reserved.

All rights reserved. Reproduction or use of this drawing is prohibited without the written authority from the proprietor.