

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)  
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)

OPERATING TEMPERATURE -55°C TO 125°C

CONTACT RESISTANCE 20 MΩ MAX

INSERTION FORCE 0.75 N MAX /CONT

EXTRACTION FORCE 0.15 N MIN /CONT

INSULATION RESISTANCE 10<sup>4</sup> MΩ MIN


- NOTES
- LEAD FREE INDICATOR : LF- LEAD FREE
  - PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
  - THIS PRODUCT IS CSA APPROVED THIS PRODUCT IS UL RECOGNISED
  - FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
  - THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

This data is classified as secret. Reproduction or communication is prohibited without the prior written permission of the manufacturer.



All rights reserved. Reproduction or use in third parties is prohibited without the prior written permission of the manufacturer.

LAY OUT  
P.C.B.-HOLE

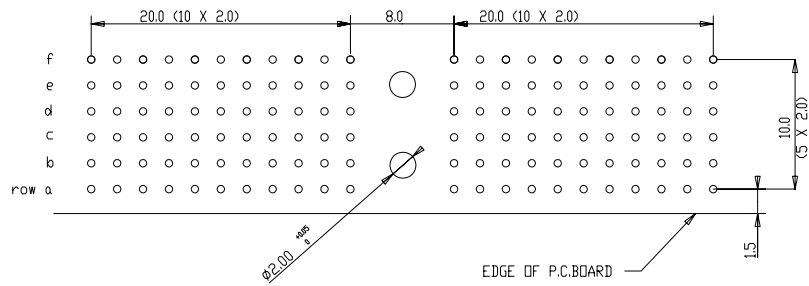

Material		Spec ref		tolerance	projection	size	Scale
Mat code		Heat-treat		MM			
Plating/Finish		✓		ASME Y14.5	ASME Y14.5		
rev	ecn no	dr	date	Dr	W.Panis	Product Family	MILLIPACS
A	000000	KN	14-9-01			Model Name	HM2R0IPAS101----
B	0005-056	GuoJM	03/08/05			Model Revision	REL Level
C	0007-062	Kason	05/09/07				
Appr		FCI		MPACS 5+2R RA RCP		BS,C,201444,018	
Title		CONN TYPE A		Rev.		C	
IS	REC 32546	RM	10601	Pro/E file	catalog no	HM2R0IPAS104----	CUSTOMER DRAWING sheet 1 of 1