

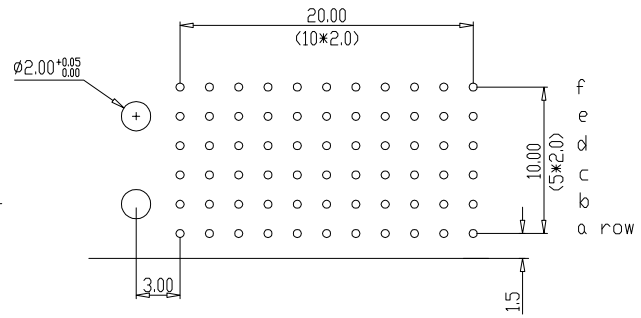
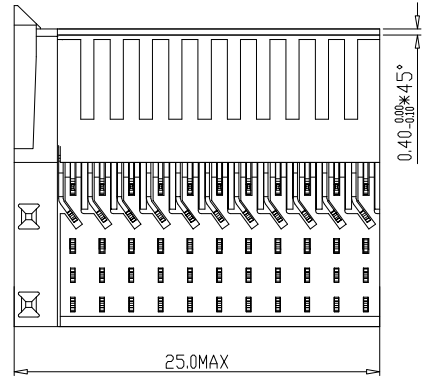


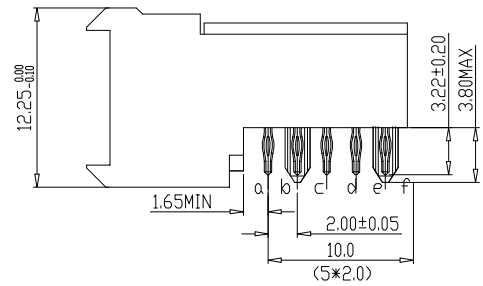


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

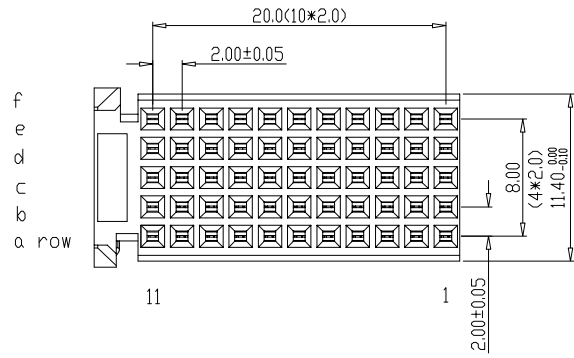

PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 mΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10<sup>4</sup> MΩ MIN



- THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 05	KN	14-09-01
B	105-0093	MINI	08-06-05
C	DG05-0278	Kason	02-08-05
D	DG07-0362	Kason	05-09-07
-	-	-	-
-	-	-	-
05	BEC 9.3546	RM	110601

Material		Spec ref	
Mat code		tolerance 1DEC ± 0.2 1DEC 2DEC ± 0.1 2DEC ANGLES ± 1° HOEKEN	projection
Heattreat			MM
Plating/Finish		size A4	Scale 2.000
Dr	W.Panis 07-04-92		
Eng		Product family MILLIPACS	
Chr		Model Name	
Appr		Model Revision	
		REL Level	
FCI title		MPACS 5+2R RA RCP CONN TYPE C	
Pro/E file		dwg no	BSC201418003
catalog no		HM2R03PA5100----	
		CUSTOMER DRAWING	sheet 1 of 1
		Rev.	D