

PERFORMANCE CHARACTERISTICS


CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE :0.75 N MAX /CONT
EXTRACTION FORCE: 0.15 N MIN /CONT
INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS.C.201844,003)
- THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

LAY OUT
P.C.B.-HOLE

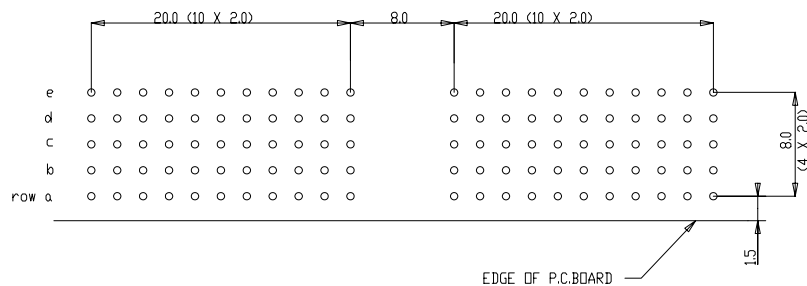

EDGE OF P.C.BOARD

Material		Spec ref		tolerance	projection	unit	
Mat code		Heat treat		±0.05	±0.10	MM	
Plating/Finish		Dr		4	2	92	
rev	ecn no	dr	date	Eng	Product family	size	Scale
A	CONNECTION	KN	14-9-01	J.V.B	MILLIPACS	A1	5.000
B	105-0093	MNI	08/06/05		Model Name	ECN	
C	3005-0278	Kason	02/08/05		Model Revision	RCL Level	
D	3006-0274	Kason	05/07/06				
E	3007-0362	Kason	05/09/07				
F	3008-0159	Nickor	06/02/08				
Pro/E File		catalog no		HM2R0FA5100----		CUSTOMER DRAWING sheet 1 of 1	