


PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)  
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)  
OPERATING TEMPERATURE -55°C TO 125°C  
CONTACT RESISTANCE 20 MΩ MAX  
INSERTION FORCE 0.75 N MAX /CONT  
EXTRACTION FORCE 0.15 N MIN /CONT  
INSULATION RESISTANCE 10<sup>4</sup> MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
- THIS PRODUCT IS CSA APPROVED THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001 THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

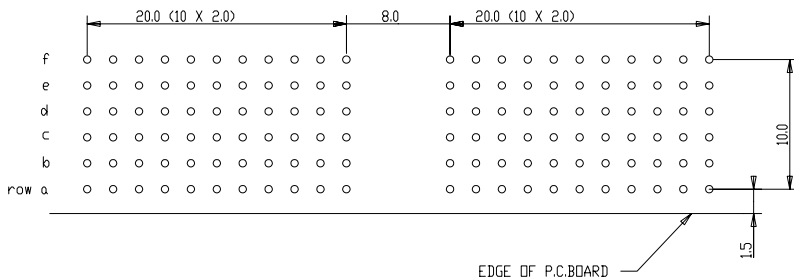

Material		Spec ref		tolerance	projection	size	Scale
Mat code		Heat-treat		AS 1 TO 100	AS 1 TO 100	A1	5.000
Plating/Finish		W.Panis		REL LEVEL		REL LEVEL	
rev	ecn no	dr	date	Dr	4 2 92	Product family	MILLIPACS
A	000000	KN	14-9-01	Eng		Model Name	HMERRIOPAS101----
B	05-0093	MNI	08/06/05	Appr		Model Revision	REL LEVEL
C	0005-0078	KASIN	02/08/05	FCI		Part no	BS,C,201444,008
D	0007-0062	Kason	05/09/07	FCI		Part no	BS,C,201444,008
-	-	-	-	FCI		Part no	BS,C,201444,008
-	-	-	-	FCI		Part no	BS,C,201444,008
Title		MPACS 5+2R RA RCP		CONN TYPE A		Rev. D	
Pro/E file		catalog no		HMERRIOPAS101----		CUSTOMER DRAWING sheet 1 of 1	