
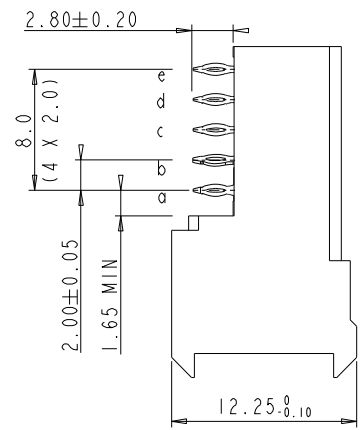


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.

**FCI**


All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

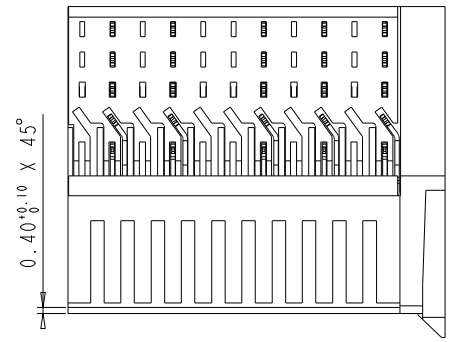

PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10<sup>4</sup> MΩ MIN


□ EMPTY CAVITY  
 ◼ CAVITY LOADED WITH CONTACT

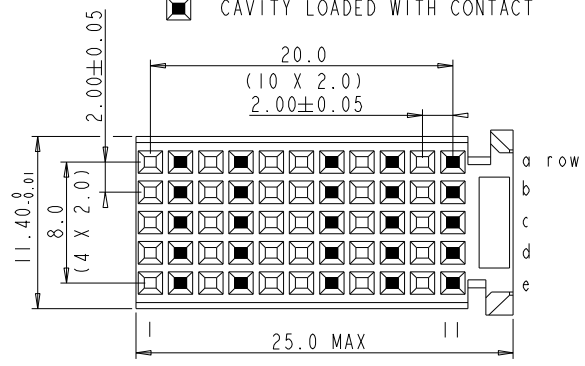

NOTES 1. " " LEAD FREE INDICATOR : LF=LEAD FREE

- PERFORMANCE LEVEL INDICATOR (REF DWG NO. BSC 201844.003)
- 2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001
- 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

LAY-OUT P.C.B. - HOLE

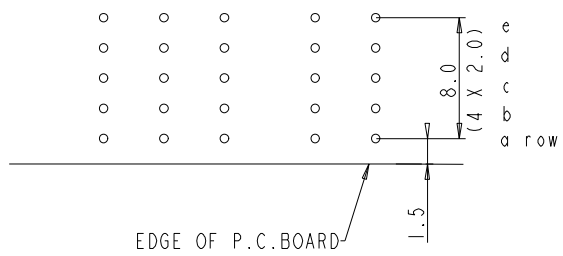

rev	ecn no	dr	date
A	CONVERSION REVISION 02	KN	14-09-01
B	DG05-0278	Kason	02-08-05
-	-	-	-
-	-	-	-
-	-	-	-

Material		Spec ref	
Mat code		tolerance IDEC ± 0.2 IDEC 2DEC ± 0.1 2DEC ANGLES ± 1° HOEKEN	projection MM
Heatreat			
Plating/Finish		size A4	Scale 2.000
Dr	M.Fret 17-05-99		
Eng		Product family	MILLIPACS
Chr		Model Name	ECN DG05-0278
Appr		Model Revision	REL Level
		title	MPACS 5+2R RA RCP CONN TYPE C
Pro/E file	catalog	dwg no	BSC202468015
PDM: Rev-B		Rev.	B
STATUS: Released		sheet 1 of 1	