


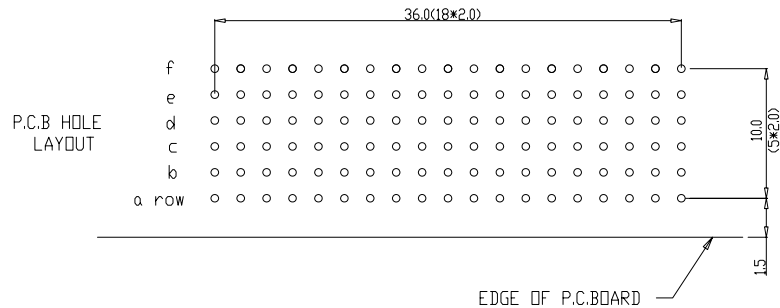


This entity is a trademark of the manufacturer. Reproduction or communication in any form, without the prior written consent of the manufacturer, is prohibited.

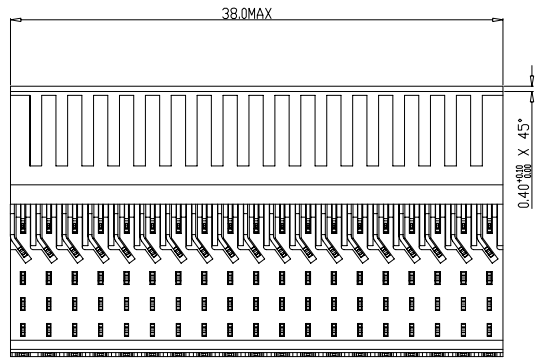

All rights reserved. Reproduction or use in any form without the prior written consent of the manufacturer is prohibited.

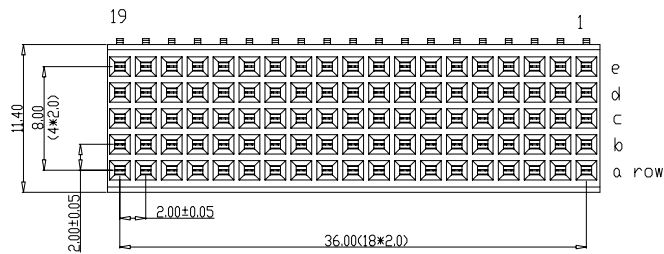

PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE: 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE : 20 m Ω MAX
- INSERTION FORCE: 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN /CONT
- INSULATION RESISTANCE: 10⁴ MΩ MIN

NOTES

1. LEAD FREE INDICATOR :LF=LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC .201844.003)
2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material		Spec ref	
Mat code	Heattreat	✓	TOLERANCE 1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1°HÖEKEN
Plating/Finish	Dr 15 10 97	Mfret	size A1
Dr	15 10 97	Mfret	Scale 5.000
Eng	Product family		
Chr	Model Name		ECN
Appr	Model Revision		REL Level
FCI title MPACS 5+2R RA RCP CONN TYPE B		BSC .201444.027	
Pro/E file	CAT.NO. HM2R71PA510F----	CUSTOMER DRAWING	Rev. D
		sheet 1 of 1	

rev	ecn no	dr	date
A	CONVERSION REVISION 01	KN	14-9-01
B	I05-0093	MINI	11-06-05
C	DG05-0278	kason	02-08-05
D	DG07-0362	kason	05/09/07