

VC-TR2/3M

Order No.: 1852901

The illustration shows the version VC-TR 1/2 M

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1852901>Sleeve frame, without PE, for contact insert modules, type 2, number
of insert modules 3

Commercial data

EAN	4017918133740
Pack	5 Pcs.
Customs tariff	85389099
Weight/Piece	0.00999 KG
Catalog page information	Page 292 (PC-2007)

Product notes

WEEE/RoHS-compliant since:
12/15/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Design	VC2
Height	27.5 mm
Width	65.2 mm
Ambient temperature (operation)	-40 °C ... 100 °C
Material	PA-GF

Inflammability class acc. to UL 94

V0

Certificates / Approvals

Approval logo




requested approbations

Certification

CUL, UL

Drawings

Dimensioned drawing

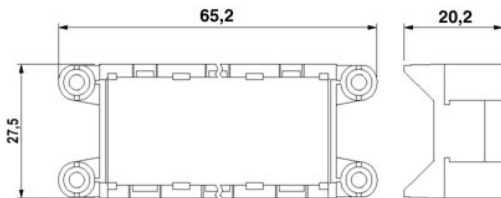

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact
Technical modifications reserved;