

## HC-B 10-TFL-52/M1PG16S

Order No.: 1771309

The illustration shows versions for double locking latch and single locking latch and with double locking latch



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771309>

Sleeve housing, for single locking latch, height 52 mm, with screw connection, 1x Pg16, lateral cable entry

### Commercial data

EAN	4017918036034
Pack	10 Pcs.
Customs tariff	76169910
Weight/Piece	0.163 KG
Catalog page information	Page 396 (PC-2007)

### Product notes

WEEE/RoHS-compliant since:  
03/01/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Design	B10
Height	52 mm
Width	43 mm

Length	73 mm
Housing type	Sleeve housings
Locking type	for single locking latch
Type of the screw connection	1x Pg16
Pg screw connection	With
Wrench size, union nut	22 mm
Cable exit	Lateral
External cable diameter	7.5 mm ... 15 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Screw connection material	Nickel-plated brass
Cable seal material	NBR

### Certificates / Approvals

#### Approval logo




#### requested approbations

Certification	GOST
---------------	------

### Drawings

#### Dimensioned drawing

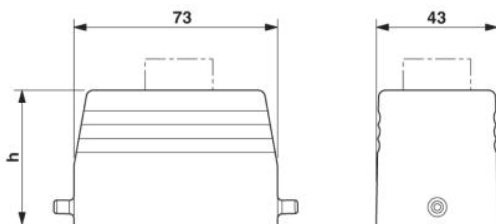

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact  
Technical modifications reserved;