

HC-B 24-TFQ-76/M1PG21G

Order No.: 1771781

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771781>

Sleeve housing, for double locking latch, height 76 mm, with screw connection, 1x Pg21, straight cable entry

Commercial data

| | |
|--------------------------|--------------------|
| EAN | 4017918036508 |
| Pack | 10 Pcs. |
| Customs tariff | 76169910 |
| Weight/Piece | 0.37761 KG |
| Catalog page information | Page 412 (PC-2007) |

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|--------|---|
| Note | For contact inserts HC-B24, BB46, D64, DD108, M |
| Design | B24 |
| Height | 76 mm |
| Width | 43 mm |

| | |
|---------------------------------|--------------------------|
| Length | 120 mm |
| Housing type | Sleeve housings |
| Locking type | For double locking latch |
| Type of the screw connection | 1x Pg21 |
| Pg screw connection | With |
| Wrench size, union nut | 28 mm |
| Cable exit | Straight |
| External cable diameter | 10 mm ... 19 mm |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Screw connection material | Nickel-plated brass |
| Cable seal material | NBR |

Certificates / Approvals

Approval logo




requested approbations

| | |
|---------------|------|
| Certification | GOST |
|---------------|------|

Drawings

Dimensioned drawing

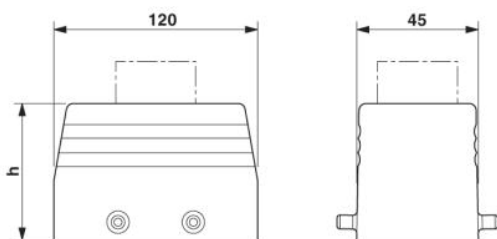

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact
Technical modifications reserved;