

## HC-D 7-AML-24/GR/ALU

Order No.: 1773035

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1773035>

HEAVYCON panel mounting base D7, with single locking latch, height 24 mm, straight, aluminum

### Commercial data

EAN	4017918122324
Pack	10 Pcs.
Customs tariff	76169910
Weight/Piece	0.02706 KG
Catalog page information	Page 423 (PC-2007)

### Product notes

WEEE/RoHS-compliant since:  
02/14/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Note	For contact inserts HC-D7, D8, A3, A4
Design	D7
Height	24 mm

Width	38 mm
Length	28 mm
Housing type	Panel mounting base, straight
Locking type	With single locking latch
Degree of protection	IP54 / IP65 with sealing screw
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	see above
Housing surface material	Powder-coated, gray (metal housing)
Seal material	NBR
Locking latch material	Steel, tin-plated (PA for HC-D 7...PA)
Length of the assembly cutout	21.5 mm
Width of the assembly cutout	21.5 mm

#### Certificates / Approvals

#### Approval logo



#### requested approbations

Certification	GOST
---------------	------

#### Accessories


Item	Designation	Description
------	-------------	-------------

#### Assembly

1686229	HC-D 7-DS-IP65	Sealing screw, for IP65 protection
---------	----------------	------------------------------------

## Drawings

### Dimensioned drawing

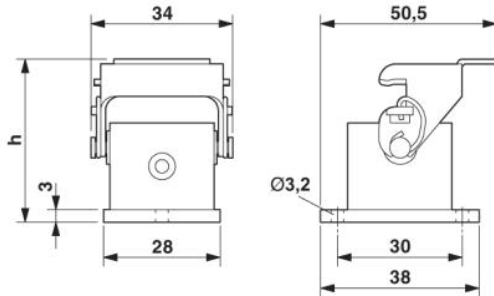

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2008 Phoenix Contact  
Technical modifications reserved;