

HC-D 7-TFL-57/M1PG11G

Order No.: 1773048

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1773048>

Sleeve housing, for single locking latch, height 57 mm, with screw connection, 1 x Pg11, straight cable entry, material zinc

| Commercial data | |
|--------------------------|--------------------|
| EAN | 4017918122317 |
| Pack | 10 Pcs. |
| Customs tariff | 76169910 |
| Weight/Piece | 0.08027 KG |
| Catalog page information | Page 422 (PC-2007) |

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| General data | |
|--------------|---------------------------------------|
| Note | For contact inserts HC-D7, D8, A3, A4 |
| Design | D7 |
| Height | 57 mm |
| Width | 28 mm |

| | |
|---------------------------------|--------------------------------|
| Length | 26.5 mm |
| Housing type | Sleeve housings |
| Locking type | for single locking latch |
| Type of the screw connection | 1x Pg11 |
| Pg screw connection | With |
| Wrench size, union nut | 18 mm |
| Cable exit | Straight |
| External cable diameter | 7.5 mm ... 12.5 mm |
| Degree of protection | IP54 / IP65 with sealing screw |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | see above |
| Housing surface material | Powder-coated, gray |
| Screw connection material | Nickel-plated brass |
| Cable seal material | NBR |

Certificates / Approvals

Approval logo



requested approbations

| | |
|---------------|------|
| Certification | GOST |
|---------------|------|

Accessories


| Item | Designation | Description |
|------|-------------|-------------|
|------|-------------|-------------|

Assembly

| | | |
|---------|----------------|------------------------------------|
| 1686229 | HC-D 7-DS-IP65 | Sealing screw, for IP65 protection |
|---------|----------------|------------------------------------|

Drawings

Dimensioned drawing

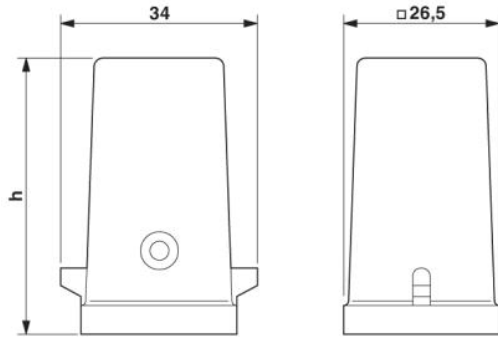

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2008 Phoenix Contact
Technical modifications reserved;