

HC-B 32-TFQ-80/M1PG29S

Order No.: 1775664

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1775664>

Sleeve housing, for double locking latch, height 80 mm, with screw connection, 1x Pg29, lateral cable entry

Commercial data	
EAN	4017918038236
Pack	10 Pcs.
Customs tariff	76169910
Weight/Piece	0.47494 KG
Catalog page information	Page 418 (PC-2007)

Product notesWEEE/RoHS-compliant since:
02/17/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General data	
Note	For contact inserts HC-B32, DD144, M
Design	B32
Height	80 mm
Width	79 mm

Length	94 mm
Housing type	Sleeve housings
Locking type	For double locking latch
Type of the screw connection	1x Pg29
Pg screw connection	With
Wrench size, union nut	37 mm
Cable exit	Lateral
External cable diameter	18 mm ... 27 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Screw connection material	Nickel-plated brass
Cable seal material	NBR

Certificates / Approvals

Approval logo




requested approbations

Certification	GOST
---------------	------

Drawings

Dimensioned drawing

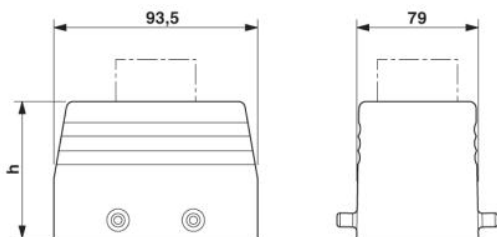

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2008 Phoenix Contact
Technical modifications reserved;