

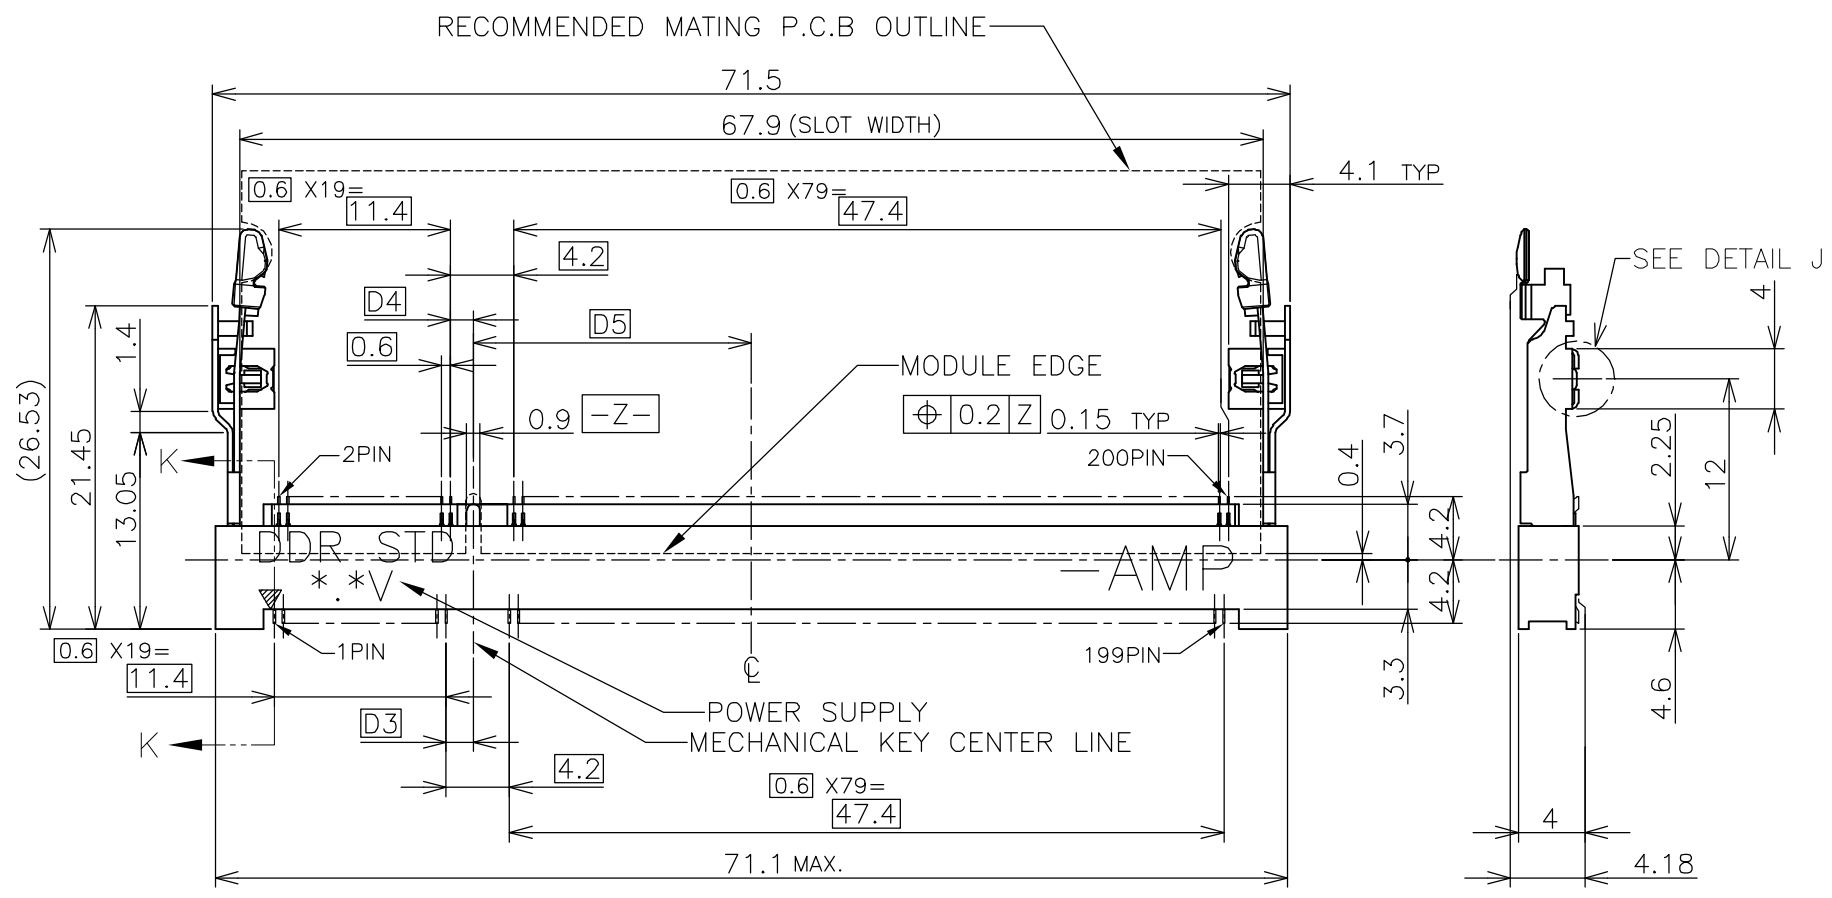
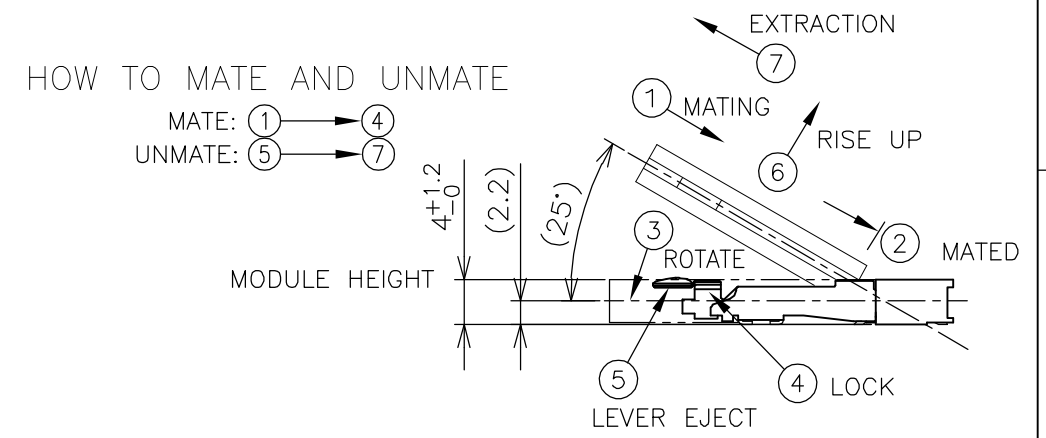
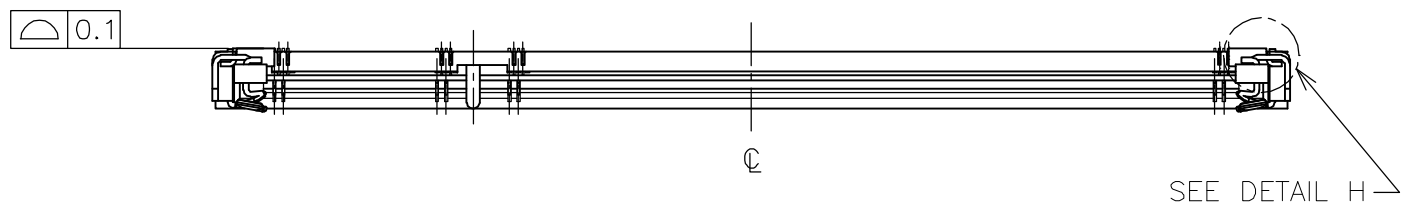
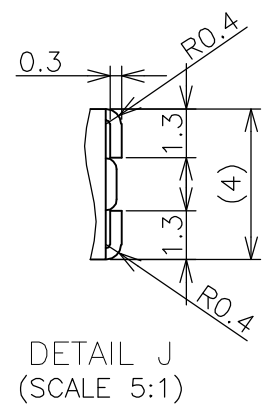


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION OCT ,2001.
 © COPYRIGHT 2001 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	B	REVISED (ECR-06-024642)		17OCT06	S.Y	S.Y	

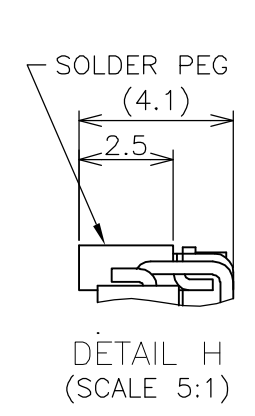




- (APPLIED TO SHEET 1-2)
- MATERIAL ; HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0
 CONTACT: COPPER ARROY
 LOCK LEVER STAINLESS STEEL
 SOLDER PEG: COPPER ARROY
 - FINISH ; CONTACT AREA: GOLD FLASH ON 0.0013MIN ALL OVER NICKEL.
 SOLDERING AREA: GOLD FLASH PLT.
 SOLDER PEG: TIN PLATING.
- ⚠ MECHANICAL KEY POSITION OF CONNECTOR SEE TABLE.
 ⚠ TOLERANCES NON-CUMULATIVE.
 ⚠ NOT TO SCALE.
- INSIDE MUST BE RESIST COAT EXCEPT SOLDER PATTERN.
 - IF THE MODULE DOESN'T INSERT AND LOCK IN THE LATCH SMOOTHLY, OPEN WIDE BOTH LATCHES BY MANUAL. AND THE MODULE MUST BE INSERTED AND LOCKED IN THE LATCH.

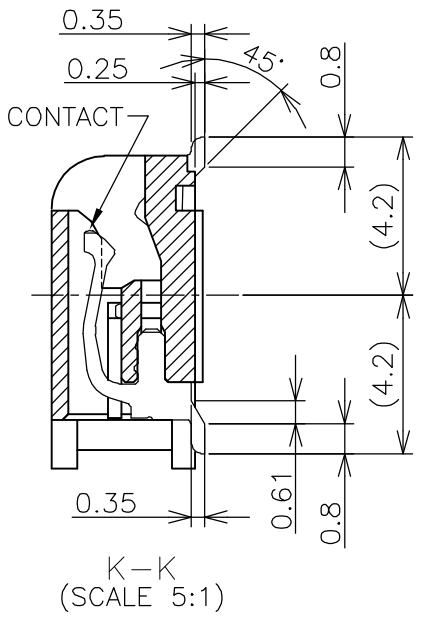





AVAILABLE	BOSSLESS	2.5V (DDR1)	18.45	1.5	1.8	200	1-1827963-3
TOOLING STATUS	REMARK	POWER SUPPLY (TYPE)	D5	D4	D3	POS	PART NO.
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LEO ZHOU 28MAR05	Tyco Electronics AMP K.K. Kawasaki, Japan				
DIMENSIONS: MM		CHK T.KAWAMAE 28MAR05					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD I.ENOMOTO 28MAR05					
0 PLC ± 0.3		NAME	DDR1 & DDR2 SODIMM SOCKET				
1 PLC ± 0.3		PRODUCT SPEC	0.6mm PITCH 200POS				
2 PLC ± 0.3		108-5701	LOW PROFILE STANDARD TYPE				
3 PLC ± 0.3		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
4 PLC ± 0.3		WEIGHT	A3	00779	C-1827963	-	
ANGLES ± 3'		CUSTOMER DRAWING	SCALE 2:1		SHEET 1 OF 4	REV B	

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION OCT., 2001.
 © COPYRIGHT 2001 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
J		SEE SHEET 1	-	-	-	

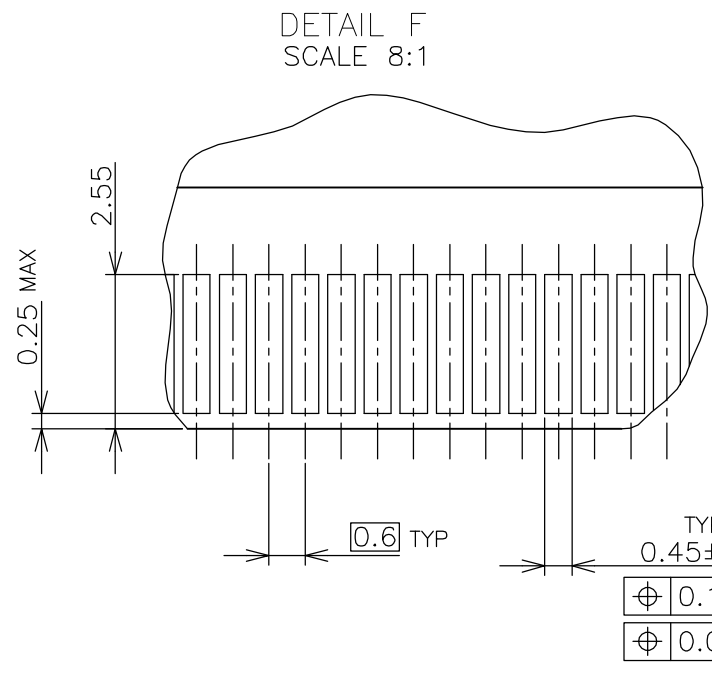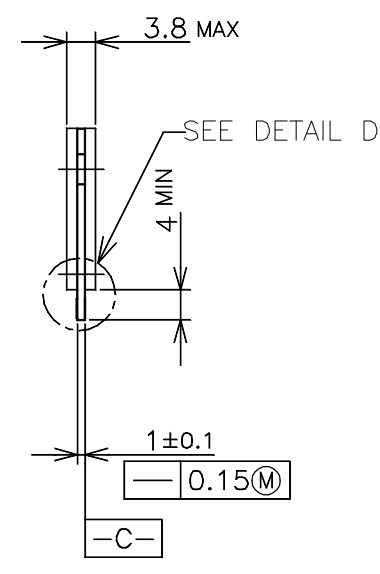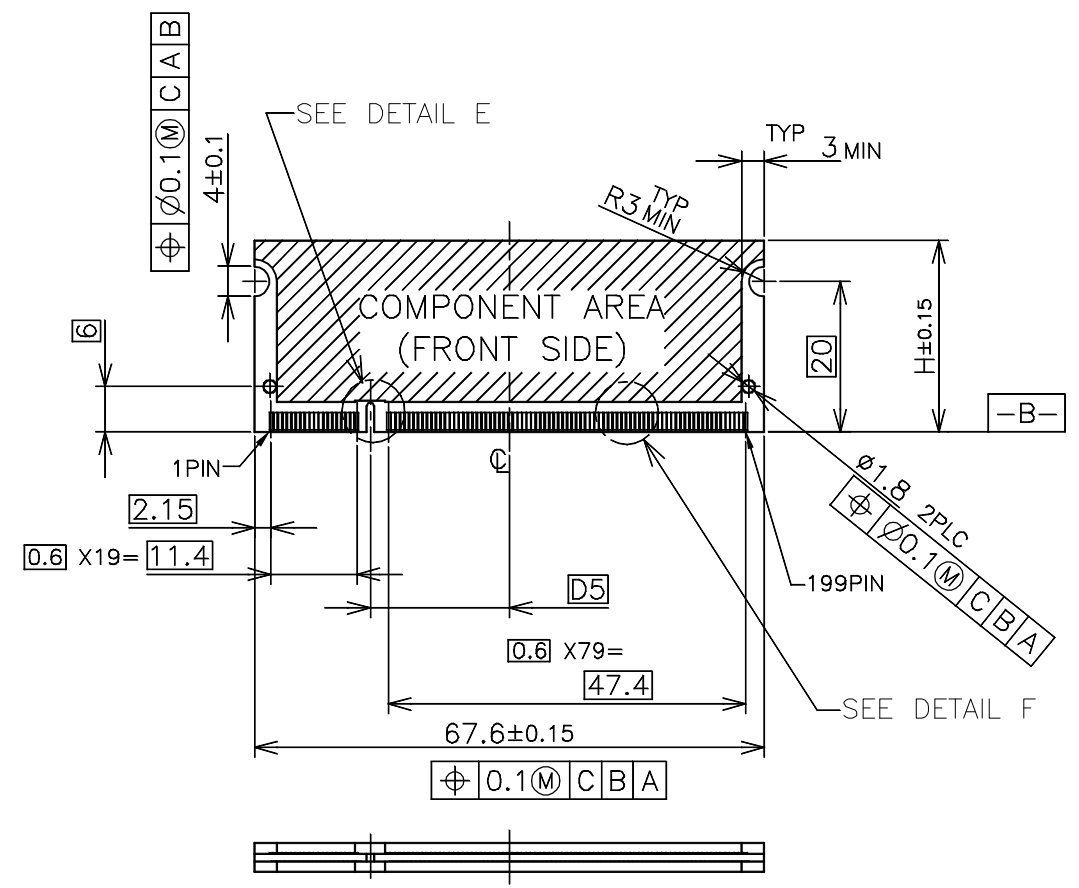

- (APPLIED TO SHEET 3)
1. TOLERANCES ON ALL DIMENSIONS ±0.15 UNLESS OTHERWISE SPECIFIED.
 2. P.C.BOARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.
 3. FINISH OF PAD : GOLD PLATING 0.00076 MIN. OVER Ni PLATING 0.002MIN.
- △ NO BURR
 ▽ CHAMFER 0.25 MAX x 45° IF EXIST.

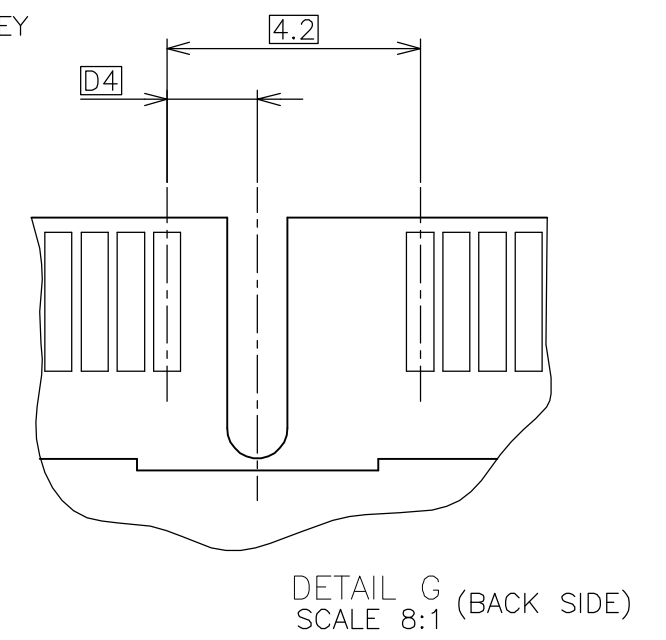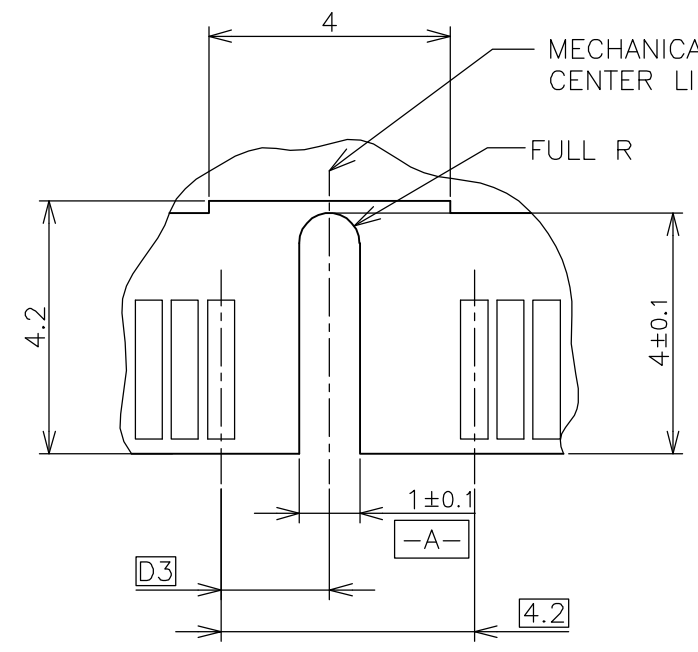
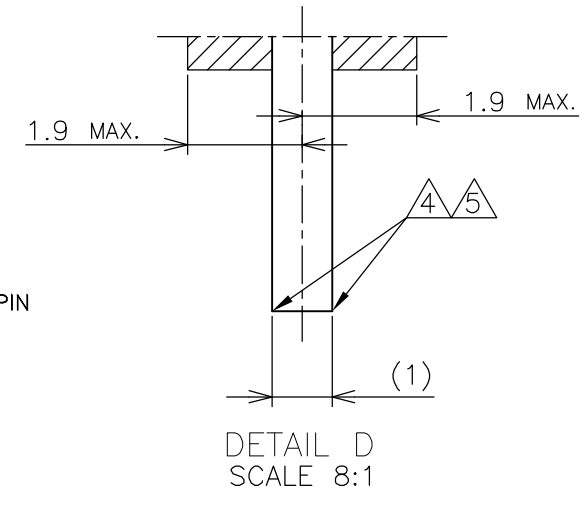
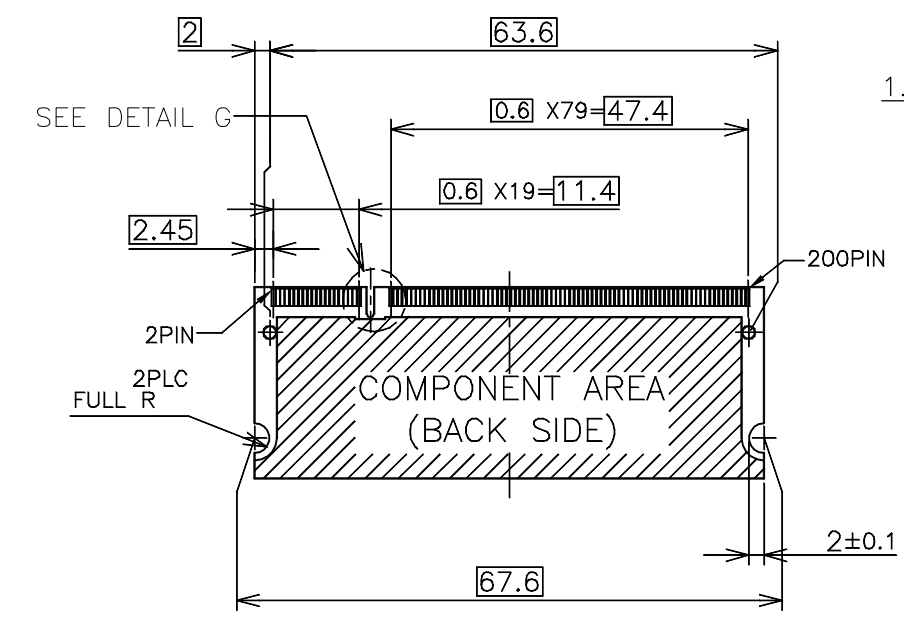


RECOMMENDED MATING P.C.B CONFIGURATION


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	25.4	2.5V	18.45	1.5	1.8
DIMENSIONS: MM		CHK	H	POWER SUPPLY	D5	D4	D3
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	Tyco Electronics AMP K.K. Kawasaki, Japan				
0 PLC ±		PRODUCT SPEC	NAME				
1 PLC ±		APPLICATION SPEC	DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH 200POS LOW PROFILE STANDARD TYPE				
2 PLC ±		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
3 PLC ±		CUSTOMER DRAWING	A3	00779	C-1827963	-	
4 PLC ±			SCALE	SHEET	OF	REV	
ANGLES ±			2:1	3	4	B	
FINISH							

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION OCT ,2001.
 © COPYRIGHT 2001 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1	-	-	-

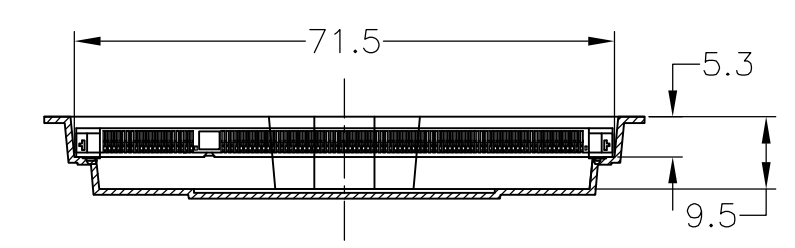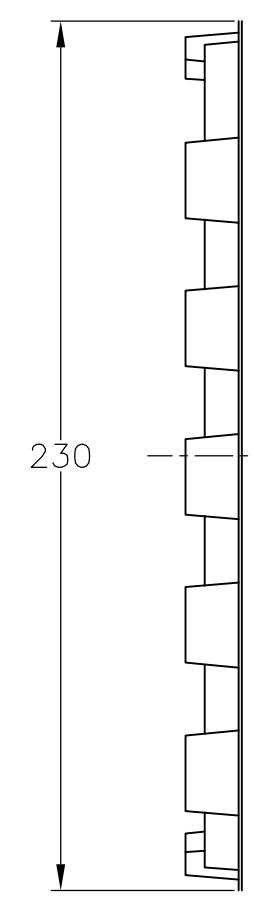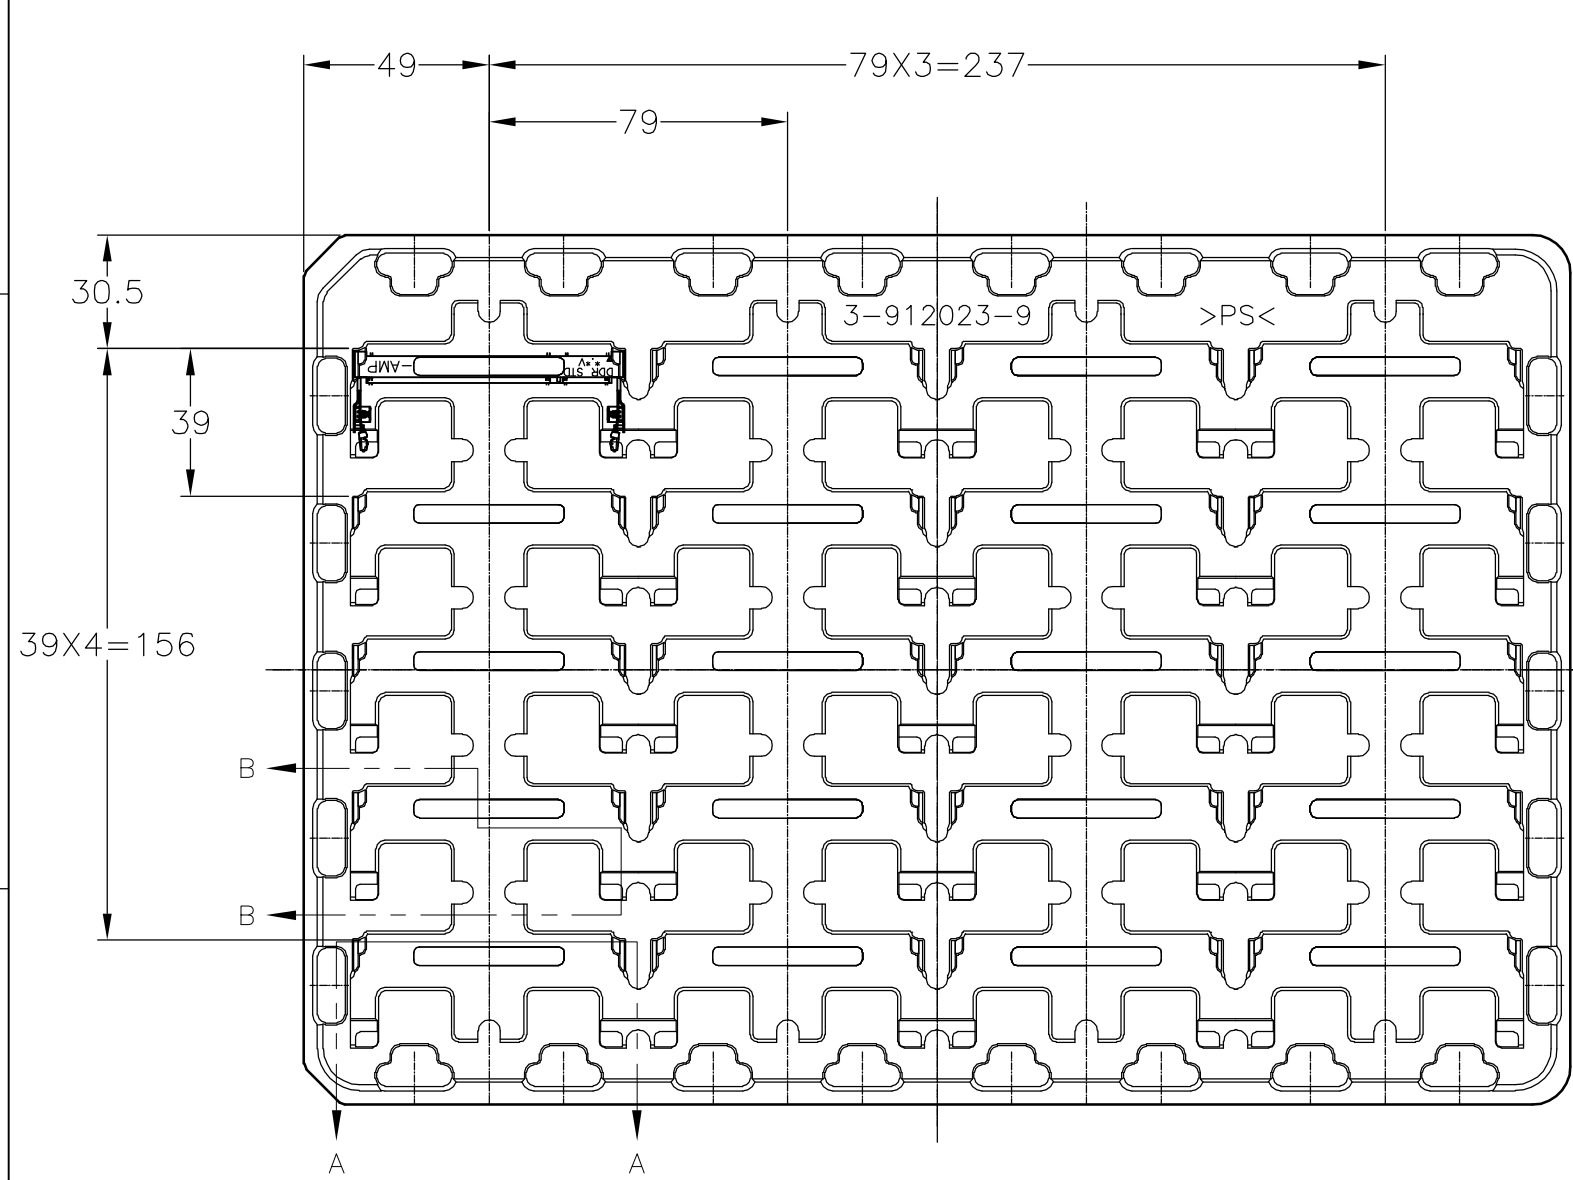

A-A
SCALE 2:1
(180DEG. ROTATE)

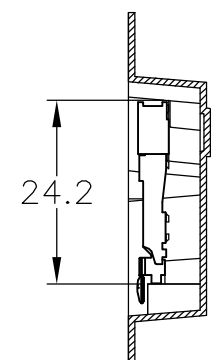

B-B
SCALE 2:1

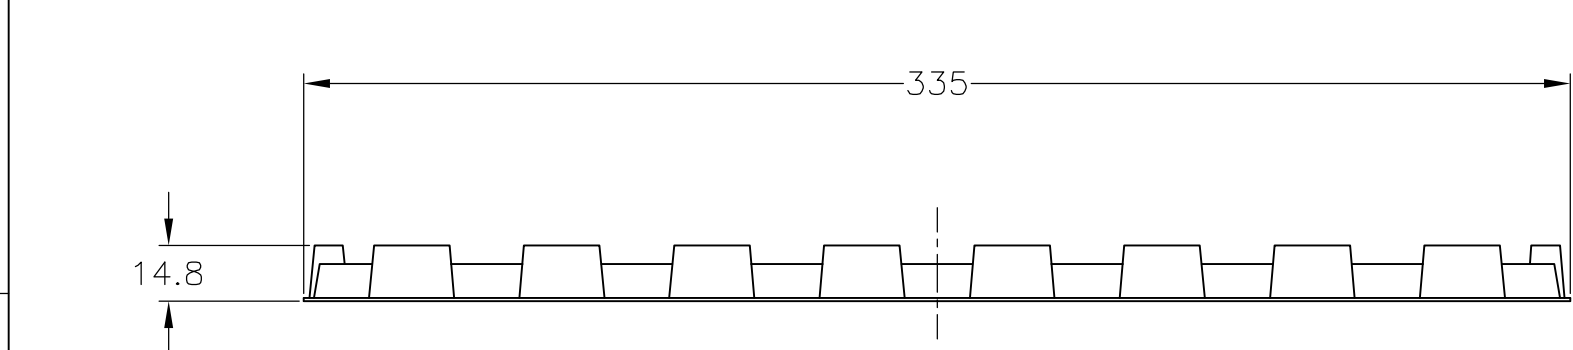

2.5V (DDR1)	20EA/TRAY	1-1827963-3
POWER SUPPLY (TYPE)	QTY	P/N

- (APPLIED TO SHEET 4)
- 1 THE DIRECTION OF EACH CONNECTOR ON A TRAY IS REFERRED TO THIS DRAWING.
 - 2 GENERAL TOLERANCE: ±0.5

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Tyco Electronics AMP K.K. Kawasaki, Japan		
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME		
0 PLC ± 0.3		PRODUCT SPEC	DDR1 & DDR2 SODIMM SOCKET		
1 PLC ± 0.3		APPLICATION SPEC	0.6mm PITCH 200POS		
2 PLC ± 0.3		WEIGHT	LOW PROFILE STANDARD TYPE		
3 PLC ± 0.3		CUSTOMER DRAWING	SIZE	CAGE CODE	DRAWING NO
4 PLC ± 0.3			A3	00779	C-1827963
ANGLES ± 3'			RESTRICTED TO		
FINISH			-		
		SCALE	SHEET		REV
		1:2	4 OF 4		B