



The CCM03 Series SIM/SAM Card Connector features an integrated card detection switch. This connector provides a competitive advantage to smart card reader device manufacturers by minimizing the space usage on the PCB, and features a side entry to offer convenient card access without opening the device. The unique design of this compact-size connector makes it ideal for telecommunications, portable electronics, POS terminals and similar applications, and meets GSM 11-11 specifications.

Features

- Unique card-guiding design.
- 6 spoon-shaped, gold-alloyed contacts resist wear and improve connectivity.
- Sealed card detection switches reduce connectivity problems caused by dust or moisture.
- Switch design detects and holds the card while providing firm contact.
- Unique side entry design offers card access without opening the device.
- Stainless steel cover and UL 94V-0 high-temperature thermoplastic insulator.

Construction	
Insulator	High temperature thermoplastic UL 94V-0
Contacts	Copper Alloy
Contact finish	Gold Alloy Inlay
PC Tail plating	Tin lead (2 µm min)

Mechanical Data	
Mechanical life	10,000 cycles minimum
Contact force	0.25 N min / 0.5 N max

Contact Electrical Data	
Insulation resistance	1000 MΩ min
Resistance	100 mΩ max
Current rating	10 µA min / 1 A max
Dielectric strength	500 Vrms min

Switch Electrical Data	
Card detection switch	Normally open
Contact resistance	100 mΩ max
Dielectric strength	250 Vrms min
Current rating	1 mA min / 10 mA max
Maximum power	0.2 VA

Environmental Data	
Operating temperature	-40°C to +85°C
Soldering temperature	Temperature/time profile acc. to CECC00802 para. 6.1, Fig. 3 with peak temperature
Salt mist	IEC 512 test number 11f (96 hours)
Damp heat	IEC 512 test number 11c (10 days)

Ordering Code			
Part Number	Number of contacts	Cover	Quantity per reel
CCM03-3752 R102	6	Without chamfer	1000
CCM03-3754 R102	6	With chamfer	1000


Other versions without cover, without switch, with ground terminals, contact your local Cannon Customer Service Center.

Packaging

5 reels per box.

CCM03 MK III

Dimensional Drawings

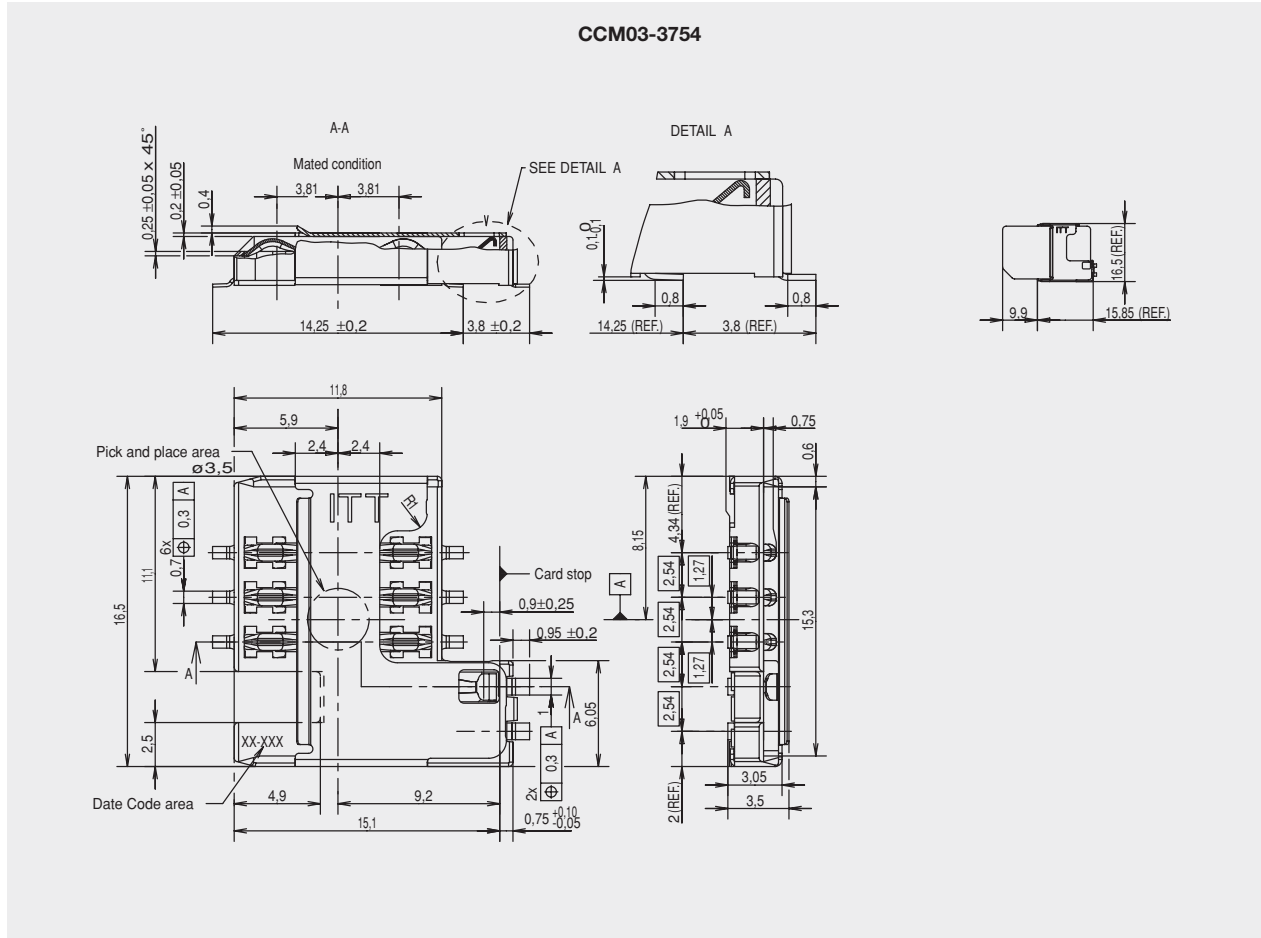

PCB Layout

