


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

FCI


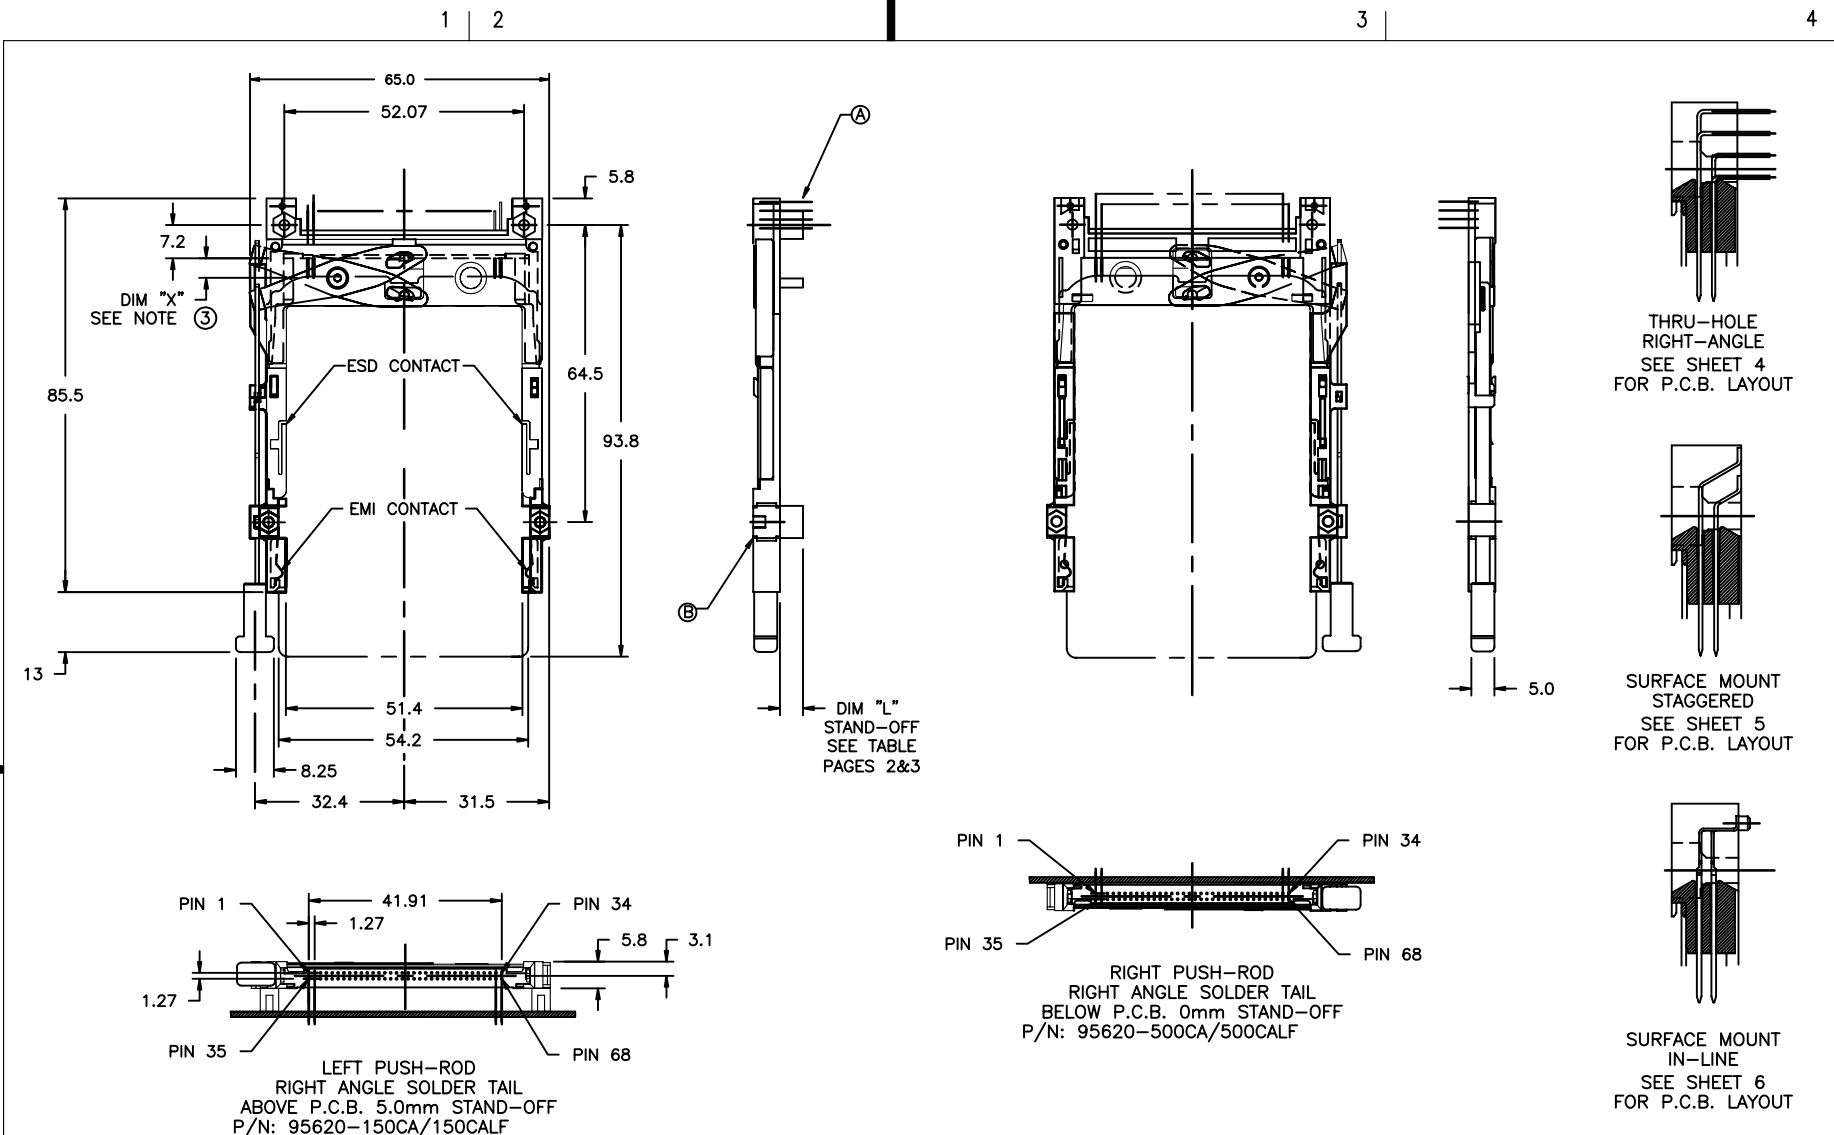


NOTES:

- REFER TO HEADER DRAWING 92140 AND EJECT MECHANISM 95079 FOR ADDITIONAL DIMENSIONS, MATERIAL, AND PLATING INFORMATION.

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		Electronics www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X±.3				projection	title	
L	V20418	LP	3/1/02		.XX±.13					5V EJECT HEADER ASSY	
M	N05-0054	WB	03/01/05	angles	.XXX±.051					product family	
					0° ±2'					MCS	
				dr	D.SHEAFFER	11/17/94	← MM →		size		
				enr	D.BRANN	12/7/94	scale		A4		
				chr	D.BRANN	12/7/94	1:1		95620		
				appd	D.BRANN	12/7/94			sheet		
sheet index	revision sheet	M	M	M	M	M	M	M	M	1 of 9	
		1	2	3	4	5	6	7	8	9	

DESCRIPTION: ABOVE P.C.B., DECK AND PUSH-ROD LOCATION ARE AS VIEWED BY USER.

PRODUCT NO. 95620-XXXXX	PUSH ROD LOCATION	SOLDER TAIL ⑤	STAND-OFF HEIGHT DIM "L"	EJ. HEADER ASSY 92140-XXX ①	EJ. MECHANISM ASSY 95079-XXXX ②	SOLDERABLE HOLD DOWN (4) ③	MOUNTING STYLE TO PCB AND PUSH-ROD LOCATION	USED WITH/COMMENTS	
000CA	RIGHT	R/A	0.0	000	00CA				
000CAH ⑦	RIGHT	R/A	0.0	000	00CA	93925-001			
001CA	RIGHT	SMT-STG	0.0	001	00CA				
002CA	RIGHT	SMT-IL	0.0	002	00CA				
020CA	RIGHT	R/A	2.0	040	02CA				
040CA	RIGHT	R/A	4.0	010	04CA				
050CA	RIGHT	R/A	5.0	020	05CA				
050CAH ⑦	RIGHT	R/A	5.0	020	05CA	93925-004			
100CA	LEFT	R/A	0.0	000	10CA				
100CAH ⑦	LEFT	R/A	0.0	000	10CA	93925-001			
101CA	LEFT	SMT-STG	0.0	001	10CA				
102CA	LEFT	SMT-IL	0.0	002	10CA				
120CA	LEFT	R/A	2.0	040	12CA				
140CA	LEFT	R/A	4.0	010	14CA				
150CA	LEFT	R/A	5.0	020	15CA				
005CA	RIGHT	R/A	0.0	005	00CA				95620-000CA or -100CA
025CA	RIGHT	R/A	0.0	045	00CA				95620-020CA or -120CA
105CA	LEFT	R/A	0.0	005	10CA				95620-000CA or -100CA
125CA	LEFT	R/A	0.0	045	10CA			95620-020CA or -120CA	

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

FCI

B

A

B

NOTES:

- MATERIAL:
 - 1.1 HEADER ASSY:
 - PLASTIC HOUSING: LCP UL94V-0 BLACK - ABOVE PCB
 - LCP UL94V-0 NATURAL (WHITE) - BELOW PCB
 - PIN: PHOSPHOR BRONZE
 - 1.2 EJECT MECHANISM ASSY:
 - PLASTIC GUIDE: POLYPHTHARAMID UL94V-0 BLACK
 - PLASTIC PUSH-ROD BUTTON: POLYPHTHARAMID UL94V-0 BLACK
 - COVER PLATE, EJECT PLATE, LINK ARM,
 - PUSH ROD: STAINLESS STEEL
 - EMI CONTACT: PHOSPHOR BRONZE
- FINISH (PIN)
 - UNDER PLATING: 0.5um Ni
 - CONTACT AREA: 0.1um GOLD OVER
 - 0.5um Pd-Ni
 - SOLDER TAIL: 2.5um Sn-Pb

③ DIM "X"


4.25±.1	3.5±.1	5.0±.1
OTHERS	36,67	1,17,34,35,51,68



- RECOMMENDED HOLD DOWN - 2mm SCREWS (95121-XXX)AND HEXNUTS (92869-001). RECOMMENDED SCREW TORQUE: 1.0 TO 1.5 MAX in-lbs. (1.2-1.7 cm-kgs).

- ⑤ SOLDER TAIL KEY/PCB LAYOUT:
 R/A = RIGHT ANGLE PIN-THROUGH-HOLE-PAGE 6
 SMT-STG = STAGGERED SURFACE MOUNT-PAGE 7
 SMT-IL = SURFACE MOUNT IN-LINE (SINGLE ROW)-PAGE 8

6. BOARD KEEP OUT ZONE- PAGE 9

- ⑦ SOLDERABLE HOLD DOWN

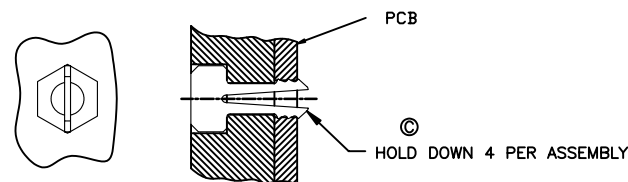

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com			
ltr	ecn no	dr	date	linear	.X±.3	projection		title			
M					.XX±.13			5V EJECT HEADER ASSY		product family	MCS
					.XXX±.051			size	dwg no	code	-
				angles	0' ±2'	scale	1:1	A4	95620		
				dr	G.CLEMENS	12/20/99					
				enr	D.BRANN	12/20/99					
				chr	D.BRANN	12/20/99					
				appd	D.BRANN	12/20/99					
sheet index	revision sheet										

DESCRIPTION: ABOVE P.C.B., DECK AND PUSH-ROD LOCATION ARE AS VIEWED BY USER.


PRODUCT NO. 95620-XXXXX	PUSH ROD LOCATION	SOLDER TAIL ⑤	STAND-OFF HEIGHT DIM "L"	EJ. HEADER ASSY 92140-XXX ①	EJ. MECHANISM ASSY 95079-XXXX ②	SOLDERABLE HOLD DOWN (4) ③	MOUNTING STYLE TO PCB AND PUSH-ROD LOCATION	USED WITH/COMMENTS
000CALF	RIGHT	R/A	0.0	000LF	00CA			
000CAHLF ⑩	RIGHT	R/A	0.0	000LF	00CA	93925-001		
001CALF	RIGHT	SMT-STG	0.0	001LF	00CA			
002CALF	RIGHT	SMT-IL	0.0	002LF	00CA			
020CALF	RIGHT	R/A	2.0	040LF	02CA			
040CALF	RIGHT	R/A	4.0	010LF	04CA			
050CALF	RIGHT	R/A	5.0	020LF	05CA			
050CAHLF ⑩	RIGHT	R/A	5.0	020LF	05CA	93925-004		
100CALF	LEFT	R/A	0.0	000LF	10CA			
100CAHLF ⑩	LEFT	R/A	0.0	000LF	10CA	93925-001		
101CALF	LEFT	SMT-STG	0.0	001LF	10CA			
102CALF	LEFT	SMT-IL	0.0	002LF	10CA			
120CALF	LEFT	R/A	2.0	040LF	12CA			
140CALF	LEFT	R/A	4.0	010LF	14CA			
150CALF	LEFT	R/A	5.0	020LF	15CA			
005CALF	RIGHT	R/A	0.0	005LF	00CA			95620-000CALF or -100CALF
025CALF	RIGHT	R/A	0.0	045LF	00CA			95620-020CALF or -120CALF
105CALF	LEFT	R/A	0.0	005LF	10CA			95620-000CALF or -100CALF
125CALF	LEFT	R/A	0.0	045LF	10CA			95620-020CALF or -120CALF

NOTES:

- MATERIAL:
 - 1.1 HEADER ASSY:
 - PLASTIC HOUSING: LCP UL94V-0 BLACK - ABOVE PCB
 - LCP UL94V-0 NATURAL (WHITE) - BELOW PCB
 - PIN: PHOSPHOR BRONZE
 - 1.2 EJECT MECHANISM ASSY:
 - PLASTIC GUIDE: POLYPHTHARAMID UL94V-0 BLACK
 - PLASTIC PUSH-ROD BUTTON: POLYPHTHARAMID UL94V-0 BLACK
 - COVER PLATE, EJECT PLATE, LINK ARM,
 - PUSH ROD: STAINLESS STEEL
 - EMI CONTACT: PHOSPHOR BRONZE
 - FINISH (PIN)
 - UNDER PLATING: 0.5um Ni
 - CONTACT AREA: 0.1um GOLD OVER
 - 0.5um Pd-Ni
 - 2.5um Sn-Pb
- | | | | |
|------------------|---------|------------------|--------|
| ③ SOLDER DIM "X" | 4.25±.1 | 3.5±.1 | 5.0±.1 |
| OTHERS | 36,67 | 1,17,34,35,51,68 | |
- RECOMMENDED HOLD DOWN - 2mm SCREWS (95121-XXX) AND HEXNUTS (92869-001). RECOMMENDED SCREW TORQUE: 1.0 TO 1.5 MAX in-lbs. (1.2-1.7 cm-kgs).
 - SOLDER TAIL KEY/PCB LAYOUT:
 - R/A = RIGHT ANGLE PIN-THROUGH-HOLE-PAGE 6
 - SMT-STG = STAGGERED SURFACE MOUNT-PAGE 7
 - SMT-IL = SURFACE MOUNT IN-LINE (SINGLE ROW)-PAGE 8
 - IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
 SOLDER TAIL : SMT-IL, SMT-STG CAN RESIST 40 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
 SOLDER TAIL : R/A CAN RESIST 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
 - IF LEAD FREE P/N.THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DISCRIBLED IN GS-22-008
 - LEAD FREE P/N PACKAGING MEETS GS-14-920 SPECIFICATION

9. BOARD KEEP OUT ZONE- PAGE 9

⑩ SOLDERABLE HOLD DOWN

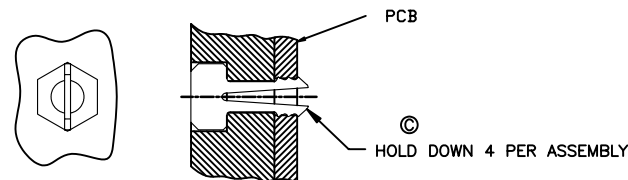

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY	FCI Electronics www.fciconnect.com	
ltr	ecn no	dr	date	linear	projection	title
M				.X±.3		5V EJECT HEADER ASSY
				.XX±.13		
				angles	MM	product family MCS
				0' ±2'		
				dr	scale	size dwg no
				G.CLEMENS 12/20/99		
				enr D.BRANN 12/20/99		
				chr D.BRANN 12/20/99		
				appd D.BRANN 12/20/99	1:1	A4
sheet index	revision sheet					sheet 3 of



Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

B

DESCRIPTION: BELOW P.C.B., DECK AND PUSH-ROD LOCATION ARE AS VIEWED BY USER.

PRODUCT NO. 95620-XXXX	PUSH ROD LOCATION	SOLDER TAIL ⑤	STAND-OFF HEIGHT DIM "L"	EJ. HEADER ASSY 92140-XXX ①	EJ. MECHANISM ASSY 95079-XXXX ②	SOLDERABLE HOLD DOWN (4) ③	MOUNTING STYLE TO PCB AND PUSH-ROD LOCATION	USED WITH/COMMENTS	
500CA	RIGHT	R/A	0.0	500	10CA				
500CAH	RIGHT	R/A	0.0	500	10CA	93925-001			
501CA	RIGHT	SMT-STG	0.0	501	10CA				
502CA	RIGHT	SMT-IL	0.0	502	10CA				
503CA	RIGHT	SMT-IL	0.0	503	10CA			NO BOARD LOCATORS	
520CA	RIGHT	R/A	2.0	540	12CA				
540CA	RIGHT	R/A	4.0	510	14CA				
550CA	RIGHT	R/A	5.0	520	15CA				
600CA	LEFT	R/A	0.0	500	00CA				
601CA	LEFT	SMT-STG	0.0	501	00CA				
602CA	LEFT	SMT-IL	0.0	502	00CA				
620CA	LEFT	R/A	2.0	540	02CA				
640CA	LEFT	R/A	4.0	510	04CA				
650CA	LEFT	R/A	5.0	520	05CA				
505CA	RIGHT	R/A	0.0	505	10CA				95620-500CA or -600CA
525CA	RIGHT	R/A	0.0	545	10CA				95620-520CA or -620CA
605CA	LEFT	R/A	0.0	505	00CA				95620-500CA or -600CA
625CA	LEFT	R/A	0.0	545	00CA				95620-520CA or -620CA

NOTES:

1. MATERIAL:
 1.1 HEADER ASSY:
 PLASTIC HOUSING: LCP UL94V-0 BLACK - ABOVE PCB
 LCP UL94V-0 NATURAL (WHITE) - BELOW PCB
 PIN: PHOSPHOR BRONZE

- 1.2 EJECT MECHANISM ASSY:
 PLASTIC GUIDE: POLYPHTHARAMID UL94V-0 BLACK
 PLASTIC PUSH-ROD BUTTON: POLYPHTHARAMID UL94V-0 BLACK
 COVER PLATE, EJECT PLATE, LINK ARM,
 PUSH ROD: STAINLESS STEEL
 EMI CONTACT: PHOSPHOR BRONZE

2. FINISH (PIN)
 UNDER PLATING: 0.5um Ni
 CONTACT AREA: 0.1um GOLD OVER
 0.5um Pd-Ni
 SOLDER TAIL: 2.5um Sn-Pb



③ DIM "X"

4.25±.1	3.5±.1	5.0±.1
OTHERS	36,67	1,17,34,35,51,68

4. RECOMMENDED HOLD DOWN - 2mm SCREWS (95121-XXX) AND HEXNUTS (92869-001). RECOMMENDED SCREW TORQUE: 1.0 TO 1.5 MAX in-lbs. (1.2-1.7 cm-kgs).

- ⑤ SOLDER TAIL KEY/PCB LAYOUT:
 R/A = RIGHT ANGLE PIN-THROUGH-HOLE-PAGE 6
 SMT-STG = STAGGERED SURFACE MOUNT-PAGE 7
 SMT-IL = SURFACE MOUNT IN-LINE (SINGLE ROW)-PAGE 8

6. BOARD KEEP OUT ZONE-PAGE 9

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		 FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X±.3	projection	title
M					.XX±.13		
				angles	.XXX±.051		5V EJECT HEADER ASSY
				dr	G.CLEMENS 12/20/99		
				enrg	D.BRANN 12/20/99	scale 1:1	product family size dwg no MCS 95620
				chr	D.BRANN 12/20/99		
				appd	D.BRANN 12/20/99	A4	4 of
sheet index	revision sheet						

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

DESCRIPTION: BELOW P.C.B., DECK AND PUSH-ROD LOCATION ARE AS VIEWED BY USER.

PRODUCT NO. 95620-XXXX	PUSH ROD LOCATION	SOLDER TAIL ⑤	STAND-OFF HEIGHT DIM "L"	EJ. HEADER ASSY 92140-XXX ①	EJ. MECHANISM ASSY 95079-XXXX ②	SOLDERABLE HOLD DOWN (4) ③	MOUNTING STYLE TO PCB AND PUSH-ROD LOCATION	USED WITH/COMMENTS
500CALF	RIGHT	R/A	0.0	500LF	10CA			
500CAHLF	RIGHT	R/A	0.0	500LF	10CA	93925-001		
501CALF	RIGHT	SMT-STG	0.0	501LF	10CA			
502CALF	RIGHT	SMT-IL	0.0	502LF	10CA			
503CALF	RIGHT	SMT-IL	0.0	503LF	10CA			
520CALF	RIGHT	R/A	2.0	540LF	12CA			
540CALF	RIGHT	R/A	4.0	510LF	14CA			
550CALF	RIGHT	R/A	5.0	520LF	15CA			
600CALF	LEFT	R/A	0.0	500LF	00CA			
601CALF	LEFT	SMT-STG	0.0	501LF	00CA			
602CALF	LEFT	SMT-IL	0.0	502LF	00CA			
620CALF	LEFT	R/A	2.0	540LF	02CA			
640CALF	LEFT	R/A	4.0	510LF	04CA			
650CALF	LEFT	R/A	5.0	520LF	05CA			
505CALF	RIGHT	R/A	0.0	505LF	10CA			95620-500CA or -600CA
525CALF	RIGHT	R/A	0.0	545LF	10CA			95620-520CA or -620CA
605CALF	LEFT	R/A	0.0	505LF	00CA			95620-500CA or -600CA
625CALF	LEFT	R/A	0.0	545LF	00CA			95620-520CA or -620CA

NOTES:

- MATERIAL:
 - HEADER ASSY:
 - PLASTIC HOUSING: LCP UL94V-0 BLACK - ABOVE PCB
 - LCP UL94V-0 NATURAL (WHITE) - BELOW PCB
 - PIN: PHOSPHOR BRONZE

- EJECT MECHANISM ASSY:
 - PLASTIC GUIDE: POLYPHTHARAMID UL94V-0 BLACK
 - PLASTIC PUSH-ROD BUTTON: POLYPHTHARAMID UL94V-0 BLACK
 - COVER PLATE, EJECT PLATE, LINK ARM,
 - PUSH ROD: STAINLESS STEEL
 - EMI CONTACT: PHOSPHOR BRONZE

- FINISH (PIN)
 - UNDER PLATING: 0.5um Ni
 - CONTACT AREA: 0.1um GOLD OVER
 - 0.5um Pd-Ni
 - SOLDER TAIL: 2.5um Sn-Pb

③ DIM "X"

4.25±.1	3.5±.1	5.0±.1
OTHERS	36,67	1,17,34,35,51,68

- RECOMMENDED HOLD DOWN - 2mm SCREWS (95121-XXX) AND HEXNUTS (92869-001). RECOMMENDED SCREW TORQUE: 1.0 TO 1.5 MAX in-lbs. (1.2-1.7 cm-kgs).

- SOLDER TAIL KEY/PCB LAYOUT:
 - R/A = RIGHT ANGLE PIN-THROUGH-HOLE-PAGE 6
 - SMT-STG = STAGGERED SURFACE MOUNT-PAGE 7
 - SMT-IL = SURFACE MOUNT IN-LINE (SINGLE ROW)-PAGE 8

- BOARD KEEP OUT ZONE-PAGE 9


- IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
- SOLDER TAIL : SMT-IL, SMT-STG CAN RESIST 40 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- SOLDER TAIL : R/A CAN RESIST 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
- IF LEAD FREE P/N.THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DISCRIBLED IN GS-22-008
- LEAD FREE P/N PACKAGING MEETS GS-14-920 SPECIFICATION

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		 FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X±.3	projection	title
M					.XX±.13		
				angles	.XXX±.051	 MM	5V EJECT HEADER ASSY
				dr	G.CLEMENS 12/20/99		
				enrg	D.BRANN 12/20/99	scale	product family MCS
				chr	D.BRANN 12/20/99		
				appd	D.BRANN 12/20/99	1:1	size
sheet index	revision sheet						dwg no
							95620
							sheet 5 of


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

Single Mount Right Angle

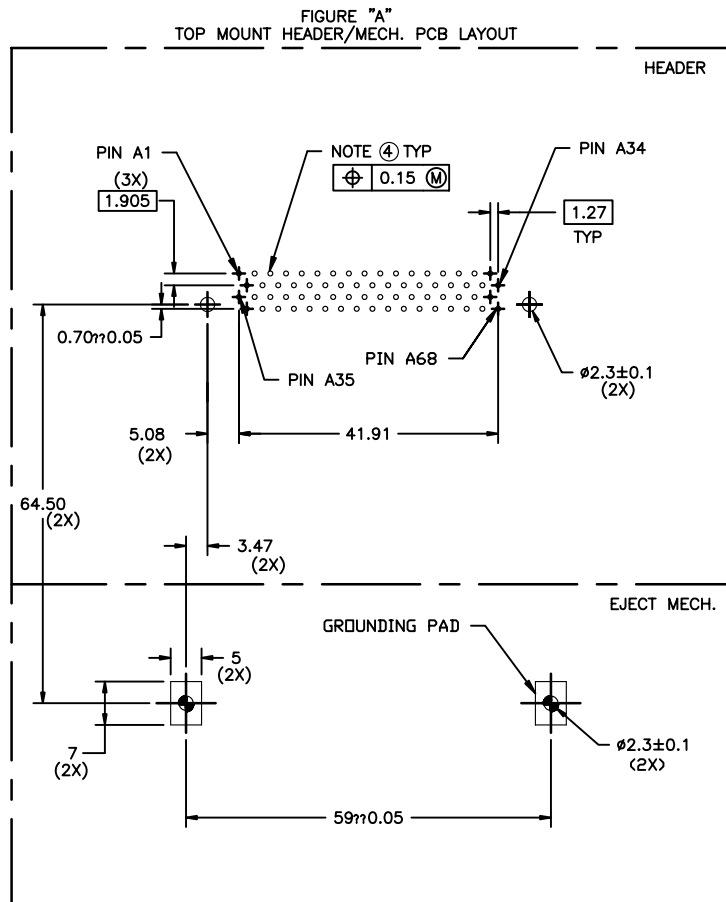

BOARD VIEW FROM CONNECTOR MOUNTED SIDE
TOP OF BOARD IN APPLICATION

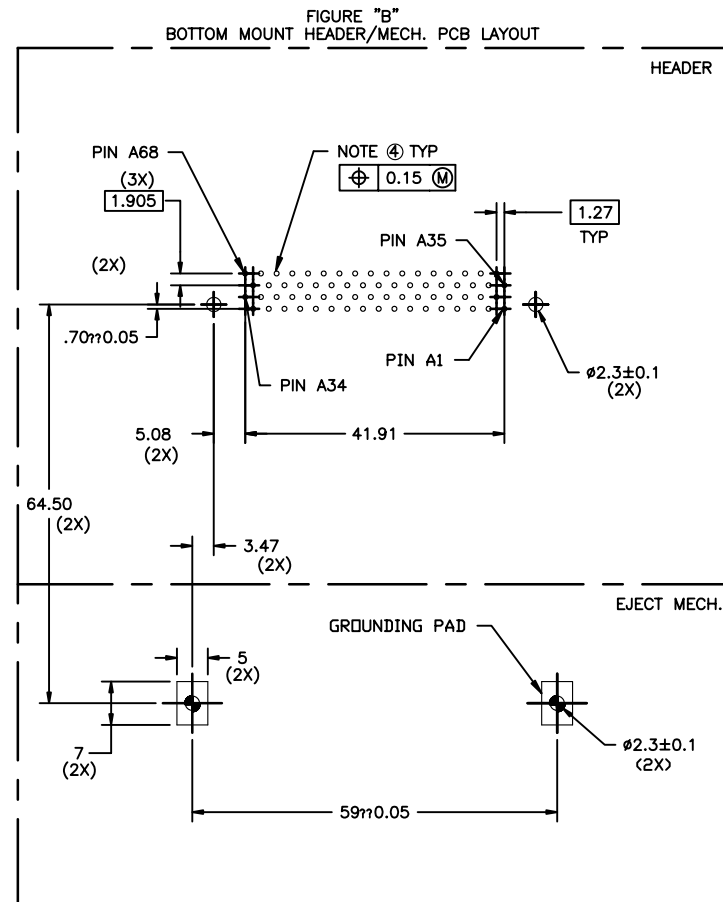

BOARD VIEW FROM CONNECTOR MOUNTED SIDE
BOTTOM OF BOARD IN APPLICATION

NOTES:

- 1 ALL TOLERANCES ± 0.15 UNLESS NOTED.
- 2 KEEP-OUT ZONE FOR HEADERS W\ STAND-OFF OPTIONS SEE SHEET 9 FIGURE A.
- 3 KEEP-OUT ZONE FOR HEADERS W\O STAND-OFF OPTIONS SEE SHEET 9 FIGURE B.
- ④ RECOMMENDED DIAMETER IS $\phi 1.0$. FOR PROCESSES USING PASTE REFLOW, HOLE MAY BE AS SMALL AS $\phi 0.79$


mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com		
ltr	ecn no	dr	date	linear	.X \pm .3	projection		title		
M					.XX \pm .13			5V EJECT HEADER ASSY		
					.XXX \pm .051			product family	MCS	code
				angles	0' \pm 2'	 MM	scale 1:1	size	dwg no	
				dr	G.CLEMENS			12/20/99	A4	95620
				enr	D.BRANN			12/20/99	sheet	
				chr	D.BRANN			12/20/99	6 of	
				appd	D.BRANN	12/20/99				
sheet index	revision sheet							cage code		

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.


Surface Mount 2-Row

FIGURE "A"
TOP MOUNT HEADER/MECH. PCB LAYOUT

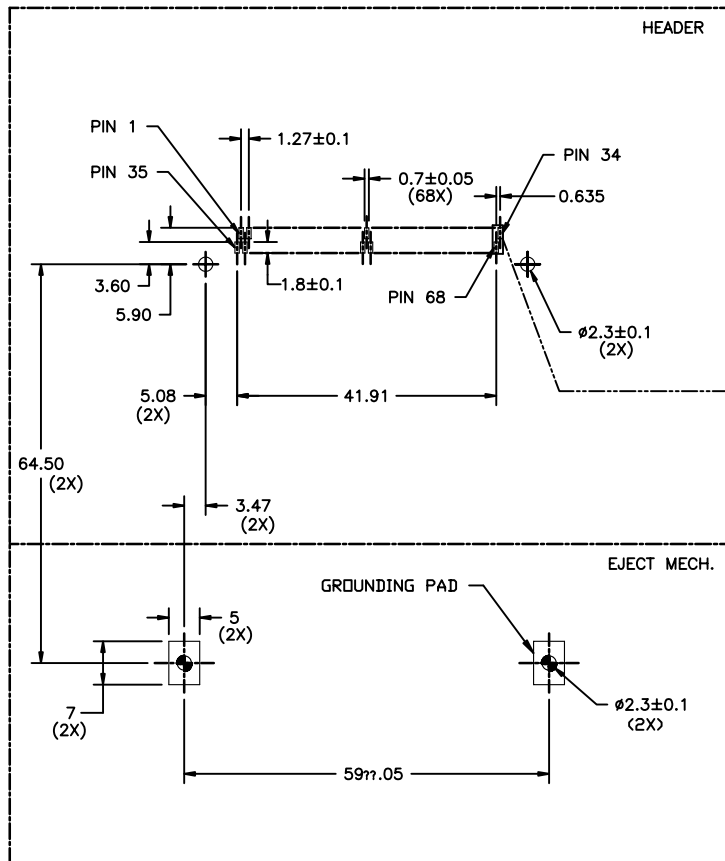

BOARD VIEW FROM CONNECTOR MOUNTED SIDE
TOP OF BOARD IN APPLICATION

FIGURE "B"
BOTTOM MOUNT HEADER/MECH. PCB LAYOUT

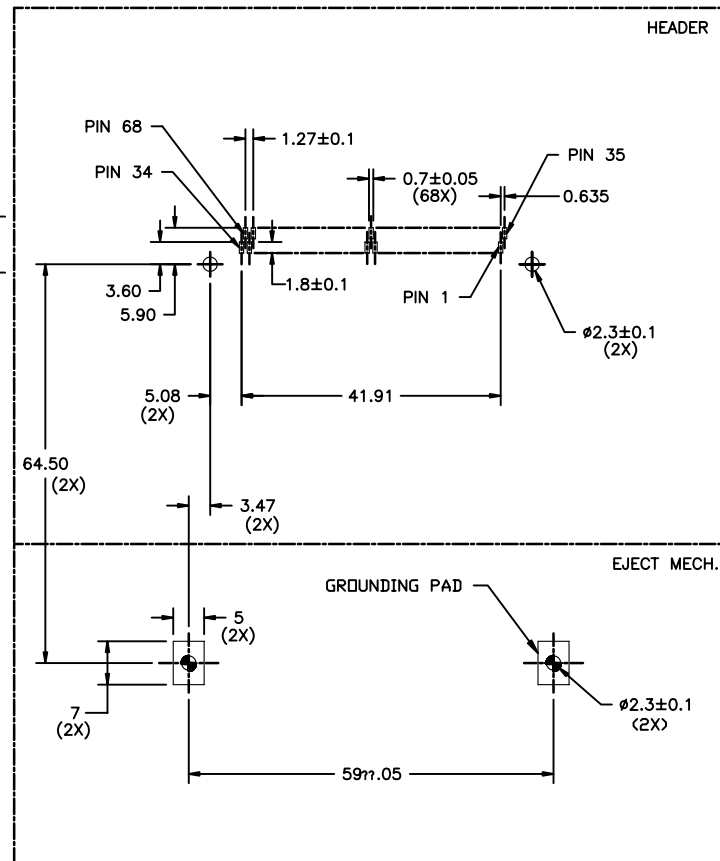

BOARD VIEW FROM CONNECTOR MOUNTED SIDE
BOTTOM OF BOARD IN APPLICATION

NOTES:

- 1 ALL TOLERANCES ± 0.15 UNLESS NOTED.
- 2 KEEP-OUT ZONE FOR ASSEMBLIES SHOWN ON SHEET 9 FIGURE B.


mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY	 FCI www.fciconnect.com			
ltr	ecn no	dr	date	linear	projection	 title		
M							.X \pm .3	5V EJECT HEADER ASSY
							.XX \pm .13	product family MCS
				angles	 scale	size dwg no A4 95620		
				dr			code	
				enr	MM	—		
				chr	1:1	sheet		
				appd		7 of		
sheet index	revision sheet							

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.


Surface Mount In-Line

FIGURE "A"
TOP MOUNT HEADER/MECH. PCB LAYOUT

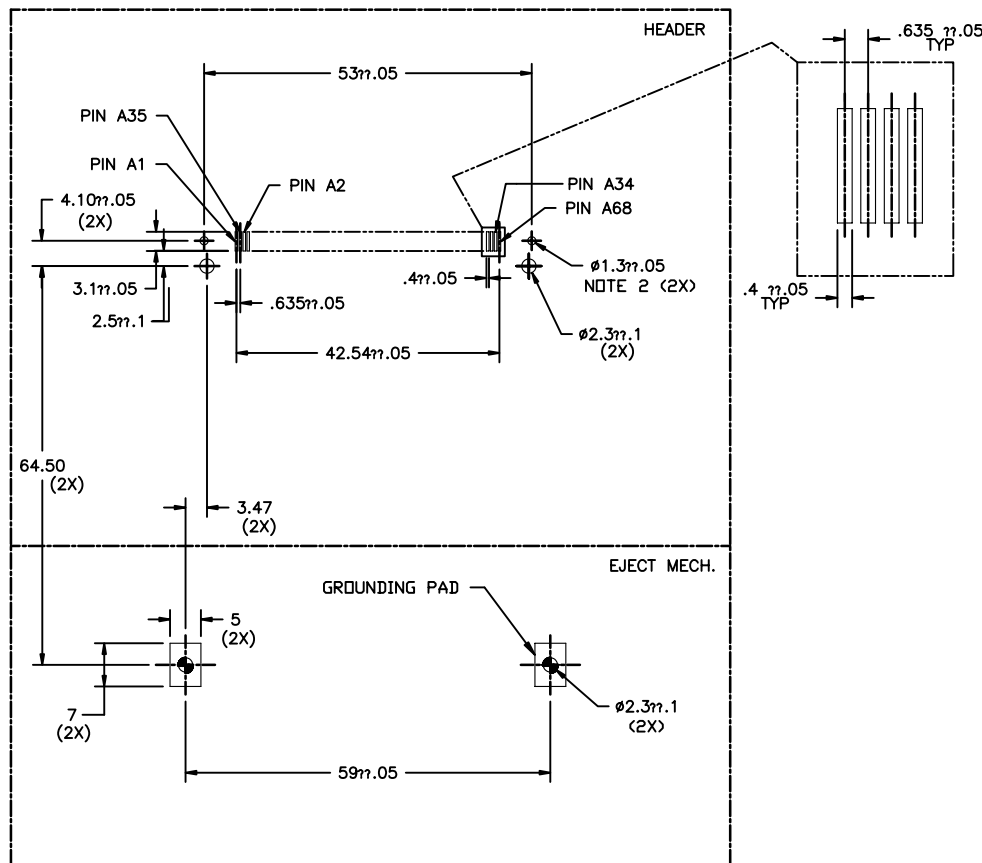

BOARD VIEW FROM CONNECTOR MOUNTED SIDE
TOP OF BOARD IN APPLICATION

FIGURE "B"
BOTTOM MOUNT HEADER/MECH. PCB LAYOUT

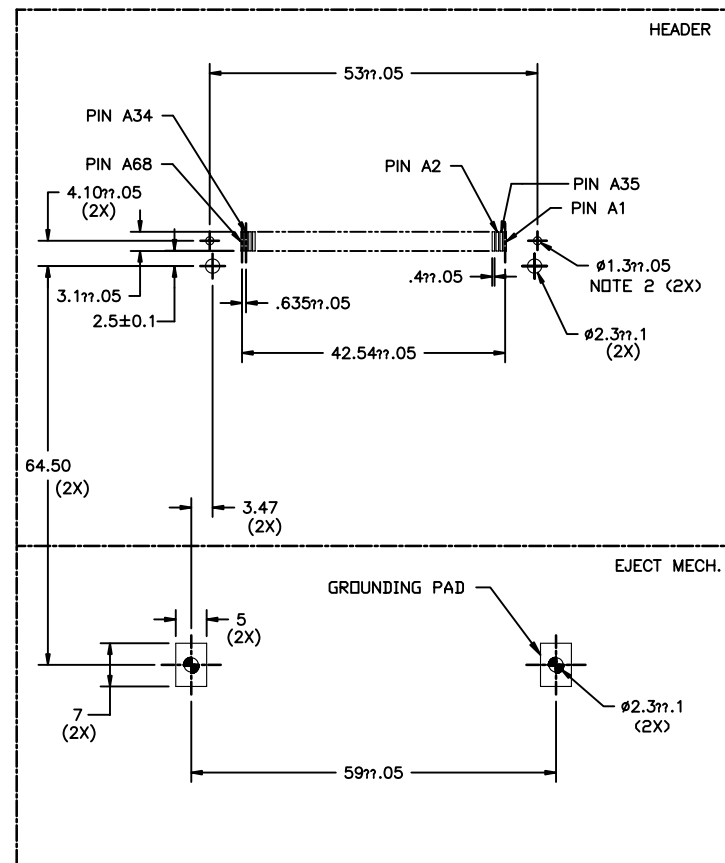

BOARD VIEW FROM CONNECTOR MOUNTED SIDE
BOTTOM OF BOARD IN APPLICATION

NOTES:

- 1 ALL TOLERANCES ±.15 UNLESS NOTED.
- 2 THIS HOLE REQUIRED FOR HEADERS WITH BOARD LOCATOR.
- 3 KEEP-OUT ZONE FOR ASSEMBLIES SHOWN ON SHEET 9 FIGURE B.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		 FCI www.fciconnect.com			
ltr	ecn no	dr	date	linear	.X±.3	projection	title		
M					.XX±.13				5V EJECT HEADER ASSY
					.XXX±.051				
				angles	0° ±2'		product family		
				dr	G.CLEMENS		12/20/99	MCS	
				enr	D.BRANN	12/20/99	code		
				chr	D.BRANN	12/20/99	size		
				appd	D.BRANN	12/20/99	dwg no		
							A4		
							95620		
sheet index	revision sheet						scale		
							1:1		
							cage code		
							26		

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.