
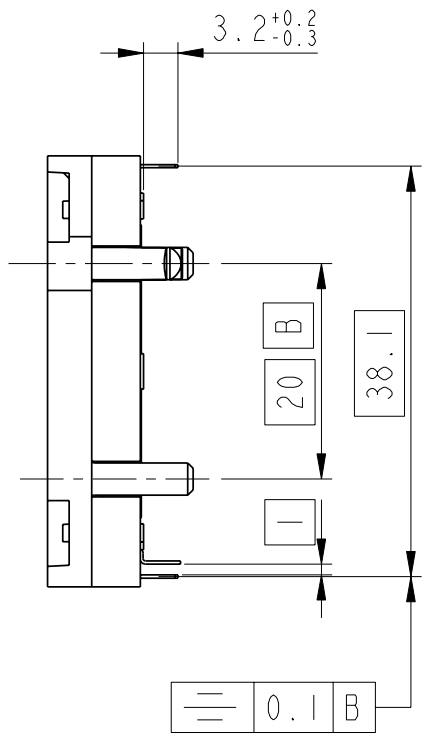
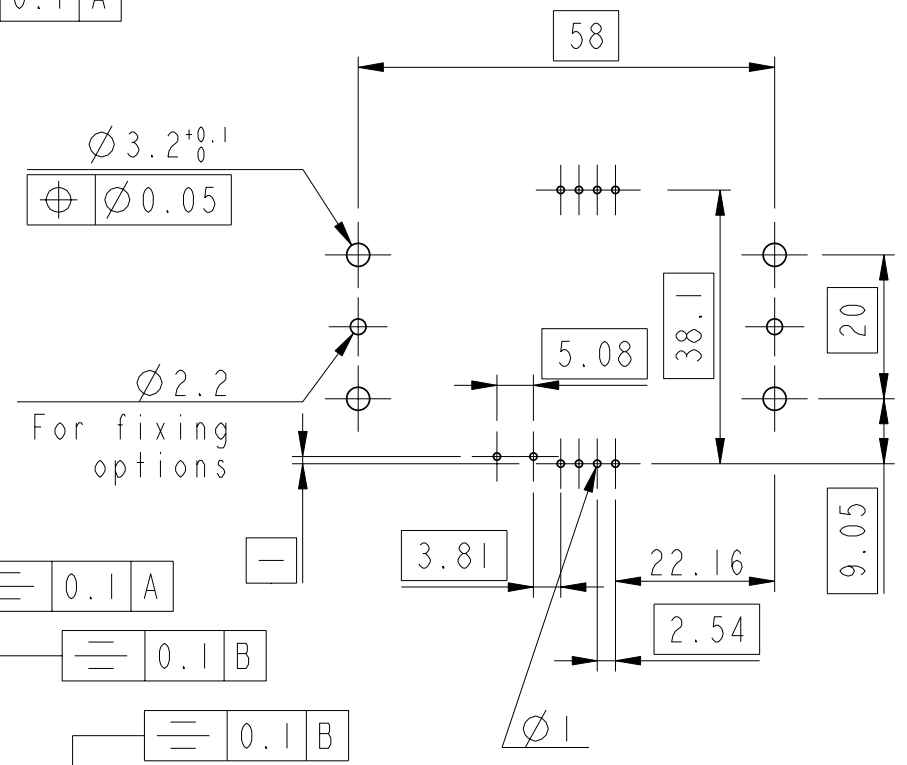



CATALOGUE NUMBER
7434LI025V01
7434LI025V01LF

LEAD FREE Version

IMPLANTATION C.1
PCB FOOTPRINT

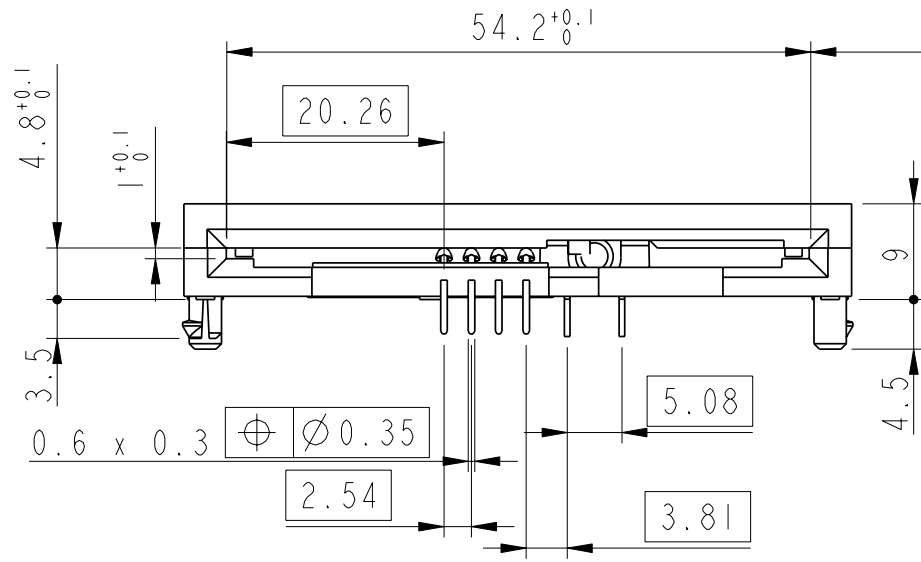

Crimping part to use with a thickness PCB of 1.6 holes $\phi = 3.2^{+0.1}_0$

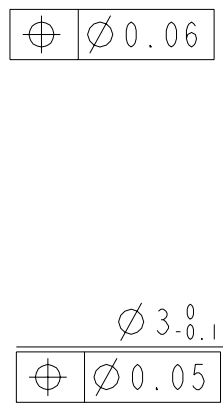

Tol Gen: 0mm to 10mm ± 0.1 mm
10mm to 30mm ± 0.15 mm
30mm to 60mm ± 0.2 mm
60mm and above ± 0.3 mm



Copyright FCI.

LEAD FREE VERSION:

"This product meets European Union Directives and other country regulations as described in GS-22-008"

The housing will withstand exposure to 260°C peak temperature for 10seconds in a wave solder application with a 1.6mm minimum thick circuit board

rev	ecn no	dr	date
A	F20307	DLE	2002/04/29
B	105-0181	DTK	2005/12/28
C	106-0078	DTK	2006/06/19
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface - <input checked="" type="checkbox"/> ISO:1302	tolerance std ISO:406 ISO:1101	projection	MM
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	D.LEGRAND	02/04/29	ANGULAR	0.x ±	size A3
Eng	F.TISSERAND	02/04/29	LINEAR	0.xx ±	Scale 3:2
Chr	DILIPTHOMAS	2006/06/19	0° ±°	0.xxx ±	ECN 106-0078
Appr	DILIPTHOMAS	2006/06/19	Product family SMARTCARD	Spec ref -	
FCI		title SMARTCARD ASSEMBLY		dwg no VJW53519	Rev. C
L10		catalog no SEE TABLE	CUSTOMER		sheet 1 of 1