図面番号(DRAWING NO.) SJ100002

版数 REV.	年月日 DATE	DCN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
2	6.Mar.2006	059532	CORRECTED A ERROR IN WRITTING		A.MATSUNAGA	—	A.Natori

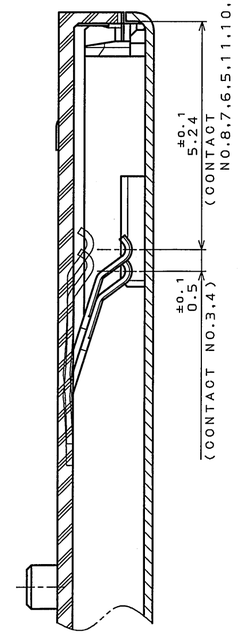

SECT. A-A
(SCALE 10:1)

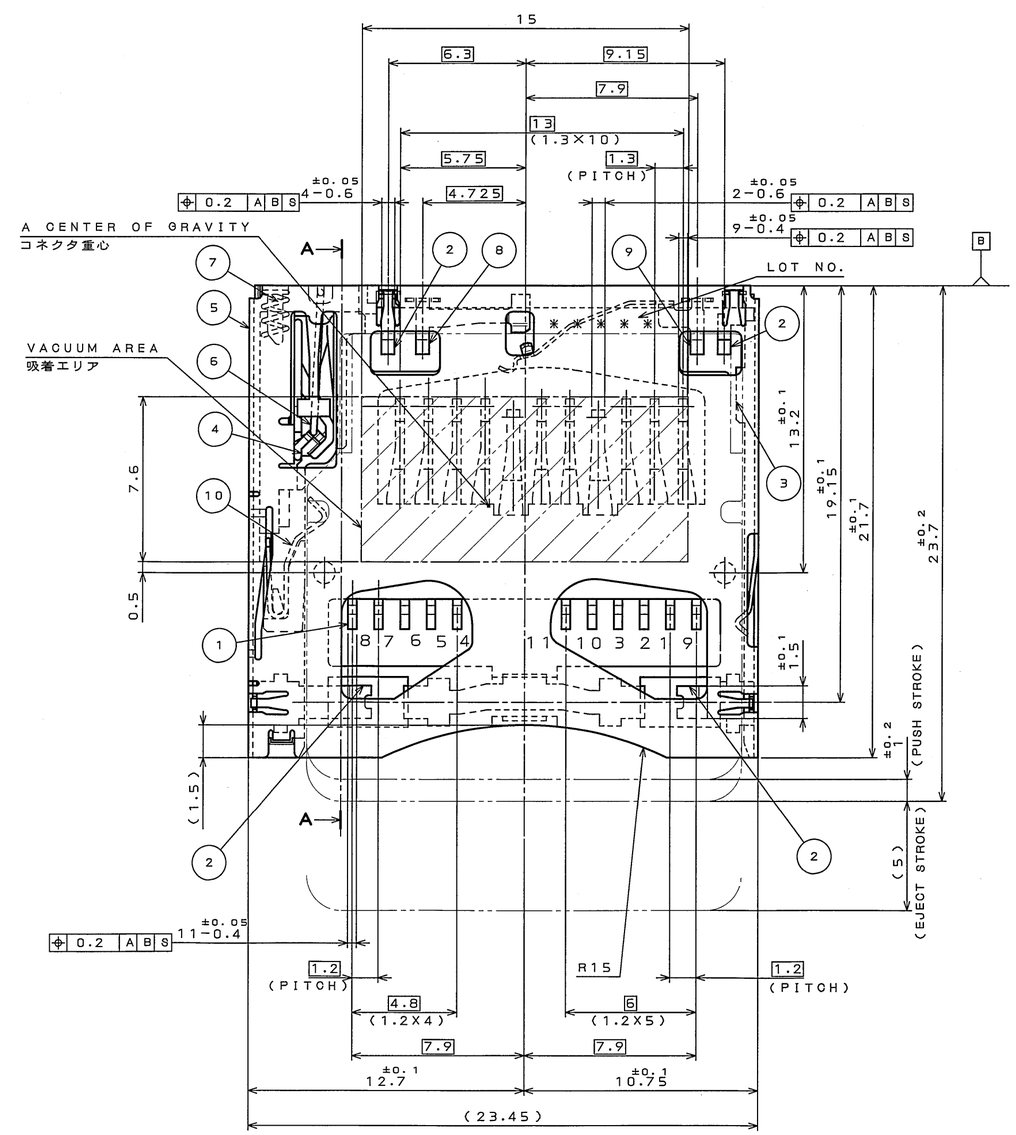

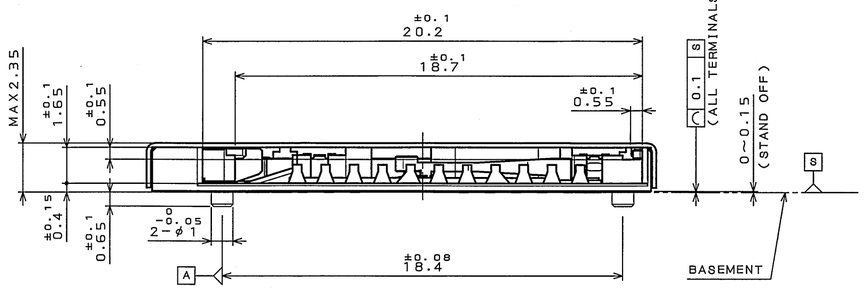

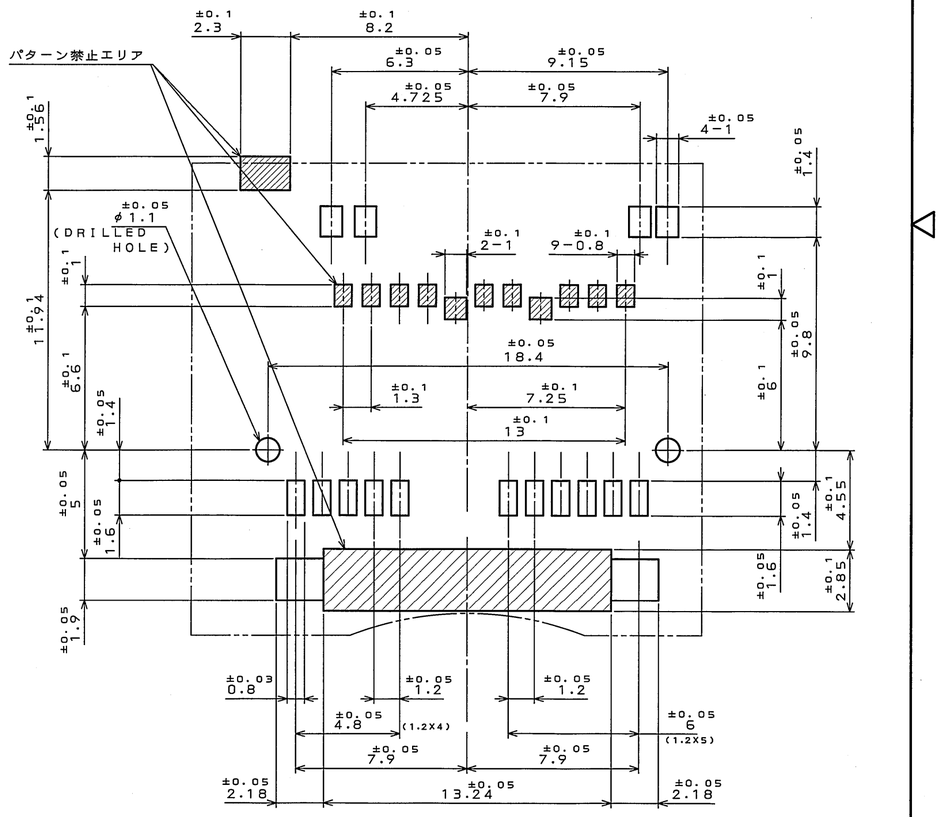

APPLICABLE P.C.B. DIMENSION(REF.)
適合基板寸法(参考)

NO.	DESCRIPTION	QTY.	MATERIAL	FINISH	REMARKS
10	CARD LOCK	1	STAINLESS		
9	DETECTION SWITCH CONTACT 1	1	COPPER ALLOY	CONTACTING AREA:GOLD OVER NICKEL TERMINAL AREA:GOLD FLASH OVER NICKEL	
8	DETECTION SWITCH CONTACT 2	1	COPPER ALLOY	CONTACTING AREA:GOLD OVER NICKEL TERMINAL AREA:GOLD FLASH OVER NICKEL	
7	SPRING	1	PIANO WIRE	ZINC PLATING	
6	CAM FOLLOWER	1	PIANO WIRE	NICKEL	
5	COVER	1	STAINLESS		
4	EJECT LEVER	1	GLASS FILLD Ny		UL94 V-0
3	HOUSING	1	GLASS FILLED LCP		UL94 V-0
2	HOLD DOWN	4	COPPER ALLOY	GOLD FLASH OVER NICKEL ⚠	
1	CONTACT	9	COPPER ALLOY	CONTACTING AREA:GOLD OVER NICKEL TERMINAL AREA:GOLD FLASH OVER NICKEL	

NOTE1.The thickness of reinforcement board is 0.6MIN, when the product will mount on FPC.
NOTE2.CIRCUIT(TABLE.1)(REFERENCE)

注1.FPC搭載時の補強板厚は0.6以上とする.
注2.回路図(表1)(参考)

TABLE1.CIRCUIT(REF.)

	WITHOUT CARD	CARD INSERTED
DETECTION SWITCH	9 — 8 GND	9 — 8 GND

仕様書(SPECIFICATION)		第1版(ORIGINAL DATE)	3.Sep.2003
一般公差(GENERAL TOLERANCE)		製図 DR.	
寸法(DIMENSION)	角度(ANGLES)	担当 CHK.	M.KODERA
.× ±0.8	×° ±	査閲 APPD.	A.NATORI
.×× ±0.4	××' ±	承認 APPD.	K.SUZUKI
.××× ±0.1			
.×××±			

尺度(SCALE)	5:1
シリーズ(SERIES)	SC1
名称(TITLE)	SC1SC11V1S2
質量(MASS)	
日本航空電子工業株式会社 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.	
図面番号(DRAWING NO.)	SJ100002
版数(REV.)	2
SIZE	A2

JAE CONNECTOR.COM Reference Only

JAE CONNECTOR DIV. PROPRIETARY.
COPYRIGHT (C) 2003, JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.

DOF-0-213F(05.08)

0 10 20 30 40 50 60 70 80 90 100