






DWG. NO. SD-54432-004

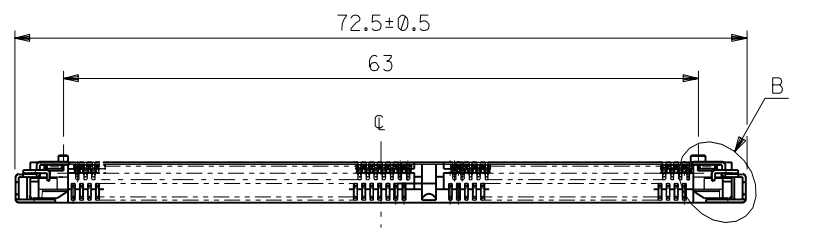

詳細 B
DETAIL B
(SCALE:5-1)

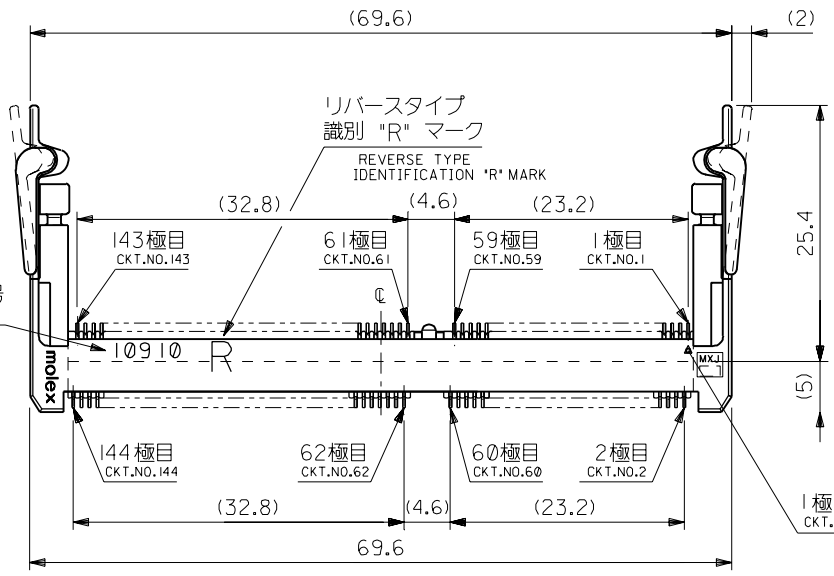

ロット番号
LOT No.

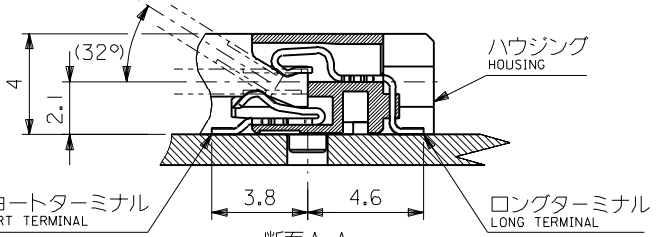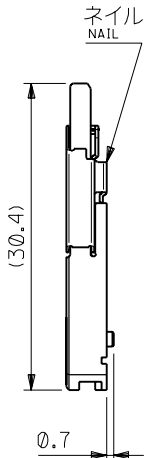


断面 A-A
SECTION A-A
(SCALE:5-1)

注記 NOTES

1. 材料 MATERIAL
ハウジング : ガラス入り耐熱樹脂、白色、UL94V-0
HOUSING : G.F.HEAT RESISTANT PLASTIC, WHITE, UL94V-0
ターミナル : 燐青銅
TERMINAL : PHOSPHOR BRONZE
ネイル : 黄銅
NAIL : BRASS

2. めっき仕様 PLATING
ロングターミナル LONG TERMINAL
接点部 : 金めっき 0.25µmMIN.
CONTACT AREA : GOLD 0.25 µmMIN.
半田付け部 : 半田めっき 1.0µmMIN.
SOLDER TAIL AREA : TIN-LEAD 1.0µmMIN.
下地めっき : ニッケルめっき 2.0µmMIN.
UNDER-PLATING : NICKEL 2.0µmMIN.
ショートターミナル SHORT TERMINAL
接点部 : 金めっき 0.25µmMIN.
CONTACT AREA : GOLD 0.25 µmMIN.
半田付け部 : 金めっき 0.3µmMAX.
SOLDER TAIL AREA : GOLD 0.3µmMAX.
下地めっき : ニッケルめっき 2.0µmMIN.
UNDER-PLATING : NICKEL 2.0µmMIN.
ネイル NAIL
半田めっき : 2.0µmMIN.
TIN-LEAD : 2.0µmMIN.

3. テール平坦度は、0.1 MAX. とする。
TAIL COPLANARITY TO BE 0.1 MAX.
ネイル平坦度は、0.1 MAX. とする。
NAIL COPLANARITY TO BE 0.1 MAX.



1.75	2.85	1.35	3.25	4.05	***V	標準トレイ NORMAL TRAY	54432-1442	54432-144*
3.25	1.35	2.85	1.75	5.55	5.0V	標準トレイ NORMAL TRAY	54432-1441	
2.5	2.1	2.1	2.5	4.8	3.3V	ハードトレイ (高さ9) HARD TRAY(HIGHT 9)	54432-1446	
						ハードトレイ (高さ11) HARD TRAY(HIGHT 11)	54432-1443	
						標準トレイ NORMAL TRAY	54432-1440	
E	D	C	B	A	POWER SUPPLY	梱包トレイ PACKAGING TRAY	MATERIAL NO.	MODEL NO.


DO NOT SCALE DRAWING

EC NO. DRWN: CHK'K: APPR:	EC NO. DRWN: CHK'K: APPR:	EC NO. J2002-0547 DRWN: T.KANEKO CHK'K: Y.IITO APPR: H.IKESUGI	EC NO. JD91395 DRWN: T.KANEKO CHK'K: Y.IITO APPR: H.IKESUGI	EC NO. JD81667 DRWN: T.KANEKO CHK'K: Y.IITO APPR: H.IKESUGI	MATERIAL 材料	DESCRIPTION	WIRE RANGE 適用線径範囲	INS. RANGE 被覆外径
		REVISED	REVISED	RELEASED	注記参照 SEE NOTES	注記参照 SEE NOTES		

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差	SCALE 2-1	DESIGN UNITS mm □ INCH	THIRD ANGLE PROJECTION
10 UNDER 未満	±0.2	DRAWN BY & DATE T.Kanebo '98/06/04	TITLE: 0.8mm PITCH S.O.DIMM SOCKET REVERSE TYPE H=4mm
10 OVER 以上	±0.25	CHECKED BY & DATE Y.Oh '98/06/04	MATERIAL NO. DRAWING NO. SHEET NO.
30 OVER 以上	±0.3	APPROVED BY & DATE H.IkESUGI '98/06/04	
ANGLE 角度	±3°	CAD FILE NAME 54432004.S01	SEE CHART SD-54432-004

DIMENSIONS: <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm ONLY		SHT	REV
REVISION ON CAD ONLY			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			
SIZE B		EN-02J(097) MXJ-54	

A 54380004.S01

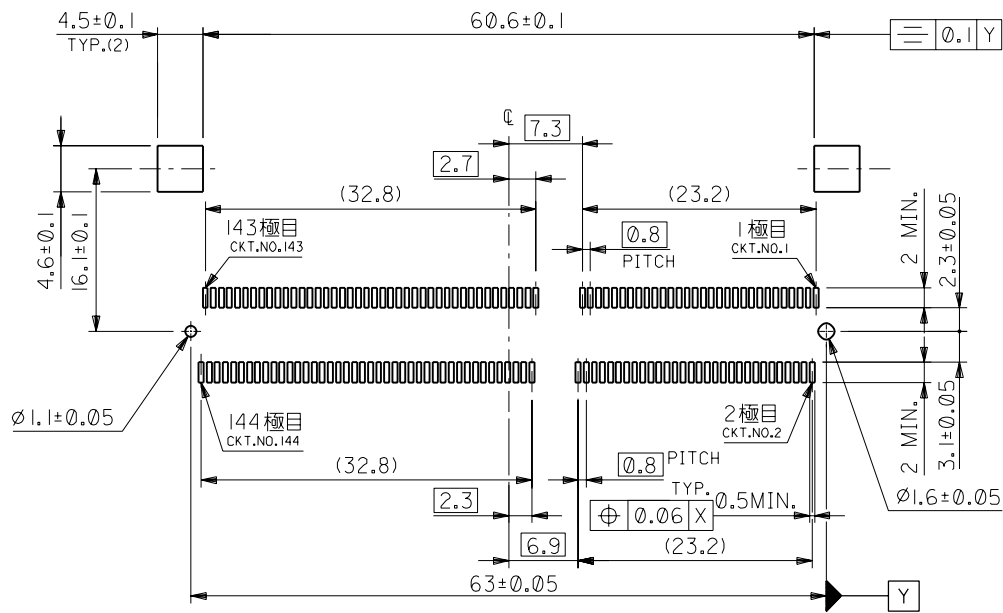


推奨基板寸法
RECOMMENDED PCB PATTERN LAYOUT
(THK:1.2±0.1)

DO NOT SCALE DRAWING

EC NO. DRAWN: CHK'g: APPR:	EC NO. DRAWN: CHK'g: APPR:	EC NO. DRAWN: CHK'g: APPR:	EC NO. DRAWN: CHK'g: APPR:	EC NO. DRAWN: CHK'g: APPR: SEE 1 OF 3	DESCRIPTION MATERIAL 材料 注記参照 SEE NOTES FINISH 仕上げ 注記参照 SEE NOTES WIRE RANGE 適用電線範囲 — # INS. RANGE 被覆外径 — #	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差 10 UNDER 未満 ±0.2 10 OVER 30 UNDER 以上 未満 ±0.25 30 OVER 以上 ±0.3 ANGLE 角度 ±3°	SCALE 2-1 DESIGN UNITS mm INCH THIRD ANGLE PROJECTION DRAWN BY & DATE <i>J. Harber</i> '98/06/04 CHECKED BY & DATE <i>Y.O.</i> '98/06/04 APPROVED BY & DATE <i>J.P. (Signature)</i> '98/06/04 CAD FILENAME 54432004.S02	DIMENSIONS: <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm ONLY SHT REV REVISE ON CAD ONLY	TITLE: 0.8mm PITCH S.O.DIMM SOCKET REVERSE TYPE H=4mm MOLEX INCORPORATED MATERIAL NO. DRAWING NO. SHEET NO.
B	A	0							2 OF 3

54380004.S02

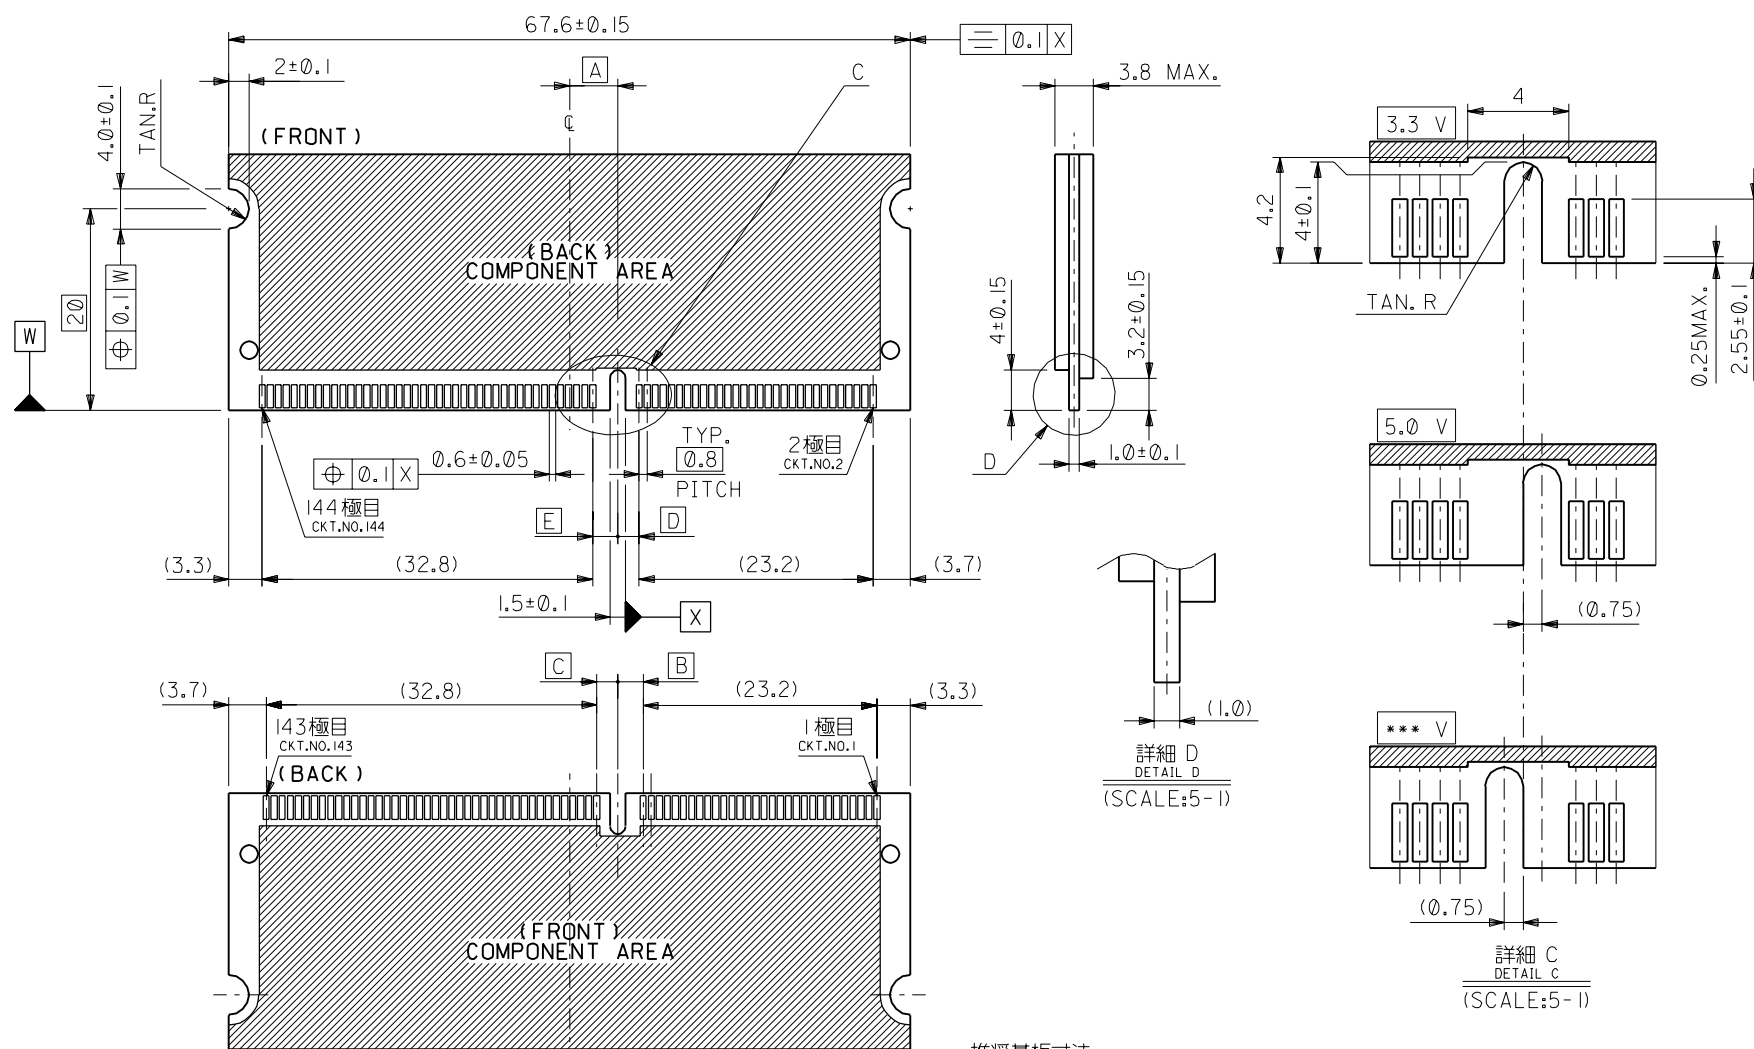

推奨基板寸法
RECOMMENDED MATING BOARD CONFIGURATION
(THK:1.0±0.1)

DO NOT SCALE DRAWING

EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	DESCRIPTION	MATERIAL 材料	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差	SCALE 2-1	DESIGN UNITS mm INCH	THIRD ANGLE PROJECTION	DIMENSIONS: <input type="checkbox"/> mm <input type="checkbox"/> INCH	SHT	REV
							FINISH 仕上げ					UNDER 未満	30 UNDER 未満	30 OVER 以上
						SEE NOTES	注記参照 SEE NOTES	10 UNDER 未満	±0.2	DRAWN BY & DATE J. Harada '98/06/04	TITLE: 0.8mm PITCH S.O.DIMM SOCKET REVERSE TYPE H=4mm			
						SEE NOTES	注記参照 SEE NOTES	10 OVER 以上	±0.25	CHECKED BY & DATE Y. Ota '98/06/04	MOLEX INCORPORATED			
						WIRE RANGE 適用電線範囲	— #	30 OVER 以上	±0.3	APPROVED BY & DATE H. Harada '98/06/04		MATERIAL NO. SEE CHART	DRAWING NO. SD-54432-004	SHEET NO. 3 OF 3
						INS. RANGE 被覆外径	— #	ANGLE 角度	±3°	CAD FILENAME 54432004.S03				SIZE B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.