

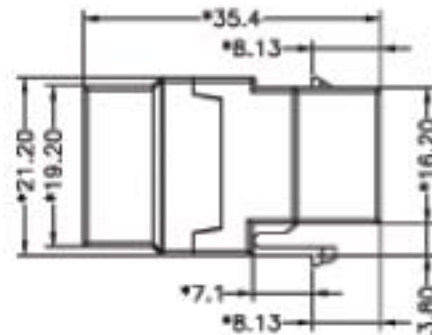



REVISION RECORD				
REV	ECO	DESCRIPTION	DATE	CHKD
△		ADD PART NUMBER	06/23/10	
△		DRAWING MODIFY	06/16/11	



**MECHANICAL:**

1. HOUSING MATERIAL: PC UL94V-0
2. INSERT MATERIAL: PBT+20%GF UL94V-0
3. PCB MATERIAL: FR-4 THICKNESS: 1.6mm
4. CONTACT MATERIAL: PHOSPHOR BRONZE  
STAMP PIN T=0.35mm
5. ROHS COMPLIANT

**NOTES:**

**ELECTRICAL:**

- |                          |                               |
|--------------------------|-------------------------------|
| 1. VOLTAGE RATING        | : 125 VAC RMS.                |
| 2. CURRENT RATING        | : 1.5 AMP.                    |
| 3. CONTACT RESISTANCE    | : 100 MILLIOHMS MAX.          |
| 4. INSULATION RESISTANCE | : 1000 MEGOHMS MIN @ 500 VDC. |
| 5. DIELECTRIC STRENGTH   | : 750 VAC RMS 60Hz, 1MIN.     |

**ENVIRONMENTAL:**

- |              |                   |
|--------------|-------------------|
| 1. STORAGE   | : -40°C TO +85°C. |
| 2. OPERATION | : 0°C TO 70°C.    |

CONFORM TO TIA/EIA 568 B.2-1  
MATES WITH MODULAR PLUG CONFORMING TO  
FCC PART 68, SUBPART F.

		DATE: 06/16/11 CHECKED: [Signature] DESIGNED: [Signature]	<b>ASSMANN Electronics</b>	
TITLE: <b>A-TA3535-R (CAT6)</b>	DRAWING NO.: /PART NO. SEE NOTE		SHEET: A3 REV: 3	SHEET X OF Y
MATERIAL: QTY: 1 FINISH:	SCALE: 1:1		DO NOT SCALE DRAWING	

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1