

NOTES :

1- MATERIAL:




-HOUSING: POLYESTER FIBER GLASS FILLED UL 94-V0
COLOR BLACK.

-TERMINAL: PHOSPHOR BRONZE.


PLATING :

POST PLATE 0.00127-0.00152/.000050-.000060 GOLD IN
CONTACT AREA ,0.00190/.000075 MIN PURE TIN
IN TAIL AREA BOTH OVER 0.00127/.000050 MIN NICKEL
OVERALL.

- 2- JACK FOR MATING WITH F.C.C. 68 PLUGS (90075 MOLEX SERIES).
- 3- PRODUCT SPECIFICATION PS-95003 AND PS-85505 (SECTION 5.2).
- 4- APPLICATION SPECIFICATION AS-95001.
- 5- PACKAGING SPECIFICATION PK-95003 SHEET 1:
(TRAY PACKAGING).
- 6- EXCEEDS CATEGORY 5E PERFORMANCE.

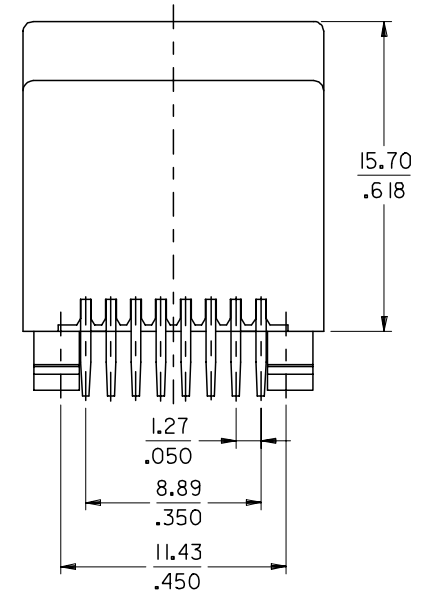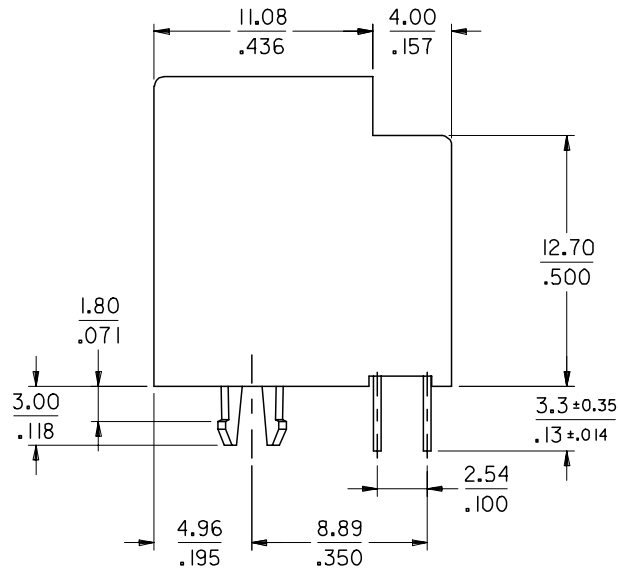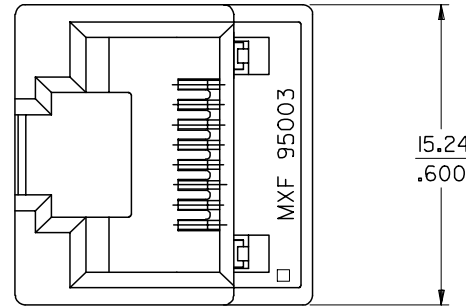

P.C.B. MOUNTING PATTERN
(see from component side)

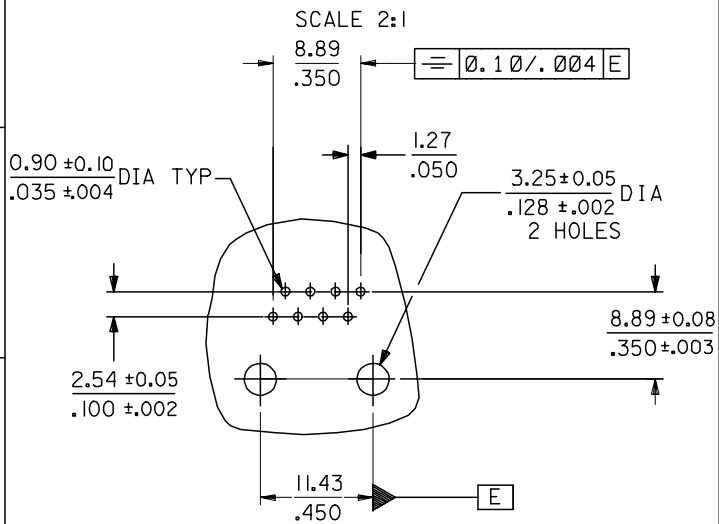

ENTER DESCRIPTION EC NO: MG2005-0151 DRAWN: CEBASTI 2004/10/25 CHKD: FCARABET 2004/10/25 APPR: KNOLLER 2004/11/09	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN	SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				DRAWN BY HB	DATE 99/08/18	TITLE HIGH SPEED MODULAR JACK TOP ENTRY LOW PROFILE THROUGH HOLE 8 CKTS		
				CHECKED BY ER	DATE 99/08/18	MOLEX INCORPORATED		
				APPROVED BY FB	DATE 99/08/18	MATERIAL NO. 85511-0001	DOCUMENT NO. SD-85511-001	SHEET NO. 1 OF 1
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						