


SECTION A-A

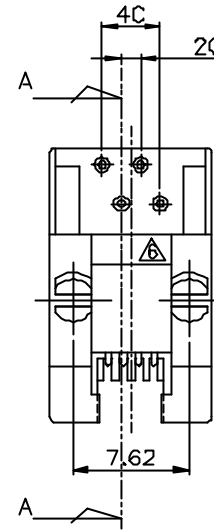

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		MODIFY PART NO.	8/23/98	
△		MODIFY DIMENSION	8/24/02	
△		MODIFY DIMENSION	13/18/04	
△		ADD PART NUMBER	08/01/04	
△		MODIFY DRAWING	07/01/00	
△		MODIFY DRAWING	07/16/00	
△		MODIFY NOTES	10/24/00	

NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS.
- CURRENT RATING: 1.5 AMP.
- CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH: 1000 VAC RMS 60HZ, 1MIN. (W/CAD 2004 刚 /)



MECHANICAL:

- HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0. STAND COLOR BLACK.
- CONTACT MATERIAL: PHOSPHOR BRONZE. $\phi 0.46\text{mm}$.
- PLATING: GOLD PLATING OVER NICKEL.
- OPERATING LIFE: 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER: 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE: -40°C TO $+85^{\circ}\text{C}$.
 - OPERATION: 0°C TO 70°C .
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
UL & CUL FILE NO. E163191

PART NUMBER: E534X-000X1X

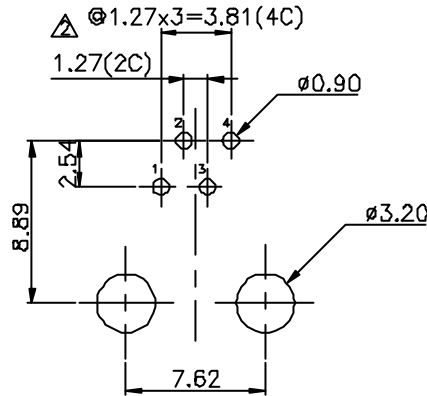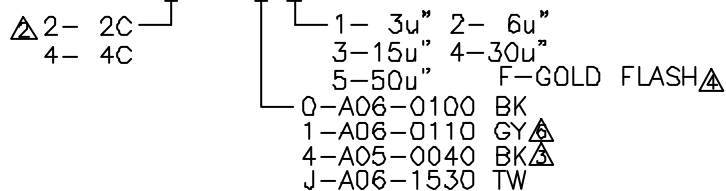

Thickness=1.60mm
PC Board Layout Component Side Shown

DETACHED UNIT	MM (INCH)	DATE 9/10/97	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD DATE	TITLE	
	MM	MFO DATE	90° VERY L/P PCB JACK 4P	
	.00 ± 0.02 .00 ± 0.10 .000 ± 0.075	APPVL 0808 DATE 10/28/06	DRAWING NO. GE33001	
ANGLES ± 0.5	MATERIAL :	/PART NO. SEE NOTE		
THIRD ANGLE PROJECTION	QTY	DRAWING NO. GE33001		
	FINISH	/PART NO. SEE NOTE		
	SCALE 3:1	SHEET 7		
		DO NOT SCALE DRAWING		