
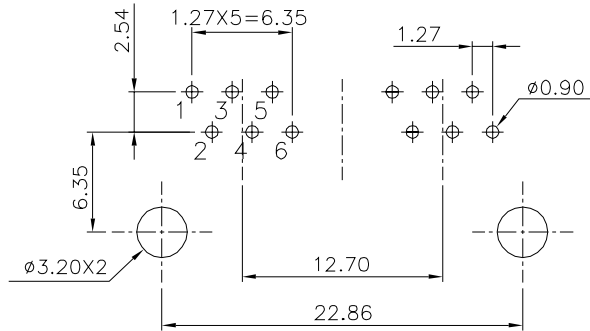
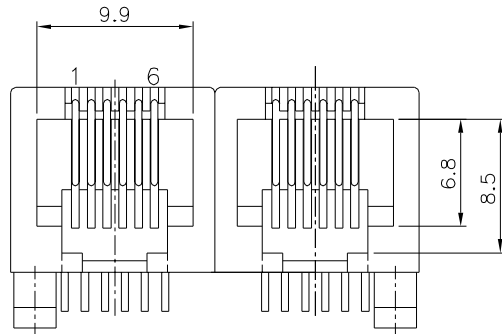


SECTION A-A

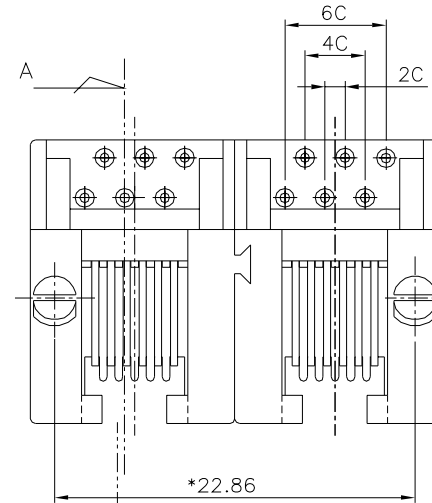

PC Board Layout T=1.6mm  
Component Side Shown Tolerance±0.05mm

**NOTES:**

**ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

**MECHANICAL:**

1. HOUSING MATERIAL : NYLON UL94V-0.COLOR:BLACK
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**

1. STORAGE TEMPERATURE : -40°C TO +85°C.
2. OPERATION TEMPERATURE: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 255~265°C (5~10 SECONDS)
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO  
FCC PART 68, SUBPART F.

PART NUMBER	CONTACTS	GOLD PLATING
E5362-00A512-L	2	6u"
E5364-00A512-L	4	6u"
E5366-00A512-L	6	6u"

DETACHED LISTS	← MM (INCH) →	<b>RoHS Compliant</b>			
	TOLERANCES EXCEPT AS NOTED		TITLE 90° VERY L/P (ROHS) PCB GANG JACK 6P		
	MM				
	.0 ± 0.2	±			
	.00 ± 0.15	±			
	.000 ± 0.075	±			
	ANGLES ± 0.5				
	THIRD ANGLE PROJECTION		DFTO Cathy	DRAWING NO. CE533085-LA	
			DATE 08/22/2006	/PART NO. SEE TABLE	
			SCALE : 3:1	DO NOT SCALE DRAWING	SHEET 1 OF 1
				SIZE A3	REV 0