
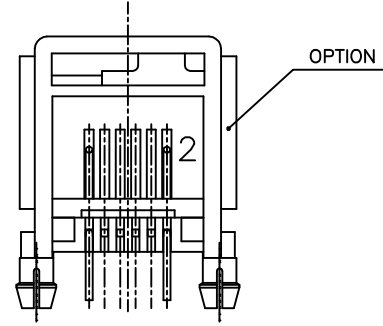


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

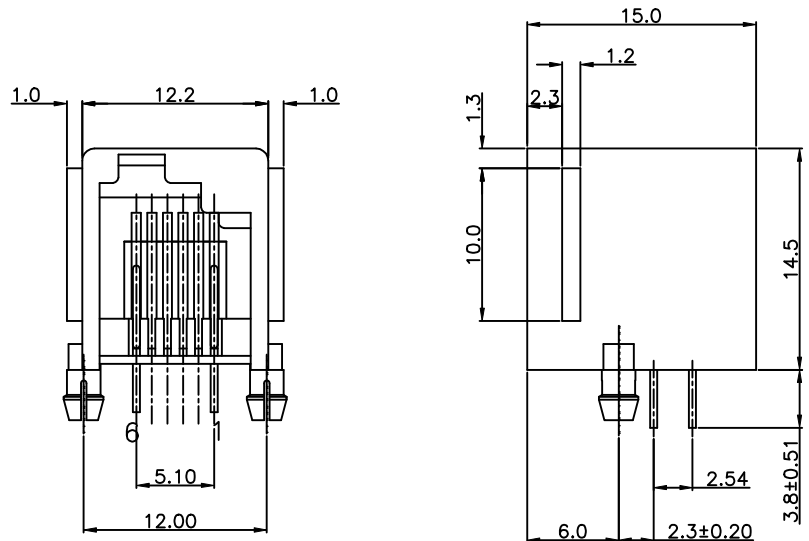

**NOTES:**

**ELECTRICAL:**

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

**MECHANICAL:**

- HOUSING MATERIAL : PBT+20%.G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE  $\phi 0.46\text{mm}$ .
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**


- STORAGE :  $-40^{\circ}\text{C}$  TO  $+85^{\circ}\text{C}$ .
- OPERATION:  $-40^{\circ}\text{C}$  TO  $+85^{\circ}\text{C}$ .
- WAVE SOLDERING TEMPERATURE:  $230^{\circ}\text{C}\sim 250^{\circ}\text{C}$  (3~5 SECONDS)

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

CUL FILE NO. E163191

ROHS PART NUMBER: E5562-D8L01X-L

1- 3u" 2- 6u" 3-15u"  
4-30u" 5-50u"

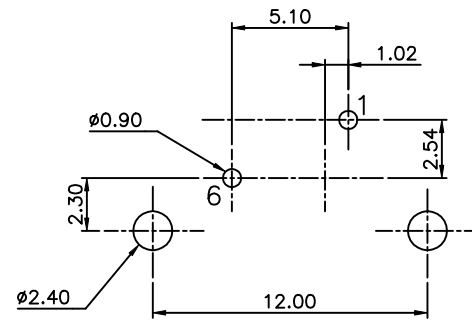

T=1.60

PC Board Layout Component Side Shown

DETACHED LISTS	MM (INCH)	DFTO Qianpu	DATE 4/15/05	FULL RISE ELECTRONIC CO., LTD		
	TOLERANCES EXCEPT AS NOTED	CHKDYCAN	DATE 2005/4/18			
	MM	MFO	DATE	TITLE DEC TYPE L/P PCB JACK		
	.0 $\pm 0.2$	APPVLLUSHENG	DATE 2005/4/18			
.00 $\pm 0.15$	MATERIAL :	DRAWING NO. GE553066-LC		SIZE A3	REV 0	
.000 $\pm 0.075$	ANGLES $\pm 0.5$	QT'Y :	/PART NO. SEE NOTE		DO NOT SCALE DRAWING	SHEET OF
THIRD ANGLE PROJECTION	FINISH :	SCALE : 3 : 1	DO NOT SCALE DRAWING		SHEET OF	