

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.


MECHANICAL:

1. HOUSING & INSERT MATERIAL : NYLON UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION TEMPERATURE: -40°C TO $+85^{\circ}\text{C}$.
3. WAVE SOLDERING TEMPERATURE: 255°C TO 265°C (5-10SECONDS).
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E163191

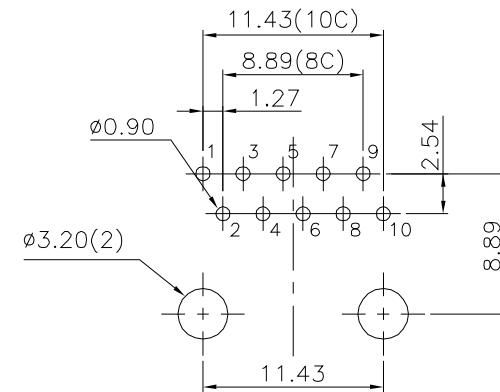

PC Board Layout T= 1.60mm

Component Side Shown Tolerance $\pm 0.05\text{mm}$

PART NUMBER	COLOR	GOLD PLATING
E5608-000362-L	GRAY	6u"
E5608-000562-L	YELLOW	6u"
E5608-000563-L	YELLOW	15u"
E5608-000K72-L	GREEN	6u"
E5608-000K73-L	GREEN	15u"

DETACHED LISTS	MM (INCH)	RoHS Compliant	Pulse A TECHNITROL COMPANY	
	TOLERANCES EXCEPT AS NOTED	TITLE 11.5 SIDE ENTRY PCB GANG JACK 10P		
	MM		DFTO Cathy	DRAWING NO. CE563046-LA
	.0 ± 0.2	±	DATE 08/22/2006	/PART NO. SEE TABLE
	.00 ± 0.15	±	DO NOT SCALE DRAWING	
	.000 ± 0.075	±	SHEET 1 OF 1	
	ANGLES ± 0.5		SCALE : 3:1	SIZE REV A3 0
	THIRD ANGLE PROJECTION			