

PART NUMBER	LED COLOR		TAB	GOLD PLATING
	LED 1	LED 2		
E5J88-11B322-L	GREEN	YELLOW	NO TAB	6u"
E5J88-31B322-L	YELLOW	GREEN	NO TAB	6u"
E5J88-34B322-L	YELLOW	GREEN	TOP TABS & SIDE TABS	6u"

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
- LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.
- OPERATING: 750 CYCLES MIN.


MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED NYLON UL94V-0. COLOR-BLACK.
- INSERT MATERIAL : GLASS FILLED NYLON UL94V-0. COLOR-BLACK.
- BACK PLATE MATERIAL : GLASS FILLED NYLON,COLOR-BLACK.
- LED SIZE : 3.2*2.0*7.0*P=2.54mm.
- SHIELD MATERIAL : COPPER ALLOY 0.25mm THICKNESS PLATING NICKEL.
- CONTACT MATERIAL : PHOSPHOR BRONZE 0.35mm THICKNESS.
- CONTACT PLATING : SELECTIVE GOLD PLATING OVER NICKEL.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE TEMPERATURE : -40°C TO +85°C.
- OPERATION TEMPERATURE: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 255~265°C(5~10 SECONDS)
- RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE No:E163191

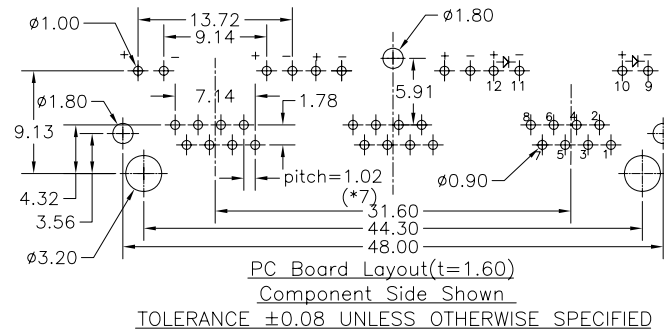

DETACHED LISTS	MM (INCH)	RoHS Compliant			
	TOLERANCES EXCEPT AS NOTED				
	MM		TITLE		
	.0 ± 0.2 ±		RJ45 SIDE ENTRY LED GANG JACK 3 PORTS		
.00 ± 0.15 ±		DFTO CathyLee	DRAWING NO. CE5J3031-LA	SIZE A3	
.000 ± 0.075 ±		DATE 03/05/07	/PART NO. SEE TABLE	REV 0	
ANGLES ± 0.5		SCALE : 2:1	DO NOT SCALE DRAWING	SHEET 1 OF 1	
THIRD ANGLE PROJECTION					