
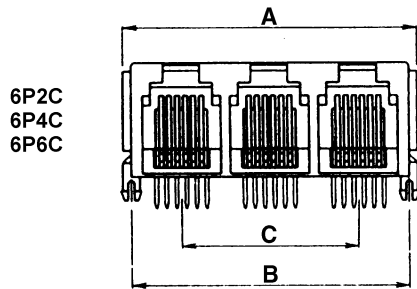


# Series: GJ026

## Mini-Low Profile Ganged Jacks

- ❖ Color - Gray
- ❖ Number of ports (2 to 12)

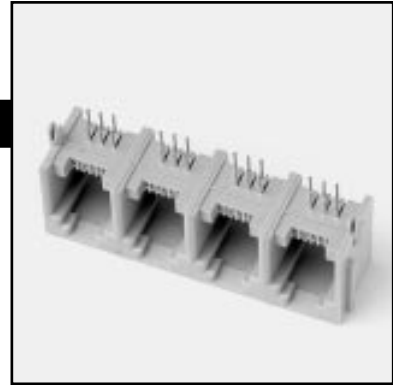


$$A = P \times 11.65(\text{mm}) + 2.50$$



$$B = P \times 11.65(\text{mm}) + 0.50$$

$$C = (P-1) \times 11.65(\text{mm})$$

P = Number of ports

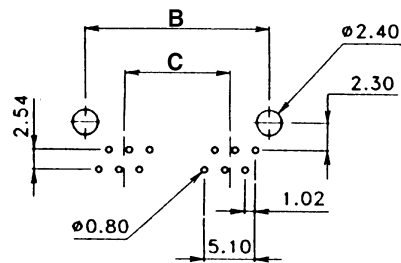

PC Board Layout

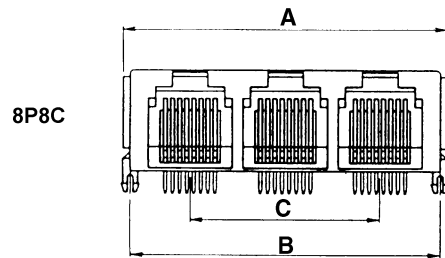


$$A = P \times 14.50(\text{mm}) + 3.00$$

$$B = P \times 14.50(\text{mm}) + 1.00$$

$$C = (P-1) \times 14.50(\text{mm})$$

P = Number of ports



PC Board Layout

Ordering example: **GJ026 - 6P 4C 2 3**

# Specifications

## Ganged Phone Jacks Series:

### GJ

#### Ratings:

Current	1.5A
Dielectric strength	1000V RMS for 1 minute
Contact resistance	20mΩ max.
Insulation resistance	500MΩ min.
Spring wire durability	500 mating cycles min.

#### Material:

Plastic	PBT Glass-filled UL94V-0
Spring wire	0.45mm Dia. Phosphor Bronze, Gold plated over Nickel
Temperature range	-25°C / +90°C

### ORDERING PROCEDURE

1 - 2 3 4 5

- 1) Series
- 2) Number of Positions (# P)
- 3) Number of Contacts (# C)
- 4) Plating:
  - 1 = Full flash gold
  - 2 = Full 10μ gold
  - 3 = Full 30μ gold
  - 4 = Full 50μ gold

- 5) Number of Ports

Please refer to following pages for ordering examples.